

## Specification

- Part No. : **MA131.A.LK.002**
- Product Name : MA131 GPS/GLONASS/GALILEO and ISM Band 915MHz  
2 in 1 Combination Hercules Screw Mount (Permanent  
Thread Mount)
- Features : Stable and High efficiency  
4dBi Gain 915MHz (902MHz to 928MHz) ISM Band  
-200mm RG316 SMA(M)  
GPS/GLONASS/GALILEO -Two Stage 27dB+LNA  
- 200mm RG174 SMA(M)  
Low profile - Height 28.5mm, diameter 47.8mm  
Robust, UV and Vandal resistant PC housing IP67/IP69K  
Water Resistant  
**RoHS Compliant**



## 1. Introduction

The MA131 Hercules antenna is a GPS/GLONASS/GALILEO and ISM Band 915MHz combination 2in1 high performance solution for the most reliable asset tracking and remote monitoring. The integrated metal thread-mount allows for external use on vehicles and outdoor assets worldwide.

The 915MHz ISM Band antenna is ideally mounted on a ground-plane but works well also in free-space mounting conditions. The omni-directional gain pattern, with a peak gain of 4dBi when using shorter cable lengths, ensures constant reception and transmission.

The GPS/GLONASS/GALILEO antenna has been optimized to work on both GPS/GALILEO and GLONASS bands, allowing the antenna to see the maximum amount of satellites in the sky and improving tracking accuracy enormously especially in built up areas, such as urban canyons where traditional GPS-only solutions struggle to maintain a lock driving around corners. A front-end SAW filter attenuates any nearby out of band wireless transmissions so the GPS/GALILEO LNA is not driven into compression or damaged.

The Hercules is also prized by the leading wireless device brands globally due to its unique mechanical construction. The compact size and rugged polycarbonate construction, which can withstand direct attack and hazards such as tree-branches, coupled with a waterproof rating of IP67 and IP69K (waterproof against high pressure industrial cleaning from top and bottom sides) are un-matched in the industry.

The standard cable length and connector option is 200mm RG316 and SMA(M). The cable length and connector are customizable. Taoglas supplies low loss extension cables according to your requirement. Maximum cable length should not go beyond 5 meters in order to maintain adequate antenna performance. The Hercules is also available in White. Contact your regional sales office for further information.

## 2. Specification

### ELECTRICAL ISM Band 915MHz

Operation Frequency (MHz)		915 MHz				
Cable length (M)		0.2	1	2	3	5
In the free space	Average Gain (dB)	-2.91	-3.71	-4.21	-5.01	-6.62
	Efficiency (%)	51.08	42.49	37.86	31.49	21.79
	Peak Gain	0.83	0.04	-0.46	-1.26	-2.86
Cable length (M)		0.2	1	2	3	5
On the 30x30cm ground plane	Average Gain (dB)	-2.94	-3.74	-4.24	-5.04	-6.64
	Efficiency (%)	50.79	42.24	37.65	31.31	21.67
	Peak Gain	4.32	3.52	3.02	2.21	0.62
Max VSWR		2:1				
Max. Return Loss (dB)		-10				
Polarization		Linear				
Impedance		50 Ohms				
Max Input Power		5 Watts				

### ELECTRICAL GPS-GLONASS-GALILEO


Frequency	1574~1606MHz
Impedance	50 ohm
VSWR	2.0 Max
GPS Patch Gain @ Zenith	-1.4dBi Passive Gain @ Zenith
GLONASS Patch Gain @ Zenith	-1.3dBi Passive Gain @ Zenith
Out Band Rejection	fo = 1575.42MHz
	fo ± 30 MHz 5dB Min.
	fo ± 50 MHz 20dB Min.
	fo ± 100 MHz 25dB Min.
Input Voltage	Typ. 2.5~5.5V
Total Gain @ Zenith	27dB typical at 3.0V
Current Consumption	10mA typical at 3.0V
Noise Figure	1.3dB typical

MECHANICAL	
Dimension (mm)	Height = 28.5 mm and Diameter = 47.8 mm
Cable length	200mm RG316 of ISM Band antenna – Fully Customizable 200mm RG174 of GPS/GLONASS antenna –Fully Customizable
Connector	Both are SMA(M)ST – Fully Customizable
Casing	UV Resistant PC
Base and Thread	Nickel Plated Steel
Thread Diameter	18 mm
Weather proof gasket	CR4305
Sealant	Rubber Stopper
Weight	140g (200mm cable length)
ENVIRONMENTAL RATINGS	
Protection	IP67 & IP69K
Corrosion	5% NaCl for 48hrs - Nickel plated zinc base and thread
Temperature Range	-40°C to +85°C
Thermal Shock	100 cycles -40°C to +85°C
Humidity	Non-condensing 65°C 95% RH
Shock (Drop Test)	1m drop on concrete 6 axes
Cable Pull	8 Kgf
Recommended Torque Setting for Mounting	24.5N·m
Maximum Torque Setting for Mounting	29.5N·m

### 3. Antenna Characteristics

#### 3.1 Test Setup

**MA.131.A.LK.002 antenna was tested with R&S ZNB-8 network analyzer.**

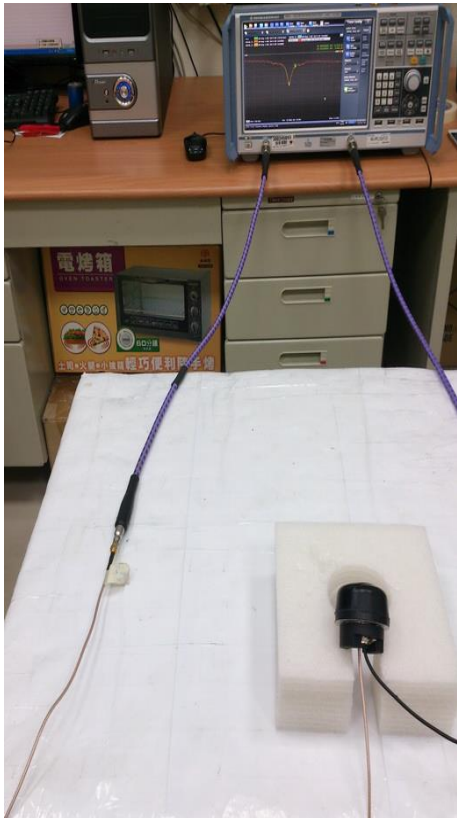

**In free space**




**On 30x30 ground plane**

Taoglas measured the antenna with two states - in free space, and mounted on a 30x30cm ground plane


## 4. 915MHz Antenna

### 4.1 Return Loss

#### 4.1.1 In free space

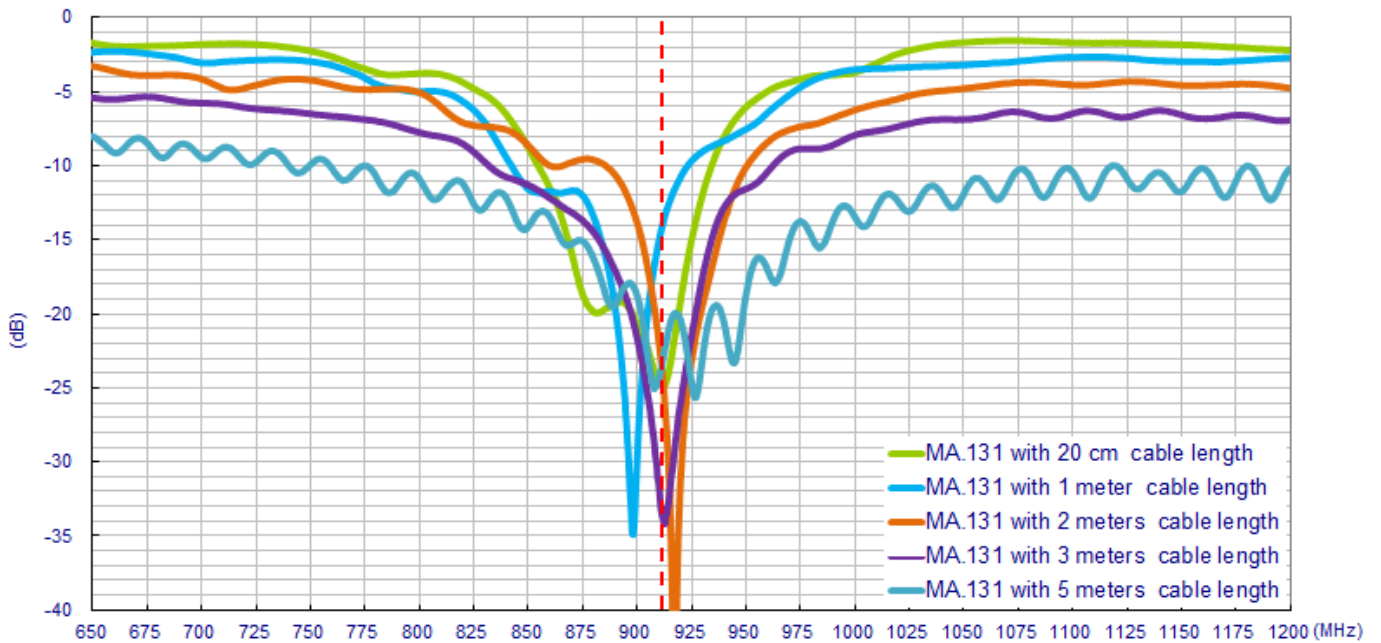


#### 4.1.2 On 30X30cm ground plane

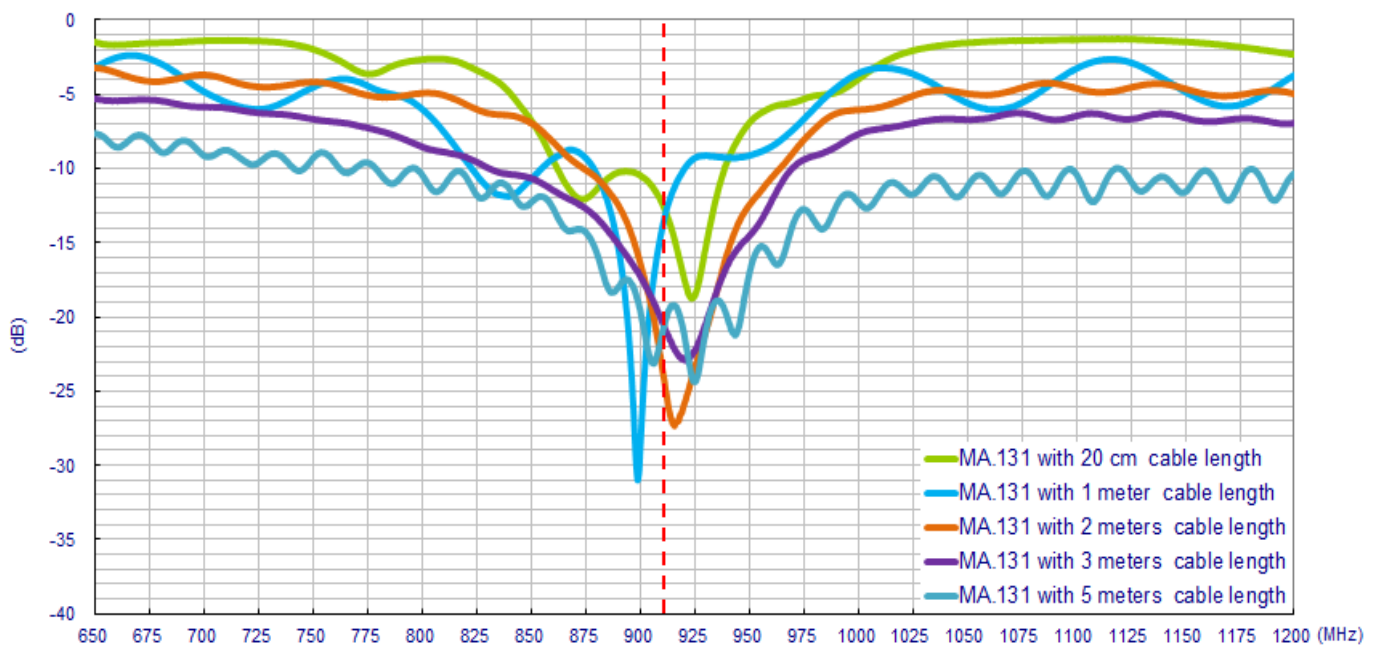


## 4.2 Average Gain

### 4.2.1 In free space

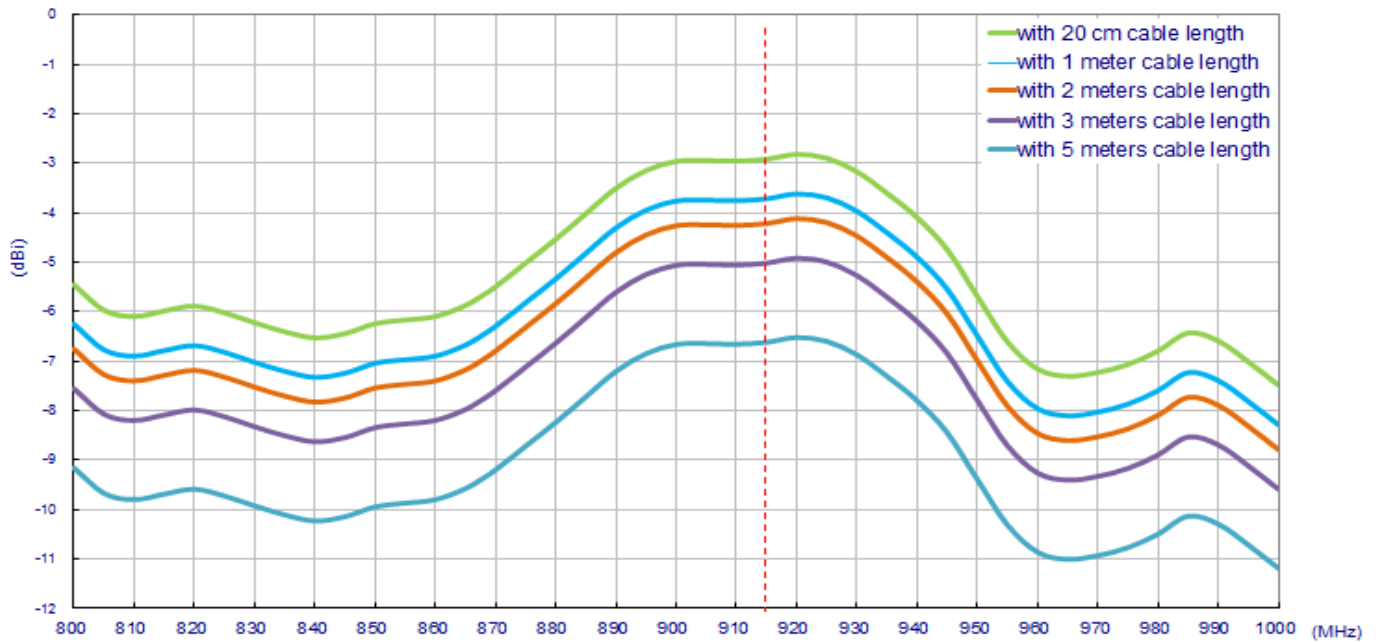


### 4.2.2 On 30x30cm ground plane

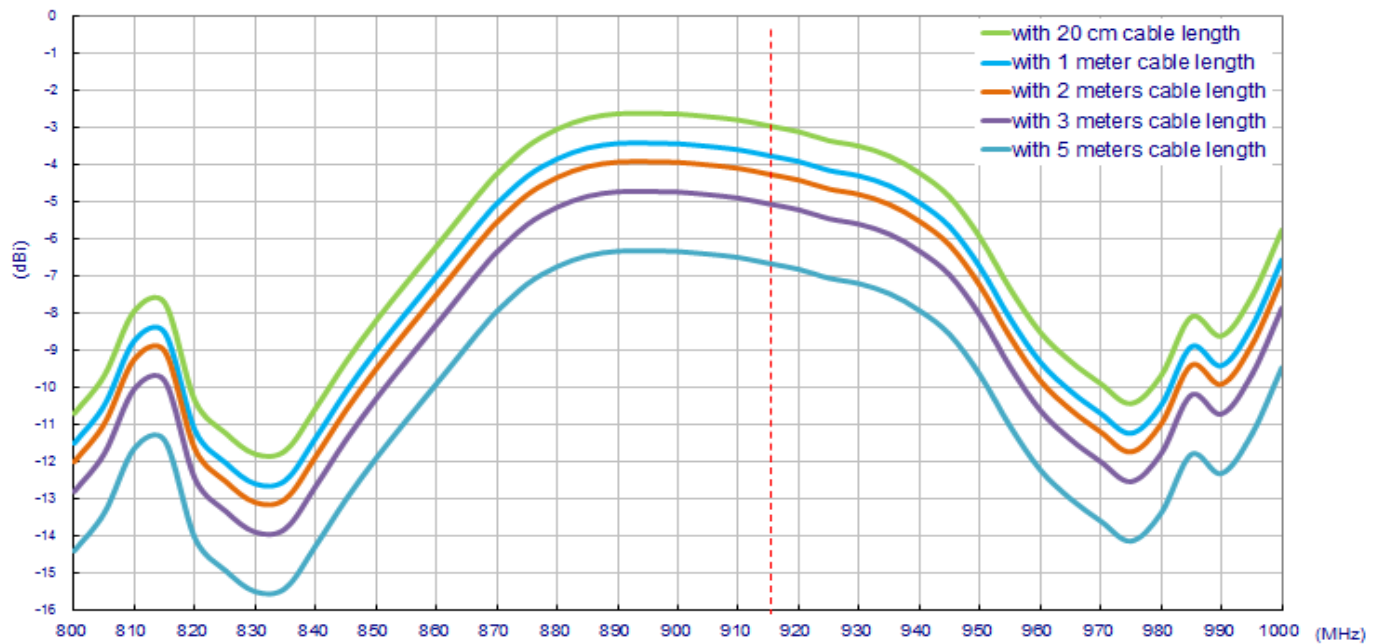


## 4.3 Efficiency

### 4.3.1 In free space

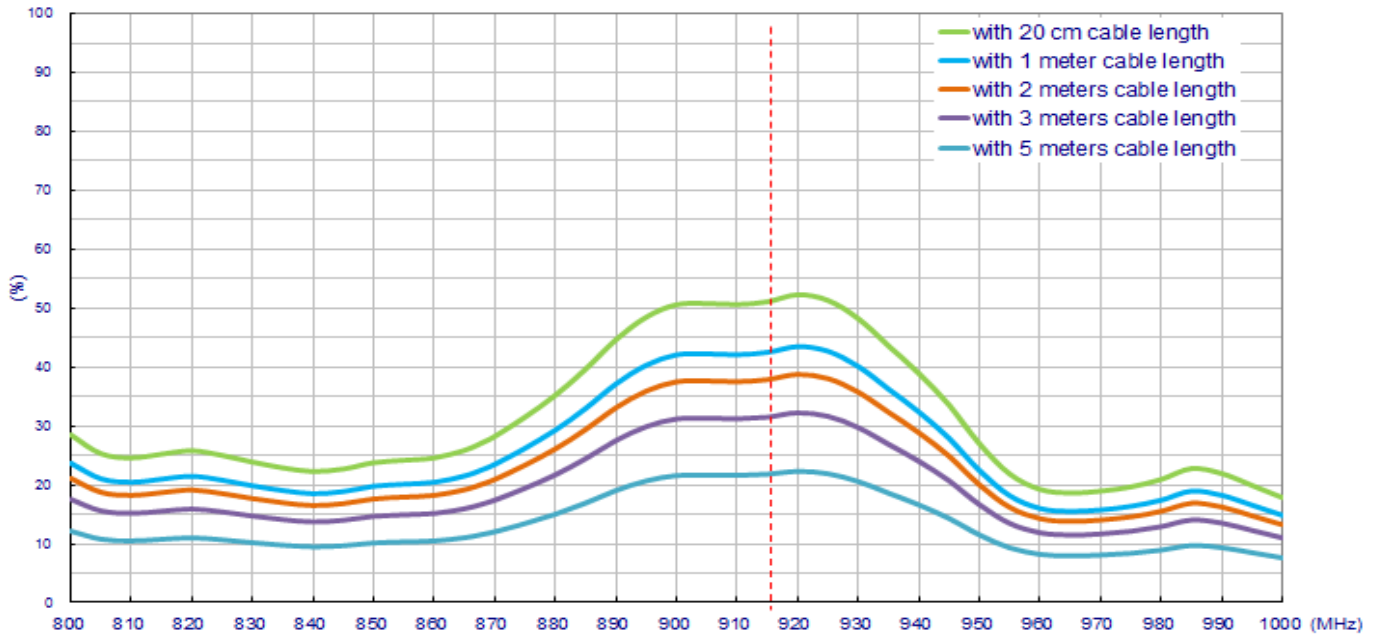


### 4.3.2 On 30x30cm ground plane

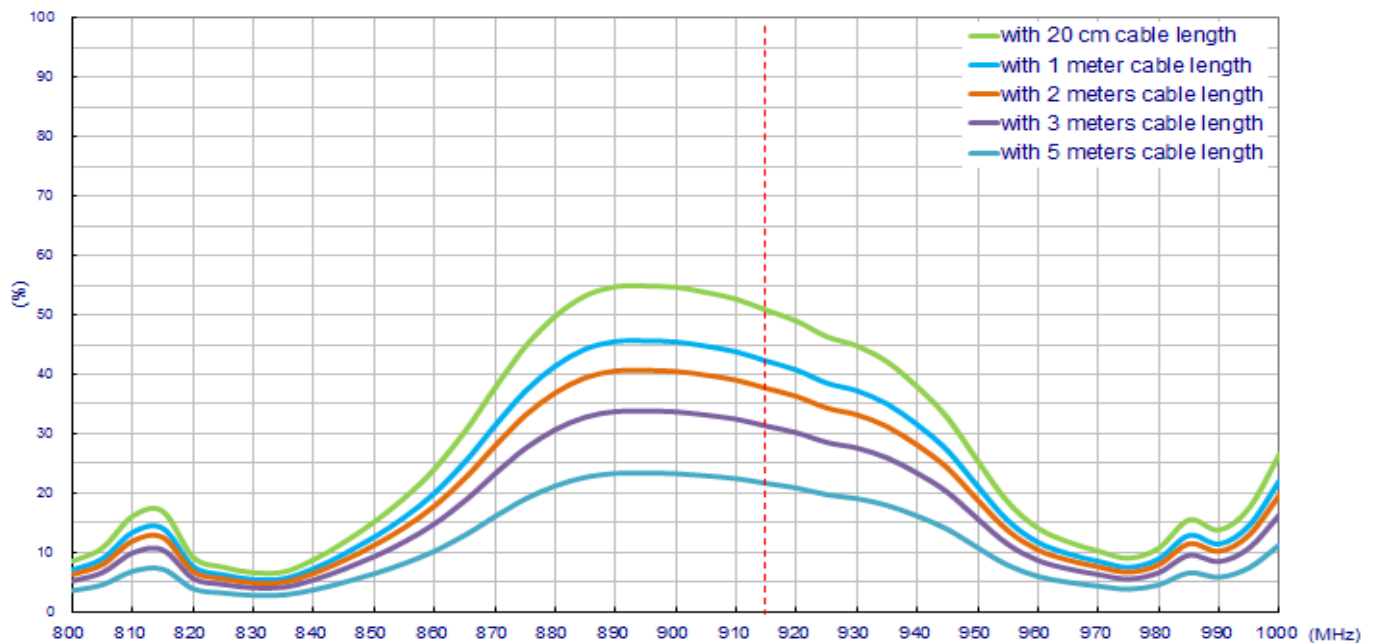




## 4.4 Peak Gain

### 4.4.1 In free space

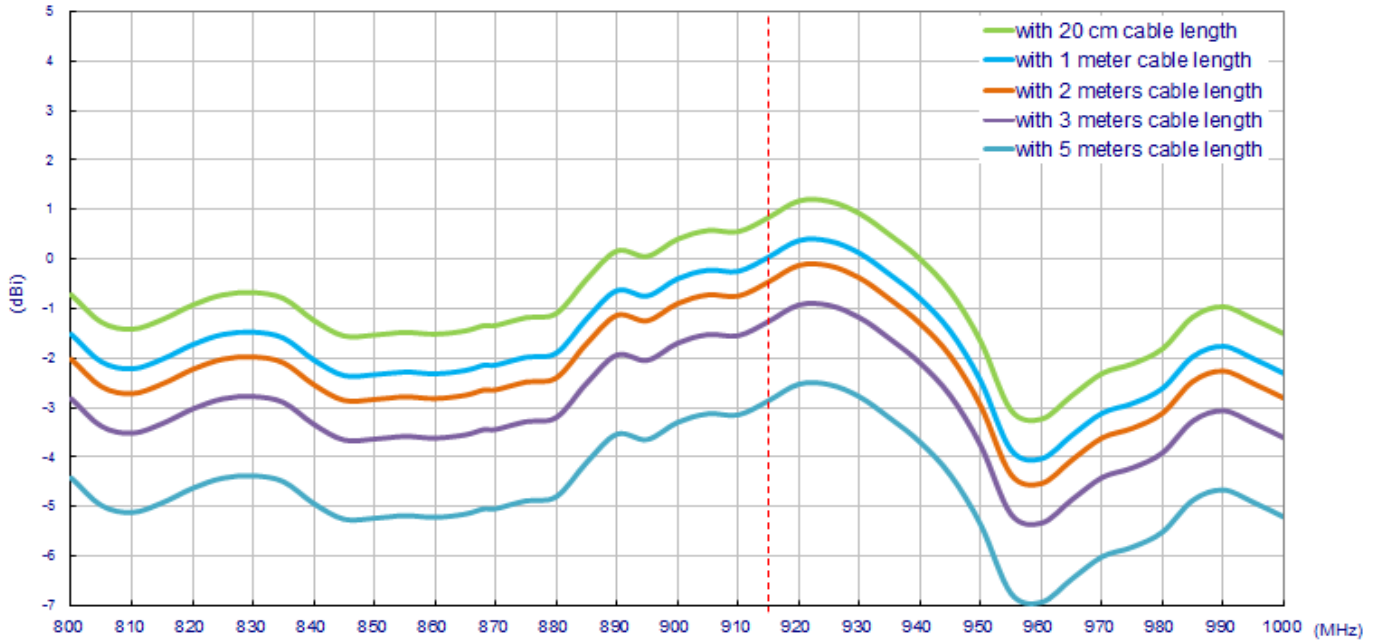


### 4.4.2 On 30x30cm ground plane

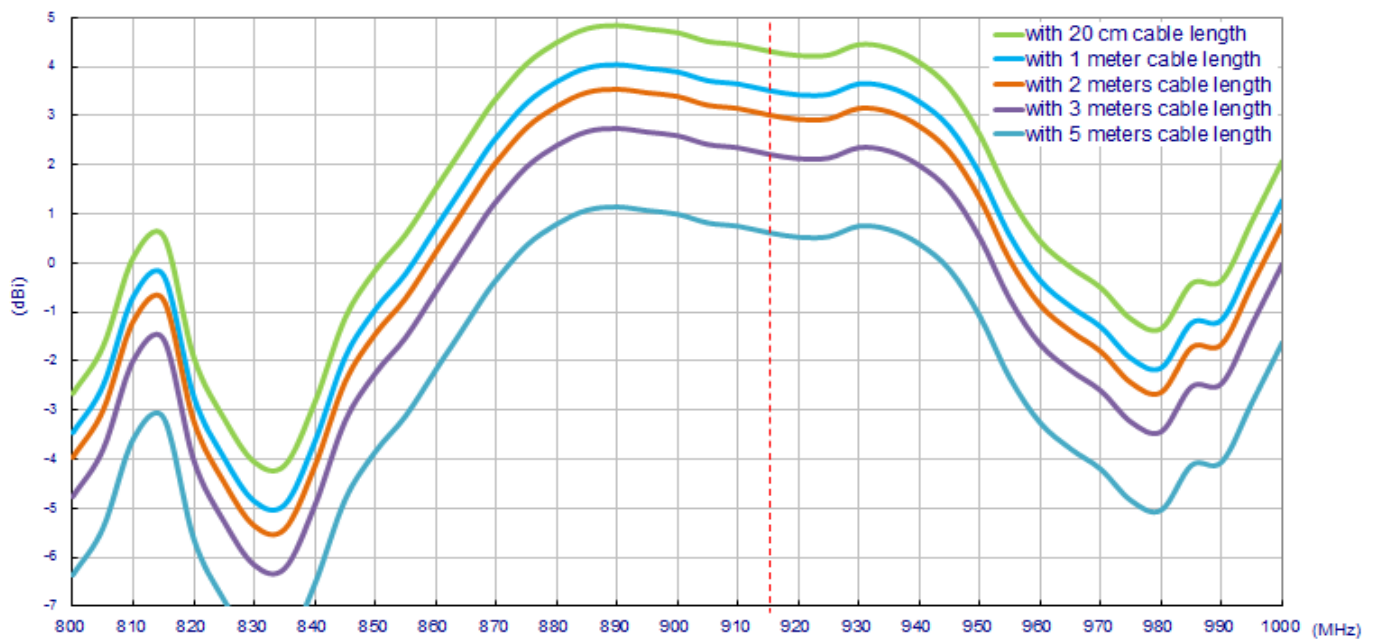


## 4.5 Antenna Radiation Patterns

### 4.5.1 Antenna Setup

The antenna radiation pattern test setup is shown below.

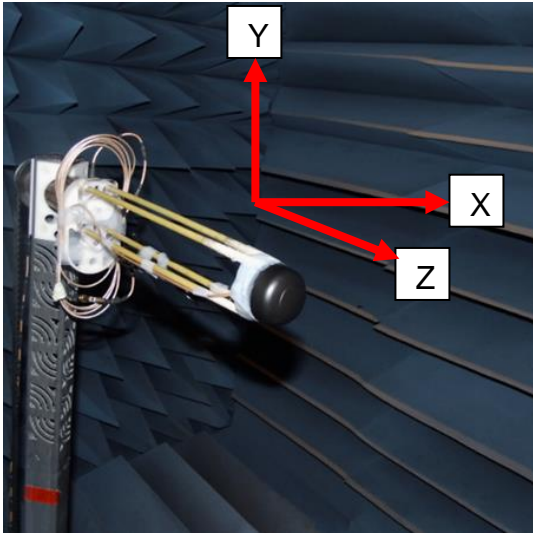


**In free space**

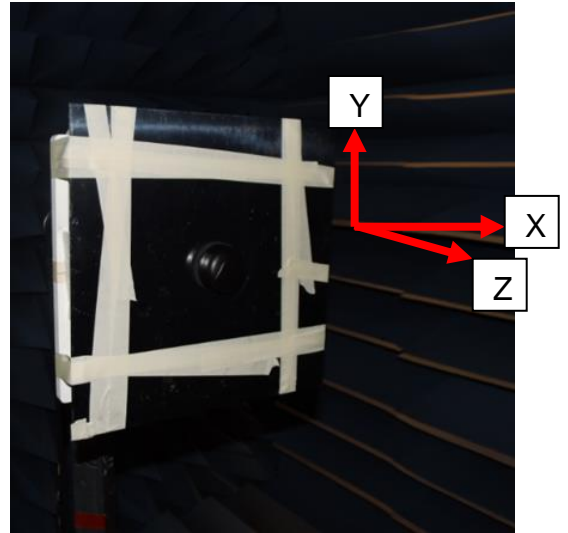


**On 30x30 ground plane**


**4.5.2 Antenna Radiation Patterns**  
**In free space**  
**XY Plane**

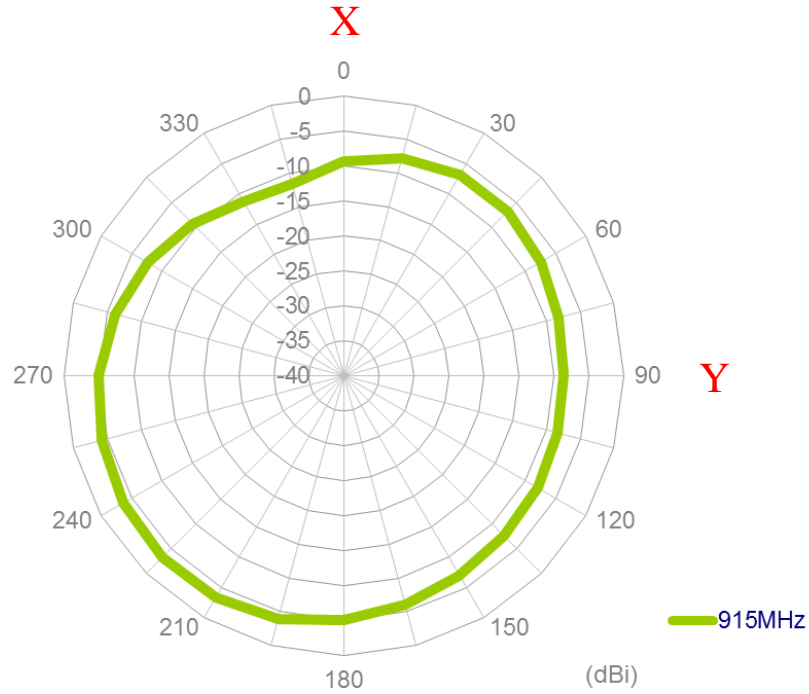


**XZ Plane**

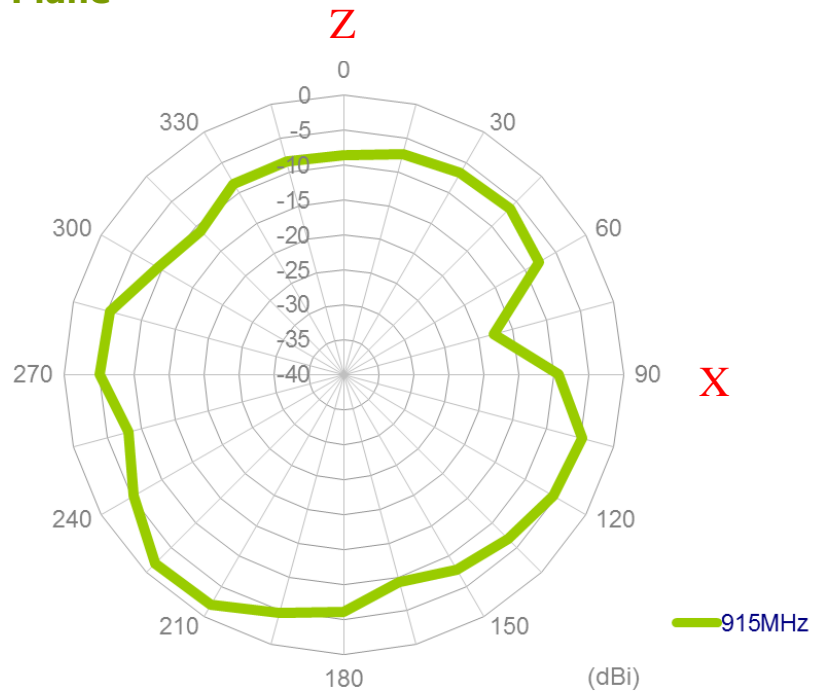


**YZ Plane**

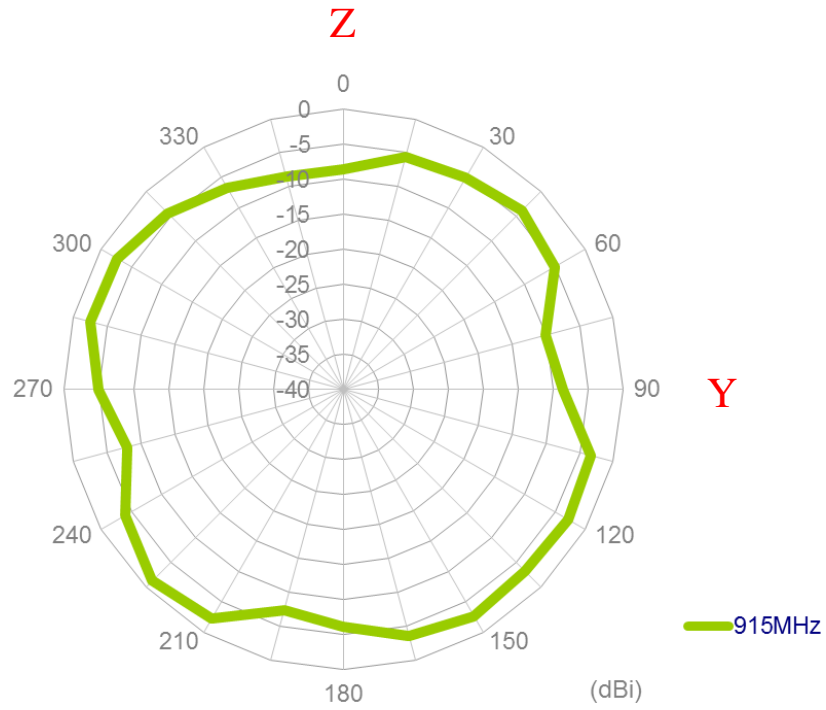


**On the ground plane  
XY Plane**

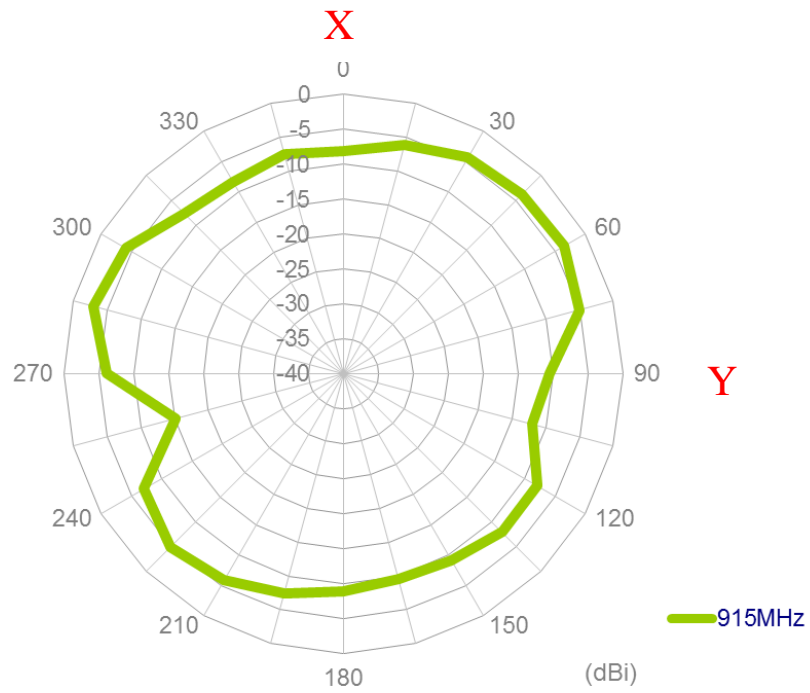

**XZ Plane**

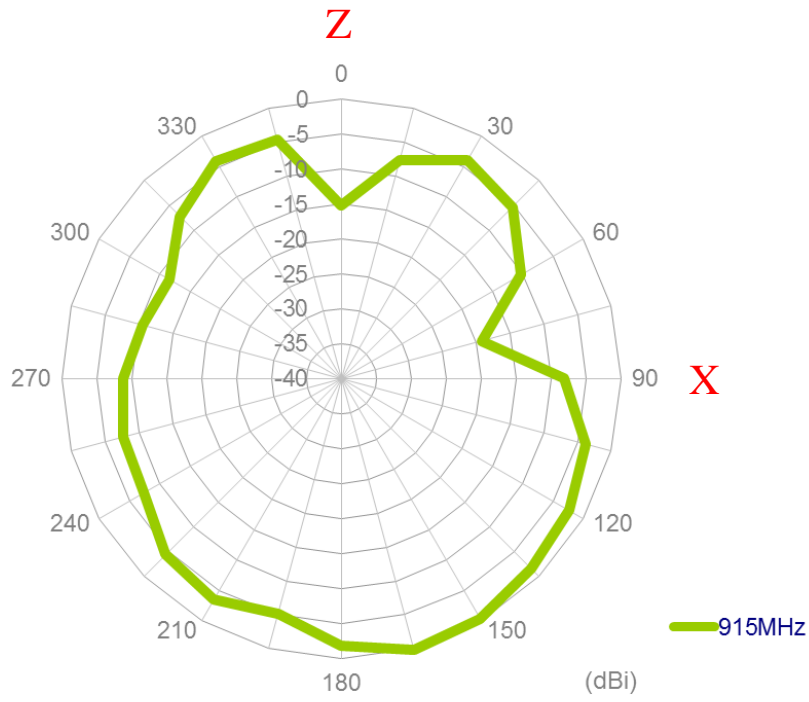


**YZ Plane**

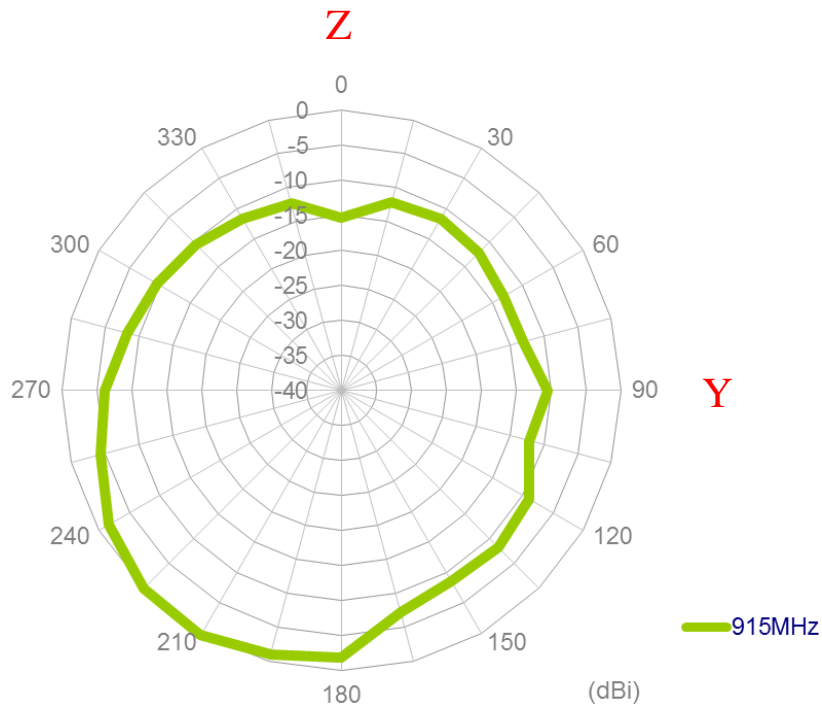


## 5. GPS-GLONASS-GALILEO Antenna

### 5.1 System Block Diagram

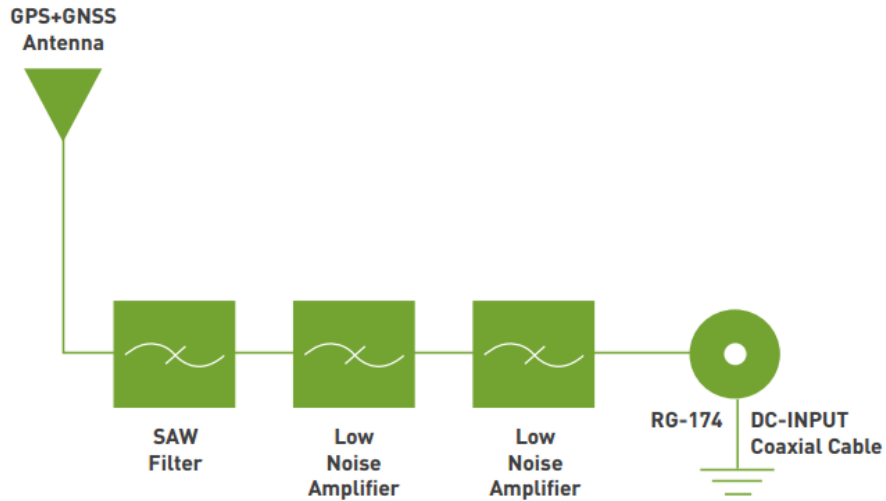

### 5.2 GPS-GLONASS-GALILEO Passive Antenna Result


#### 5.2.1 Return Loss

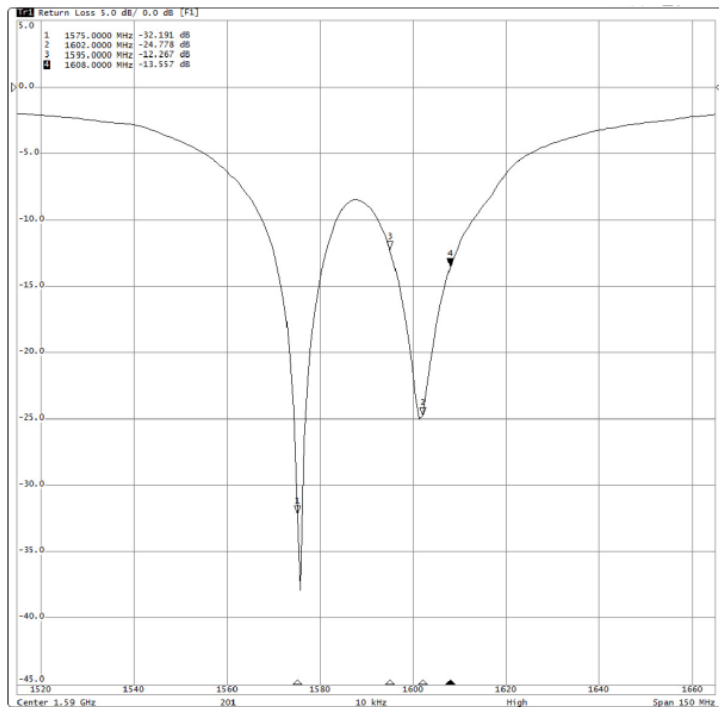


Return Loss : 1575.42 MHz -32.19 dB  
 1602.6 MHz -24.77 dB



## 5.2.2 VSWR

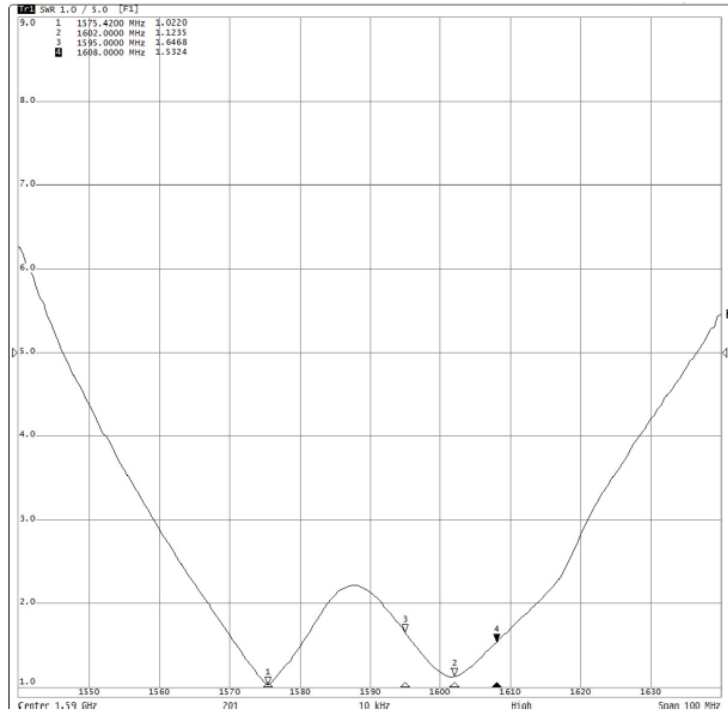

### 5.2.3 Smith Chart

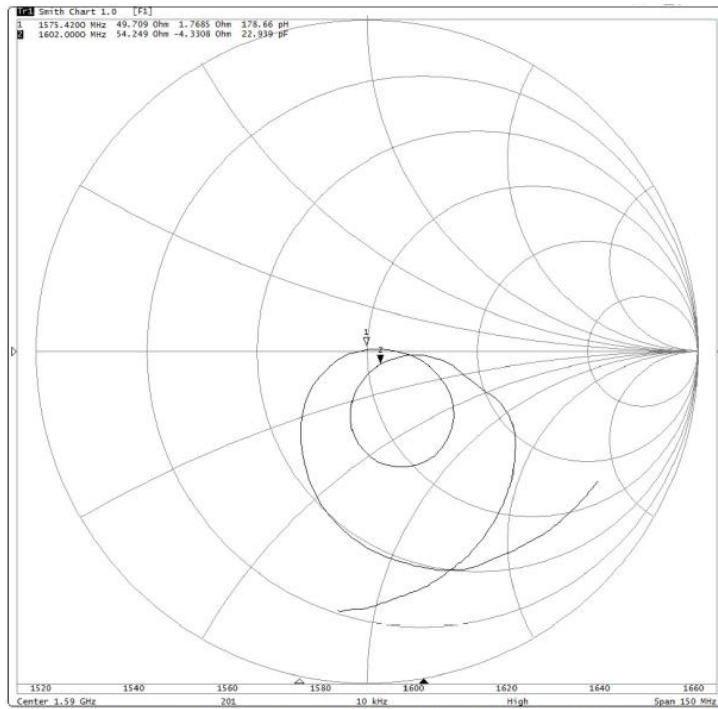


Impedance : 49.70 +j1.76 Ohm

Impedance : 54.24 -j4.33 Ohm




### 5.3 GPS-GLONASS-GALILEO Radiation Patterns


XZ-Plane

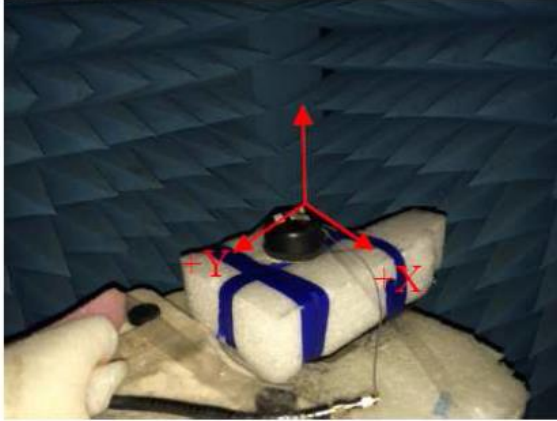

YZ-Plane

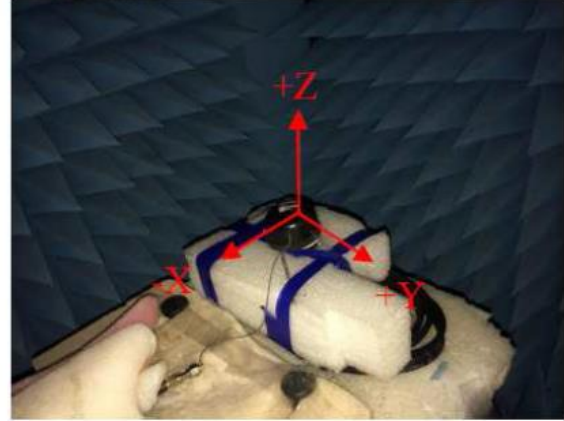


#### 5.3.1.1 1575.42 MHz XZ-Plane

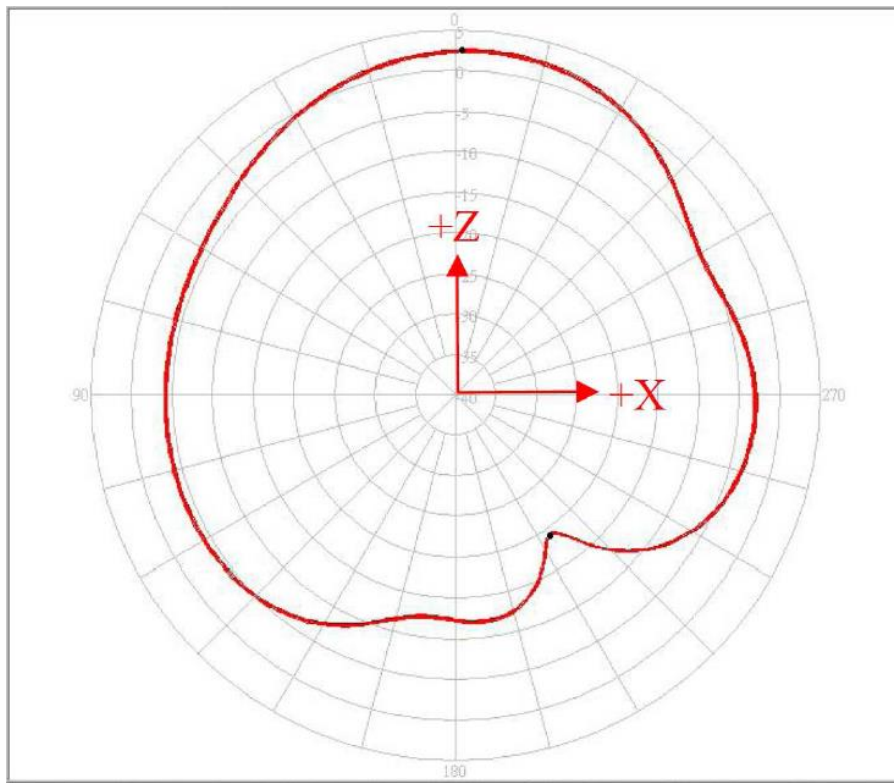


Pattern	Model No.	Test Mode	Freq(MHz)	Max Gain(dBi)	Min Gain(dBi)	Avg. Gain(dBi)	Source Polar.	Date
1	25x25x4.0	XZ	1575.42	2.50 / 359.00	-19.09 / 214.00	-2.81	V+H	2014/4/1


### 5.3.2 1575.42 MHz YZ-Plane

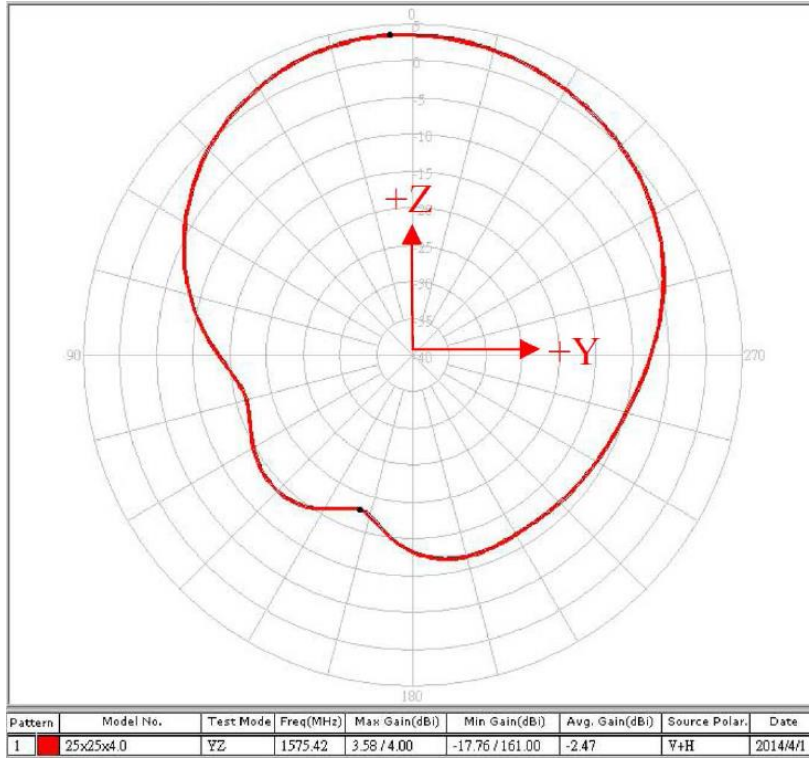

### 5.3.3 1602 MHz XZ-Plane

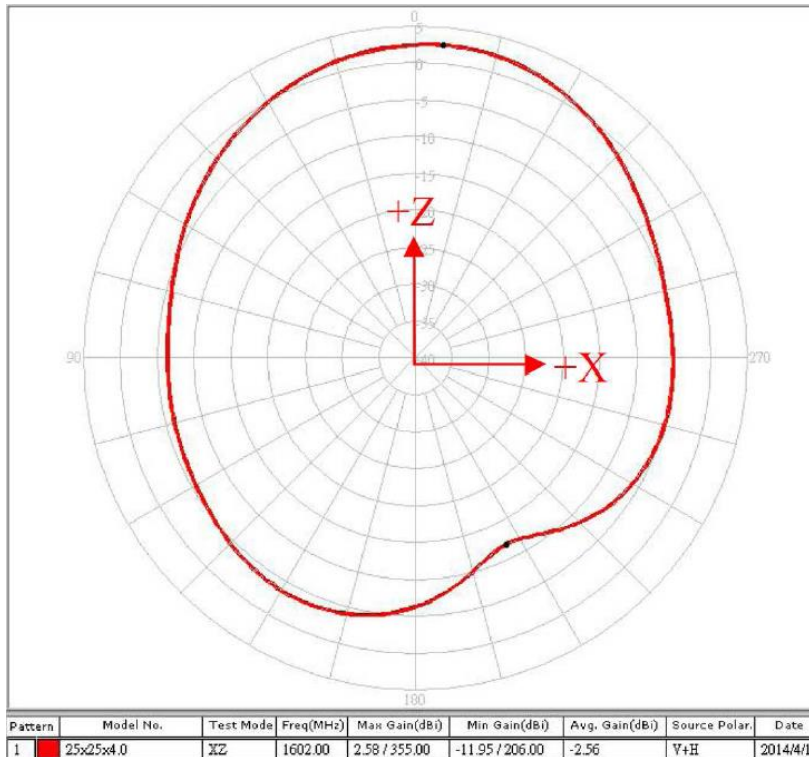


### 5.3.4 1606 MHz YZ-Plane

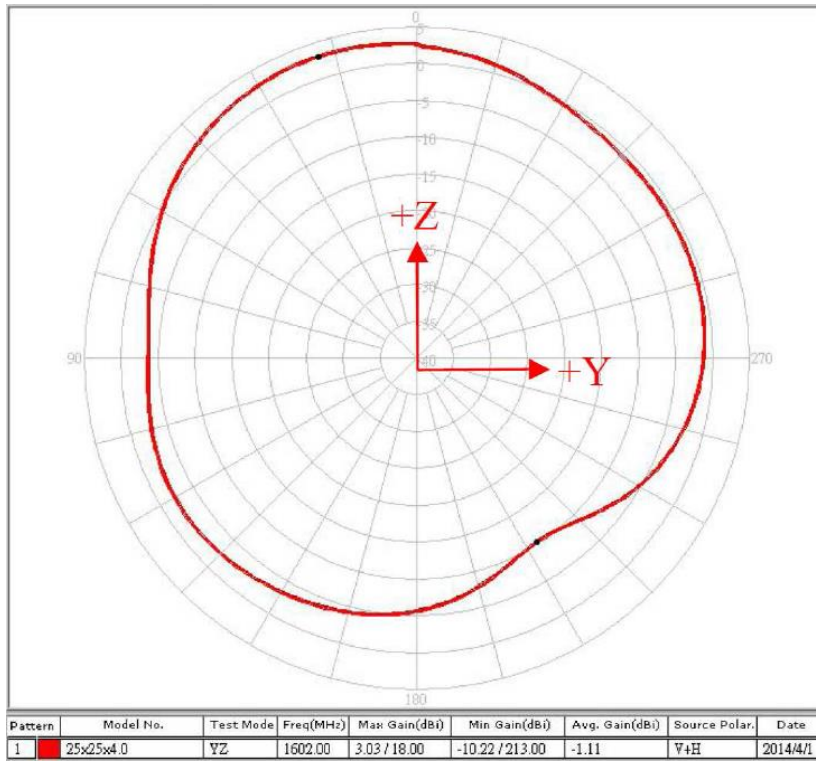


## 5.4 GPS-GLONASS-GALILEO – Low Noise Amplifier

### 5.4.1 S21\_Gain

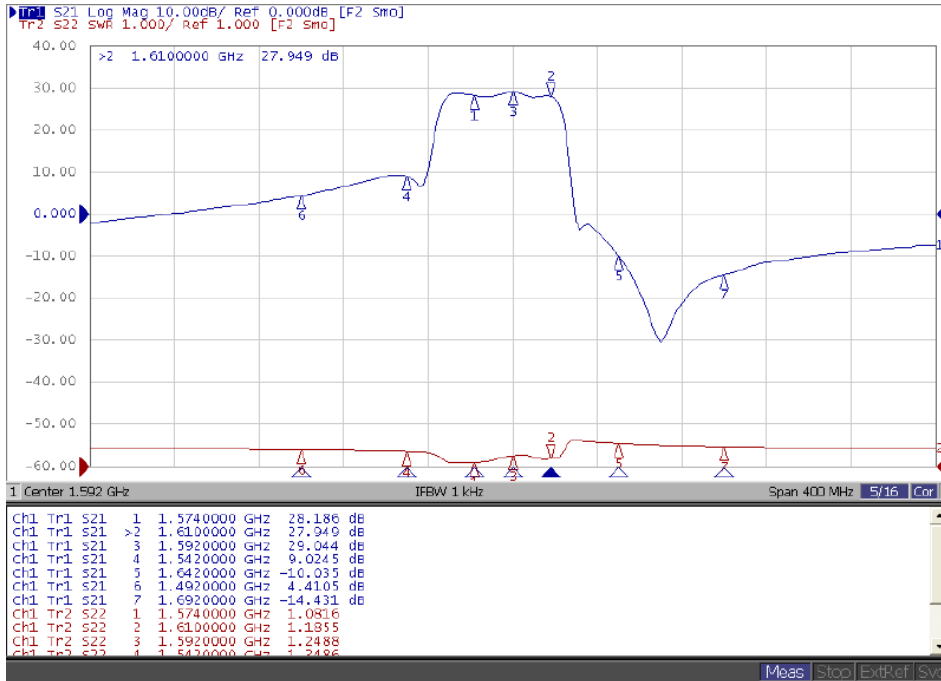


### 5.4.2 Noise Figure

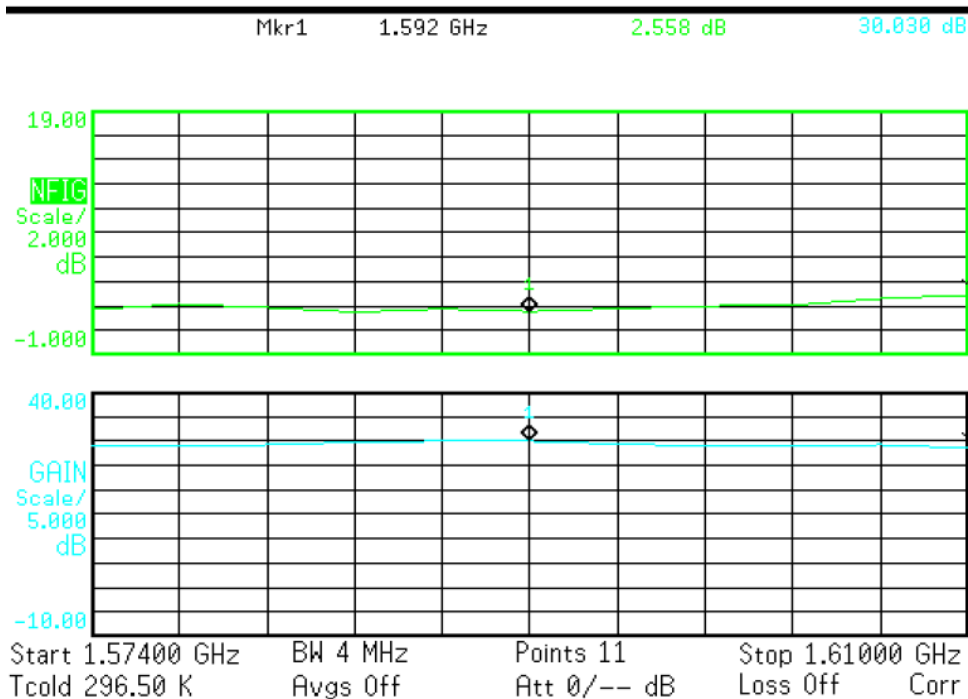




## 6. Drawing

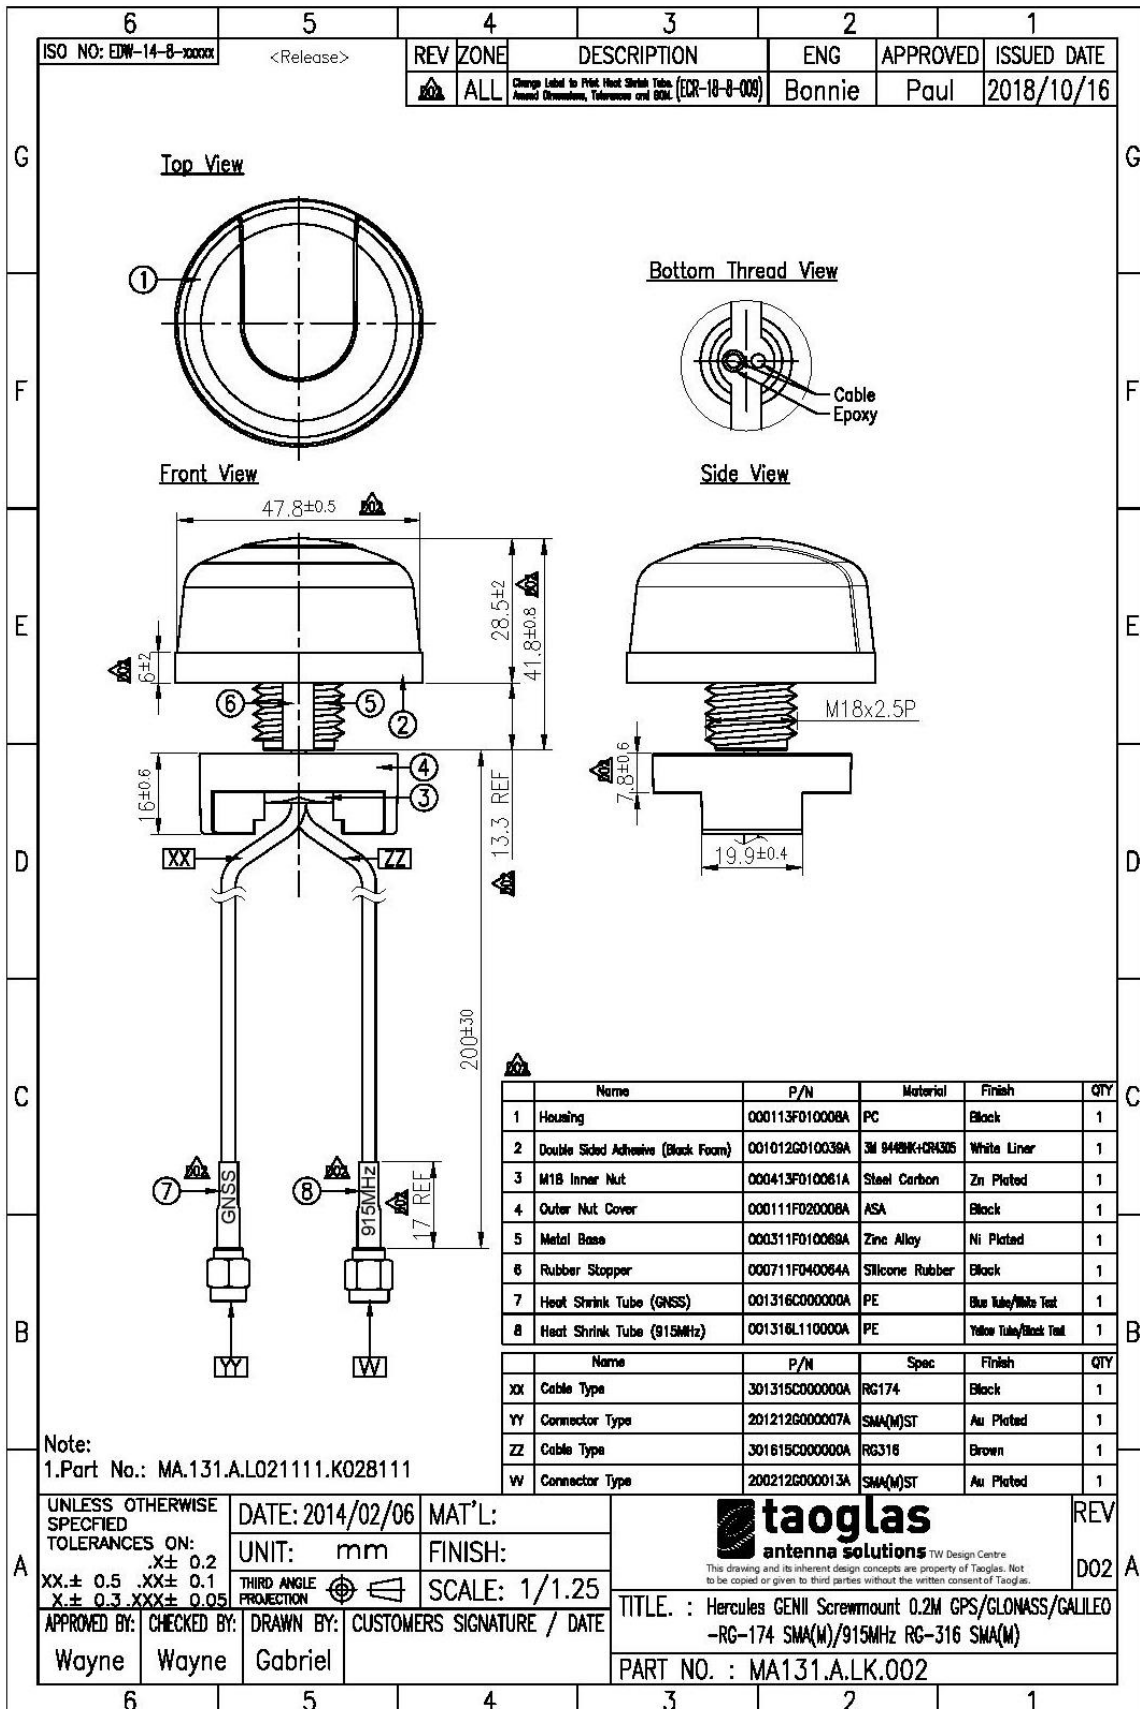


## 7. Installation

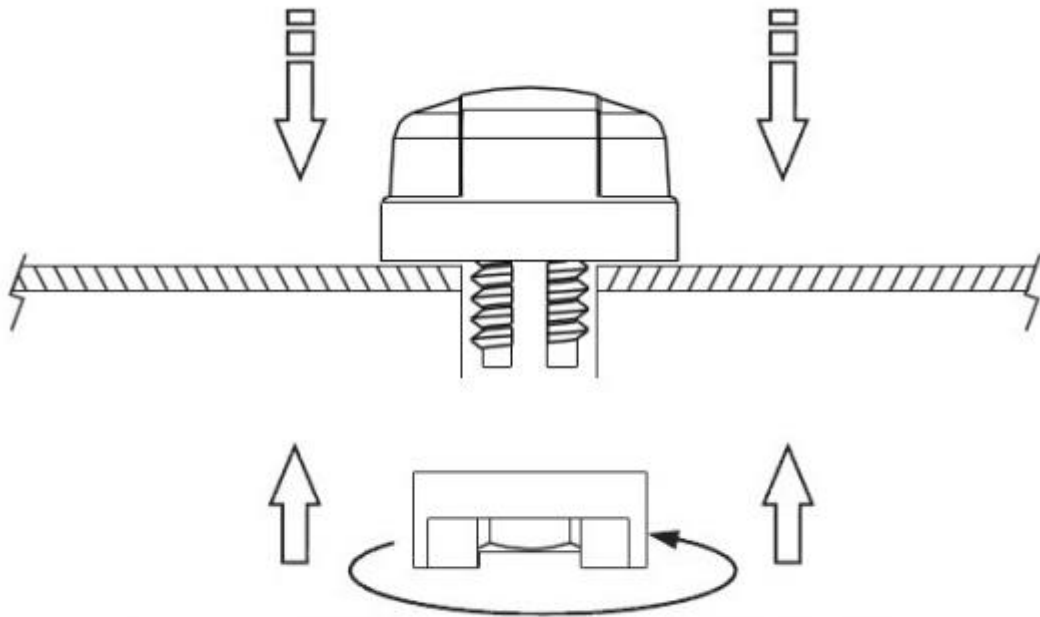

Recommended torque for Mounting is 24.5N·m  
Maximum torque for mounting is 29.4N·m

## 8. Packaging

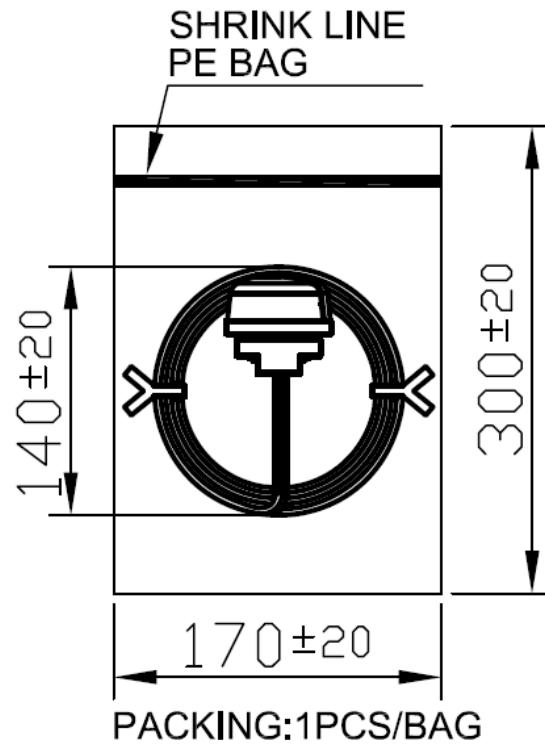

Taoglas makes no warranties based on the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice. Taoglas reserves all rights to this document and the information contained herein.

Reproduction, use or disclosure to third parties without express permission is strictly prohibited.

Copyright © Taoglas Ltd.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.