



SAW Components

Data Sheet B7822

Data Sheet

An abstract graphic featuring the word "EPCOS" in large, glowing, 3D letters. The letters are white with a blue glow and are positioned diagonally across the frame. In the background, there is a faint, stylized globe with circuitry patterns overlaid on it. The overall color scheme is dark with blue and white highlights.



SAW Components

B7822

Low-Loss Filter for Mobile Communication

1842,5 MHz

Data Sheet






Chip sized SAW package

Features

- Low-loss RF filter for mobile telephone PCN systems, receive path
- High selectivity up to 6 GHz
- Low amplitude ripple
- Usable passband 75 MHz
- Suitable for GPRS class 1 to 12
- Package for **Surface Mount Technology (SMT)**

Terminals


- Gold-plated Ni

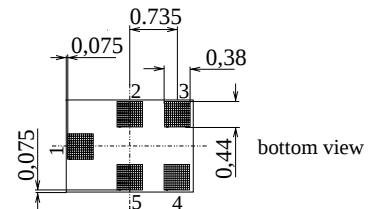

Dimensions in mm, approx. weight 0,007 g

Pin configuration

- | | |
|-----|--------------------|
| 1 | Input, unbalanced |
| 4 | Output, unbalanced |
| 2,5 | Case ground |
| 3 | to be grounded |

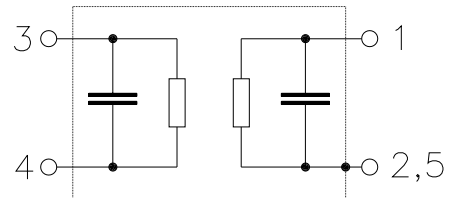

Type	Ordering code	Marking and Package according to	Packing according to
B7822	B39182-B7822-C710	C61157-A7-A111	F61074-V8151-Z000

Electrostatic Sensitive Device (ESD)

Maximum ratings

Operable temperature range	T	- 10 / + 80	°C	peak power of GSM signal duty cycle 4:8
Storage temperature range	T_{stg}	- 40 / + 85	°C	
DC voltage	V_{DC}	3	V	
ESD voltage	V_{ESD}	50	V	
Input power at				
GSM850, GSM900	P_{IN}	15	dBm	
GSM1800, GSM1900	P_{IN}	12	dBm	
Tx bands				



SAW Components	B7822
Low-Loss Filter for Mobile Communication	1842,5 MHz
Data Sheet	SMD

Characteristics

Operating Temperature Range:	$T = +25 \pm 2 \text{ }^{\circ}\text{C}$
Terminating source impedance:	$Z_S = 50\Omega$ (unbalanced)
Terminating load impedance:	$Z_L = 50\Omega$ (unbalanced)

		min.	typ.	max.	
Center frequency	f_C	—	1842,5	—	MHz
Maximum insertion attenuation	$\alpha_{\max}$				
1805,0 ... 1880,0 MHz		—	2,3	2,8	dB
Amplitude ripple (p-p)	$\Delta\alpha$				
1805,0 ... 1880,0 MHz		—	0,8	1,5	dB
Input VSWR					
1805,0 ... 1880,0 MHz		—	2,1	2,3	
Output VSWR					
1805,0 ... 1880,0 MHz		—	2,0	2,2	
Attenuation	α				
0,0 ... 1480,0 MHz		30	34	—	dB
1480,0 ... 1765,0 MHz		22	27	—	dB
1765,0 ... 1785,0 MHz		14	16	—	dB
1920,0 ... 1980,0 MHz		18	23	—	dB
1980,0 ... 2400,0 MHz		25	28	—	dB
2400,0 ... 2500,0 MHz		30	37	—	dB
2500,0 ... 3610,0 MHz		25	32	—	dB
3610,0 ... 3760,0 MHz		35	44	—	dB
3760,0 ... 6000,0 MHz		25	39	—	dB



SAW Components

B7822

Low-Loss Filter for Mobile Communication

1842,5 MHz

Data Sheet



Characteristics

Operating Temperature Range: $T = -10$ to $+80^{\circ}\text{C}$
Terminating source impedance: $Z_S = 50\Omega$ (unbalanced)
Terminating load impedance: $Z_L = 50\Omega$ (unbalanced)

		min.	typ.	max.	
Center frequency	f_C	—	1842,5	—	MHz
Maximum insertion attenuation	$\alpha_{\max}$				
1805,0 ... 1880,0 MHz		—	2,4	3,1	dB
Amplitude ripple (p-p)	$\Delta\alpha$				
1805,0 ... 1880,0 MHz		—	0,9	1,8	dB
Input VSWR					
1805,0 ... 1880,0 MHz		—	2,1	2,3	
Output VSWR					
1805,0 ... 1880,0 MHz		—	2,0	2,2	
Attenuation	α				
0,0 ... 1480,0 MHz		30	34	—	dB
1480,0 ... 1765,0 MHz		21	25	—	dB
1765,0 ... 1785,0 MHz		11	14	—	dB
1920,0 ... 1980,0 MHz		18	23	—	dB
1980,0 ... 2400,0 MHz		24	27	—	dB
2400,0 ... 2500,0 MHz		30	37	—	dB
2500,0 ... 3610,0 MHz		25	32	—	dB
3610,0 ... 3760,0 MHz		35	44	—	dB
3760,0 ... 6000,0 MHz		25	39	—	dB



SAW Components

B7822

Low-Loss Filter for Mobile Communication

1842,5 MHz

Data Sheet



Characteristics

Operating Temperature Range: $T = -20$ to $+85^{\circ}\text{C}$
Terminating source impedance: $Z_S = 50\Omega$ (unbalanced)
Terminating load impedance: $Z_L = 50\Omega$ (unbalanced)

		min.	typ.	max.	
Center frequency	f_C	—	1842,5	—	MHz
Maximum insertion attenuation	$\alpha_{\max}$				
1805,0 ... 1880,0 MHz		—	2,7	3,4	dB
Amplitude ripple (p-p)	$\Delta\alpha$				
1805,0 ... 1880,0 MHz		—	1,2	2,1	dB
Input VSWR					
1805,0 ... 1880,0 MHz		—	2,1	2,3	
Output VSWR					
1805,0 ... 1880,0 MHz		—	2,1	2,4	
Attenuation	α				
0,0 ... 1480,0 MHz		30	34	—	dB
1480,0 ... 1765,0 MHz		21	25	—	dB
1765,0 ... 1785,0 MHz		10	13	—	dB
1920,0 ... 1980,0 MHz		18	23	—	dB
1980,0 ... 2400,0 MHz		24	27	—	dB
2400,0 ... 2500,0 MHz		30	37	—	dB
2500,0 ... 3610,0 MHz		25	32	—	dB
3610,0 ... 3760,0 MHz		35	44	—	dB
3760,0 ... 6000,0 MHz		25	39	—	dB



SAW Components

B7822


Low-Loss Filter for Mobile Communication

1842,5 MHz


Data Sheet



Transfer function (spec for 25°C)

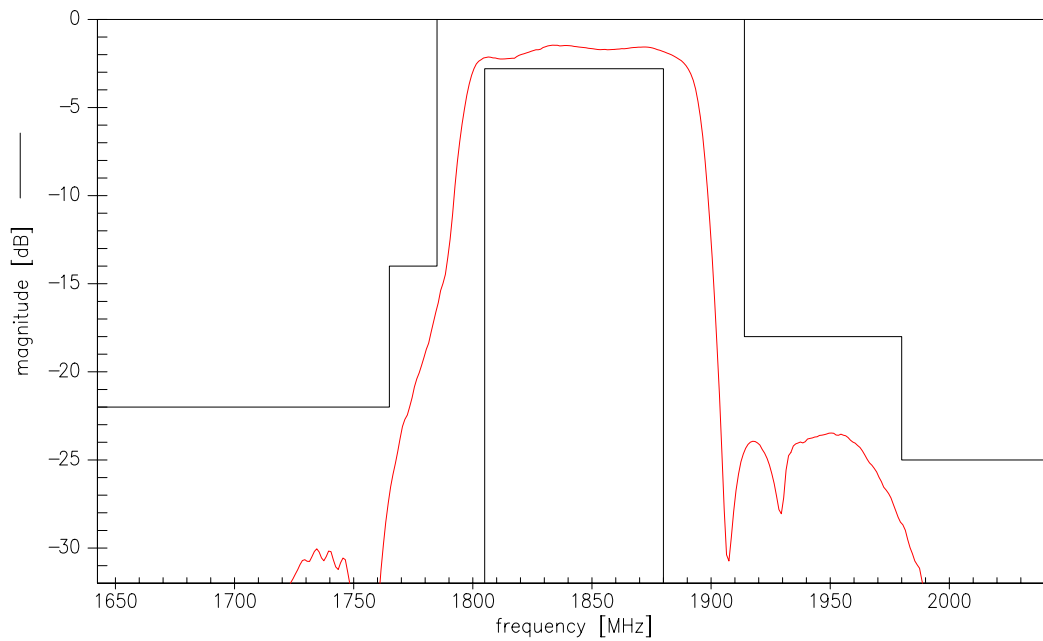

Transfer function (wideband)

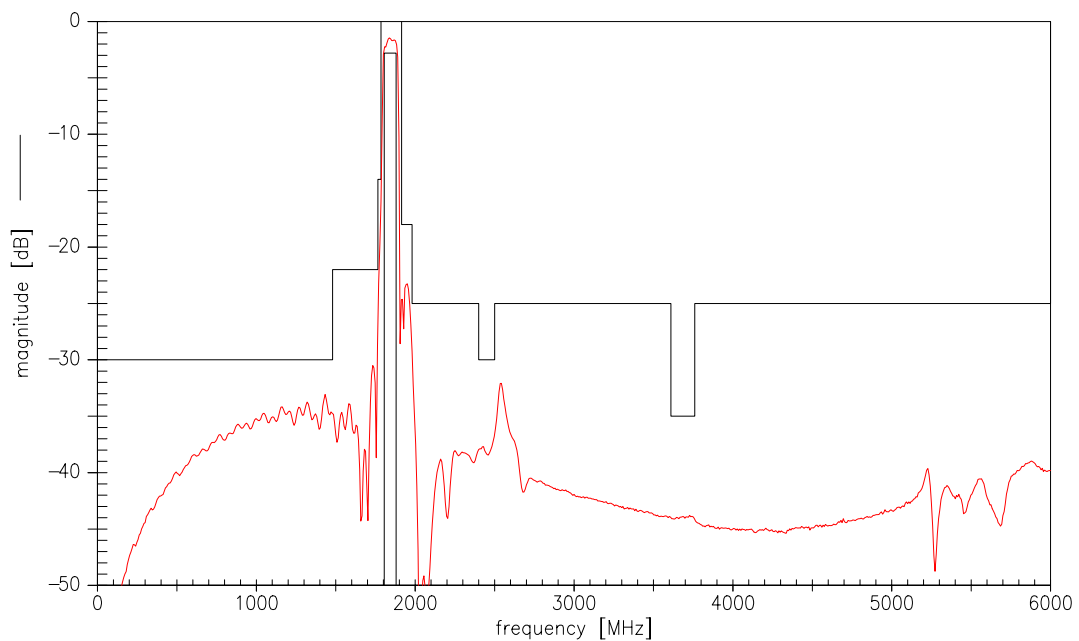



SAW Components	B7822
Low-Loss Filter for Mobile Communication	1842,5 MHz
Data Sheet	SMD

Published by EPCOS AG

Surface Acoustic Wave Components Division, SAW MC WT

P.O. Box 80 17 09, D-81617 München

© EPCOS AG 2003. All Rights Reserved. Reproduction, publication and dissemination of this brochure and the information contained therein without EPCOS' prior express consent is prohibited.

The information contained in this brochure describes the type of component and shall not be considered as guaranteed characteristics. Purchase orders are subject to the General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry recommended by the ZVEI (German Electrical and Electronic Manufacturers' Association), unless otherwise agreed.

This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.