

# 15203B /25203B /35203B Accelerometer

## Digital Accelerometers User Configurable $\pm 1$ to $\pm 15$ g

### Digital Accelerometer

These Measurement Specialties digital accelerometers are complete, easy-to-use, user-configurable sensors containing one to three accelerometers, a temperature sensor, signal processor, RS-485 interface and three analog outputs in a small, easy-to-install package.


No data acquisition system is required; data is streamed directly to a PC. A connection kit is available to set up and begin testing immediately upon receipt of the sensor.

The analog/digital output range and low-pass filter of each digital accelerometer axis can be set via a built-in RS-485 interface using a free, downloadable Instrument Configuration Utility (ICU). An RS-485 to RS-232 adapter is available.

Calibrated, ranged and filtered data can be streamed out at up to 3 Mbit/ sec via RS-485. Analog output of up to three calibrated, ranged and filtered channels are provided for compatibility with existing systems.



## dimensions

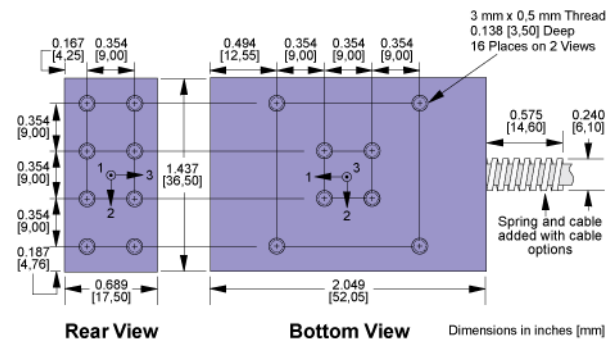

Two through holes and four 3 mm x 0.5 mm threaded holes are provided for mounting.


## FEATURES

- User Configurable Settings
- RS485 Serial and Analog Outputs
- High Accuracy and Linearity over Wide Temperature Range
- Built-in Calibration Data
- Built-in Power Supply Regulation
- Easy Installation
- Suitable for Harsh Environments
- DO-160 Version Available
- Three Year Warranty


## APPLICATIONS

- Vehicle dynamics
- Construction Equipment
- Research & Development
- Test & Measurement
- Military/Aerospace

Mounting  
adapters  
(sold  
separately)



35170A Horizontal



35172A Vertical

## connections



| Pin    | 1        | 2        | 3        | 4       | 5      | 6      | 7      | 8    | 9     |
|--------|----------|----------|----------|---------|--------|--------|--------|------|-------|
| Signal | Analog1+ | Analog2+ | Analog3+ | Signal- | RS485- | RS485+ | Aux    | +Vs  | Gnd   |
| Wire   | Brown    | Red      | Orange   | Yellow  | Green  | Blue   | Violet | Grey | White |

The information in this sheet has been carefully reviewed and is believed to be accurate; however, no responsibility is assumed for inaccuracies. Furthermore, this information does not convey to the purchaser of such devices any license under the patent rights to the manufacturer. Measurement Specialties, Inc. reserves the right to make changes without further notice to any product herein. Measurement Specialties, Inc. makes no warranty, representation or guarantee regarding the suitability of its product for any particular purpose, nor does Measurement Specialties, Inc. assume any liability arising out of the application or use of any product or circuit and specifically disclaims any and all liability, including without limitation consequential or incidental damages. Typical parameters can and do vary in different applications. All operating parameters must be validated for each customer application by customer's technical expert. Measurement Specialties, Inc. does not convey any license under its patent rights nor the rights of others.

# 15203B/25203B /35203B Accelerometer

## performance specifications


$T_A = T_{min}$  to  $T_{max}$  ; Acceleration = 0 g unless otherwise noted; within one year of calibration. Improved specifications available upon request.

| PARAMETERS                                              | Min   | Typical | Max    | Units   | Conditions/Notes                                  |
|---------------------------------------------------------|-------|---------|--------|---------|---------------------------------------------------|
| <b>Range:</b> Measurement Full Scale                    |       |         |        |         | On each axis, user configurable                   |
| Option R015                                             |       |         | ±15    | g       |                                                   |
| Option R006                                             |       |         | ±6     | g       |                                                   |
| <b>Sensitivity Drift</b> 25°C to $T_{min}$ or $T_{max}$ |       | ±0.65   |        | %       | Percent of sensitivity at 25 °C                   |
| <b>Zero g Drift</b> 25°C to $T_{min}$ or $T_{max}$      |       | ±60     |        | mg      | Repeatable, can be compensated                    |
| <b>Alignment</b>                                        |       | ±1.0    | ±3.0   | degrees | Deviation from ideal axes                         |
| <b>Transverse Sensitivity</b>                           |       | ±0.25   |        | %       | Inherent sensor error, excluding misalignment     |
| <b>Nonlinearity</b>                                     |       | 0.1     |        | % FSR   | Best fit straight line                            |
| <b>Frequency Response</b>                               | 0     |         | 800    | Hz      | Lower filter cutoffs are user configurable*       |
| <b>Noise Density</b>                                    |       | 120     |        | µg/√Hz  | $T_A = 25$ °C                                     |
| <b>Temperature Sensor</b>                               |       |         |        |         |                                                   |
| Range                                                   | -55   |         | 125    | °C      |                                                   |
| Resolution                                              |       | 0.25    |        | °C      |                                                   |
| Accuracy                                                |       | ±2.0    | ±3.5   | °C      | $T_A = -40$ to $+85$ °C                           |
| <b>Digital Signal Processor</b>                         |       |         |        |         |                                                   |
| Internal Word Size                                      |       |         | 32     | bits    |                                                   |
| Sensor Scan Rate                                        |       | 15,000  | 42,500 | Hz      | User configurable; channels processed in parallel |
| <b>Analog Outputs**</b>                                 |       |         |        |         | Configurable to sensor                            |
| Voltage Swing                                           | 0.25  |         | 4.75   | V       | $I_{out} = 5$ mA                                  |
| Impedance to Analog -                                   | 100   | 130     | 220    | Ω       |                                                   |
| Nonlinearity                                            |       |         | 0.15   | % FSR   | Excluding sensor nonlinearity                     |
| <b>Digital Output Word Size</b>                         |       |         | 16     | bits    | Filtered, gained and calibration corrected        |
| <b>Power Supply (<math>V_s</math>)</b>                  |       |         |        |         |                                                   |
| Input Voltage Limits                                    | -80   |         | +80    | V       | -80 V continuous, >38 V if ≤550 ms, duty <1%      |
| Input Voltage – Operating                               | +8.5  |         | +36    | V       | Continuous                                        |
| Input Current                                           |       | 50      |        | mA      |                                                   |
| Rejection Ratio                                         | 80    | 120     |        | dB      | DC                                                |
| <b>Temperature Range (<math>T_A</math>)</b>             | -40   |         | +85    | °C      | Terminal block option T000 rated to -30 °C        |
| <b>Mass</b>                                             |       | 78      |        | grams   |                                                   |
| <b>Shock Survival – Sensor</b>                          | -1500 |         | +1500  | g       | Any axis for 0.5 ms, limited by oscillator        |

\*User configurable low-pass filter 3dB cutoff (number poles configurable)

\*\*Each channel's offset and gain are configurable

## ordering info

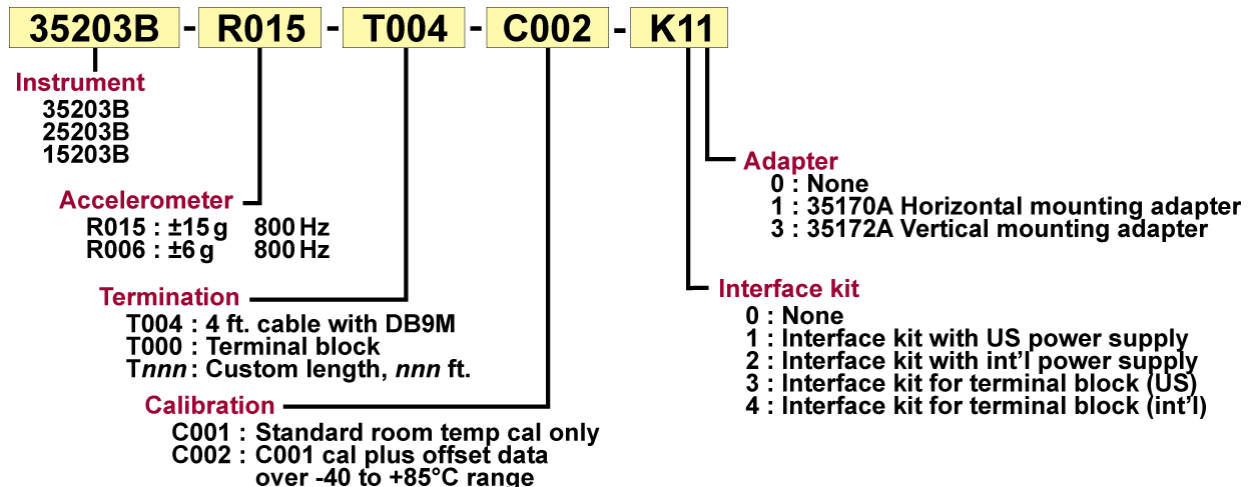



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.