

**S2D13515 Display Controller**

**Interfacing the Sharp  
LQ043xxx 480x272 TFT  
Panel**

## NOTICE

---

No part of this material may be reproduced or duplicated in any form or by any means without the written permission of Seiko Epson. Seiko Epson reserves the right to make changes to this material without notice. Seiko Epson does not assume any liability of any kind arising out of any inaccuracies contained in this material or due to its application or use in any product or circuit and, further, there is no representation that this material is applicable to products requiring high level reliability, such as, medical products. Moreover, no license to any intellectual property rights is granted by implication or otherwise, and there is no representation or warranty that anything made in accordance with this material will be free from any patent or copyright infringement of a third party. This material or portions thereof may contain technology or the subject relating to strategic products under the control of the Foreign Exchange and Foreign Trade Law of Japan and may require an export license from the Ministry of International Trade and Industry or other approval from another government agency.

All other product names mentioned herein are trademarks and/or registered trademarks of their respective companies.

©SEIKO EPSON CORPORATION 2008, All rights reserved.

---

# Table Of Contents

- Chapter 1 Interfacing the Sharp LQ043xxx 480x272 TFT Panel . . . . . 5**
  - 1.1 Overview . . . . . 5
  - 1.1.1 Electrical Interface . . . . . 6
  - 1.1.2 S2D13515 Register Settings for Sharp LQ043xxx, 480x272 TFT Panel . . . . . 7
- Chapter 2 Change Record . . . . . 8**



# Chapter 1 Interfacing the Sharp LQ043xxx 480x272 TFT Panel

This document describes the hardware and software environment required to interface the S2D13515 Display Controller and Sharp LQ043xxx 480x272 TFT Panel.

The designs described in this document are presented only as examples of how such interfaces might be implemented.

In the following example, the Sharp LQ043xxx panel is connected to FP2IO LCD interface of S2D13515.

## 1.1 Overview

The S2D13515 directly supports the Sharp LQ043xxx and requires no additional hardware and minimal programming. The S2D13515 register settings and electrical interface is described in the following sections.

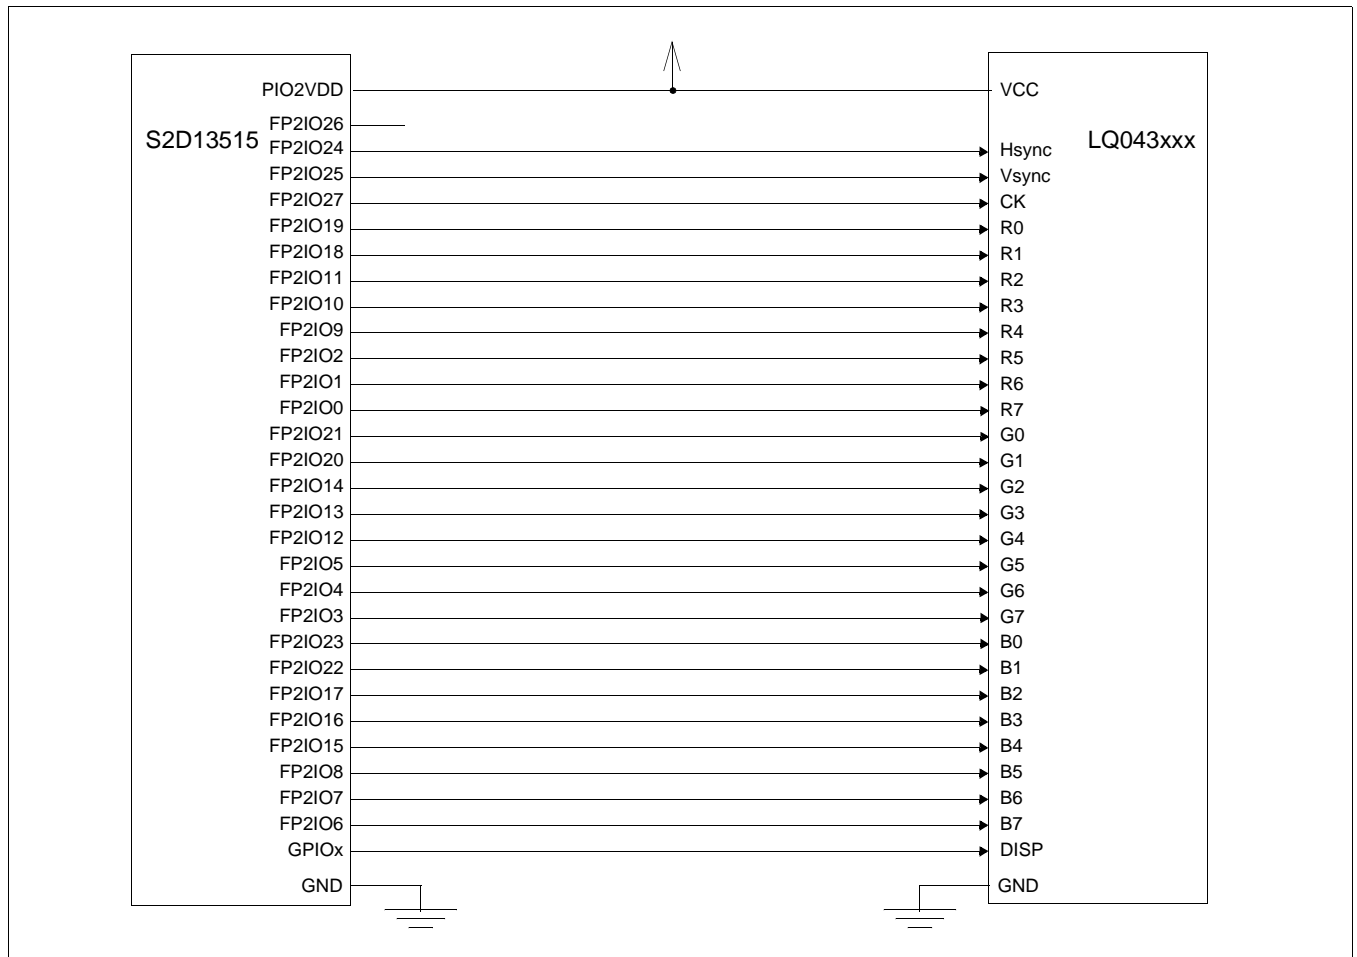


Figure 1-1: S2D13515 to Sharp LQ043xxx Connection Diagram

## 1.1.1 Electrical Interface

*Table 1-1: Pin Mapping*

<b>S2D13515 Pin Name</b>	<b>LQ043xxx Pin Name</b>
FP2IO24	Hsync
FP2IO25	Vsync
FP2IO27	CK
FP2IO26	-
FP2IO19	R0
FP2IO18	R1
FP2IO11	R2
FP2IO10	R3
FP2IO9	R4
FP2IO2	R5
FP2IO1	R6
FP2IO0	R7
FP2IO21	G0
FP2IO20	G1
FP2IO14	G2
FP2IO13	G3
FP2IO12	G4
FP2IO5	G5
FP2IO4	G6
FP2IO3	G7
FP2IO23	B0
FP2IO22	B1
FP2IO17	B2
FP2IO16	B3
FP2IO15	B4
FP2IO8	B5
FP2IO7	B6
FP2IO6	B7
GPIOx (any GPIO pin)	DISP

The same power must be connected to PIO2VDD pins of S2D13515 and to VCC pins of Sharp LQ043xxx panel.

Display ON/OFF signal is provided by one of S2D13515 GPIO pins and it is under application software control. The LCD2 VNDP Status bit can be used to comply with the Sharp LQ043xxx requirement that DISP signal does not change while Vsync is low.

### 1.1.2 S2D13515 Register Settings for Sharp LQ043xxx, 480x272 TFT Panel

The registers listed below are only those associated with panel specific timing issues. All other registers are not shown here.

*Table 1-2: Example Register Settings for Sharp LQ043xxx 480x272 TFT Panel*

Register	Value	Comment
REG[0031h]	31h	set LCD2PCLK divide, LCD2PCLK = 8MHz assuming LCDCLK=80MHz
REG[4000h]	0Xh	LCD2 RGB8:8:8), generic RGB
REG[4001h]	BXh	Display data is latched on falling edge of PCLK, 24-bit panel
REG[4020h]	0Ch	Hsync period = 525 pixels
REG[4021h]	02h	
REG[4022h]	EFh	horizontal display period = 480 pixels
REG[4023h]	00	
REG[4024h]	2Ah	horizontal display period start position = 43 pixels
REG[4025h]	00h	
REG[4026h]	28h	Hsync width = 41 pixels, active low pulse
REG[4027h]	00h	
REG[4028h]	00h	Hsync start position = 0 pixels
REG[4029h]	00h	
REG[402Ah]	1Dh	Vsync period = 286 lines
REG[402Bh]	01h	
REG[402Ch]	0Fh	vertical display period = 272 lines
REG[402Dh]	01h	
REG[402Eh]	0Ch	vertical display period start position = 12 lines
REG[402Fh]	00h	
REG[4030h]	09h	Vsync width = 10 lines
REG[4031h]	00h	Vsync active low
REG[4032h]	00h	Vsync start position = 0 lines
REG[4033h]	00h	
REG[4070h]	01h	enable LCD2 output

The above values are intended as examples. This example assumes that CLKI = 20MHz and that the PLL2 is used to generate LCDCLK. Actual settings can vary and still remain within the LCD panel timing requirements.

## Chapter 2 Change Record

**X83A-A-001-00 Revision 1.0 - Issued: June 11, 2008**

- all changes from the last revision are highlighted in Red
- initial release



### AMERICA

---

**EPSON ELECTRONICS AMERICA, INC.****HEADQUARTERS**

2580 Orchard Parkway  
San Jose, CA 95131, USA  
Phone: +1-800-228-3964      FAX: +1-408-922-0238

**SALES OFFICES****Northeast**

301 Edgewater Place, Suite 210  
Wakefield, MA 01880, U.S.A.  
Phone: +1-800-922-7667      FAX: +1-781-246-5443

### EUROPE

---

**EPSON EUROPE ELECTRONICS GmbH****HEADQUARTERS**

Riesstrasse 15  
80992 Munich, GERMANY  
Phone: +49-89-14005-0      FAX: +49-89-14005-110

### ASIA

---

**EPSON (CHINA) CO., LTD.**

23F, Beijing Silver Tower 2# North RD DongSanHuan  
ChaoYang District, Beijing, CHINA  
Phone: +86-10-6410-6655      FAX: +86-10-6410-7320

**SHANGHAI BRANCH**

7F, High-Tech Bldg., 900, Yishan Road,  
Shanghai 200233, CHINA  
Phone: +86-21-5423-5522      FAX: +86-21-5423-5512

**EPSON HONG KONG LTD.**

20/F., Harbour Centre, 25 Harbour Road  
Wanchai, Hong Kong  
Phone: +852-2585-4600      FAX: +852-2827-4346  
Telex: 65542 EPSCO HX

**EPSON Electronic Technology Development (Shenzhen) LTD.**

12/F, Dawning Mansion, Keji South 12th Road,  
Hi-Tech Park, Shenzhen  
Phone: +86-755-2699-3828      FAX: +86-755-2699-3838

**EPSON TAIWAN TECHNOLOGY & TRADING LTD.**

14F, No. 7, Song Ren Road,  
Taipei 110  
Phone: +886-2-8786-6688      FAX: +886-2-8786-6660

**EPSON SINGAPORE PTE., LTD.**

1 HarbourFront Place,  
#03-02 HarbourFront Tower One, Singapore 098633  
Phone: +65-6586-5500      FAX: +65-6271-3182

**SEIKO EPSON CORPORATION****KOREA OFFICE**

50F, KLI 63 Bldg., 60 Yoido-dong  
Youngdeungpo-Ku, Seoul, 150-763, KOREA  
Phone: +82-2-784-6027      FAX: +82-2-767-3677

**GUMI OFFICE**

2F, Grand B/D, 457-4 Songjeong-dong,  
Gumi-City, KOREA  
Phone: +82-54-454-6027      FAX: +82-54-454-6093

---

**SEIKO EPSON CORPORATION****SEMICONDUCTOR OPERATIONS DIVISION****IC Sales Dept.****IC International Sales Group**

421-8, Hino, Hino-shi, Tokyo 191-8501, JAPAN  
Phone: +81-42-587-5814      FAX: +81-42-587-5117



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.