



U12 4 POLE
MALE



VIEW FROM THE FRONT SIDE

Pin	Wire color	
1	BROWN	BN
2	WHITE	WH
3	BLUE	BU
4	BLACK	BK


U12 5 POLE
MALE

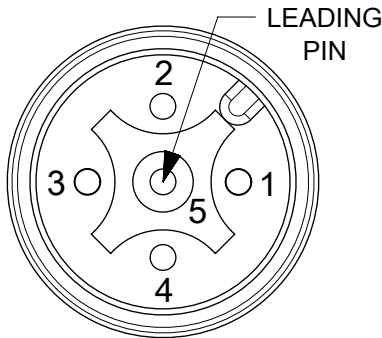

VIEW FROM THE FRONT SIDE

Pin	Wire color	
1	BROWN	BN
2	WHITE	WH
3	BLUE	BU
4	BLACK	BK
5	GREEN/YELLOW	GN/YE


U12 8 POLE
MALE



VIEW FROM THE FRONT SIDE

Pin	Wire color	
1	WHITE	WH
2	BROWN	BN
3	GREEN	GN
4	YELLOW	YE
5	GREY	GY
6	PINK	PK
7	BLUE	BU
8	RED	RD


U12 12 POLE
MALE



VIEW FROM THE FRONT SIDE


Pin	Wire color	
1	WHITE	WH
2	BROWN	BN
3	GREEN	GN
4	YELLOW	YE
5	GREY	GY
6	PINK	PK
7	BLUE	BU
8	RED	RD
9	BLACK	BK
10	VIOLET	VT
11	GREY/PINK	GY/PK
12	RED/BLUE	RD/BU

PANEL CUTOUT

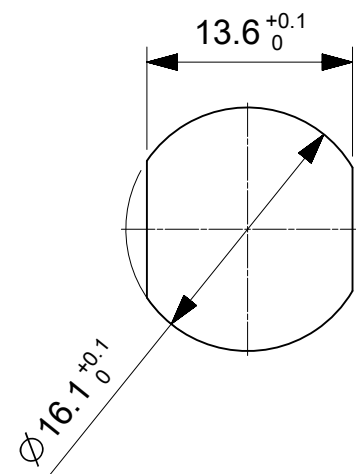


NOTES:

VOLTAGE RATING 4P: 250V AC / DC
VOLTAGE RATING 5P: 60V AC / DC
VOLTAGE RATING 8P: 30V AC / 36V DC
VOLTAGE RATING 12P: 30V AC / DC
AMPERAGE RATING 4P, 5P: 4A
AMPERAGE RATING 8P: 2A
AMPERAGE RATING 12P: 1.5A
PROTECTION CLASS: IP 67
OPERATING TEMPERATURE: -25°C to +90°C

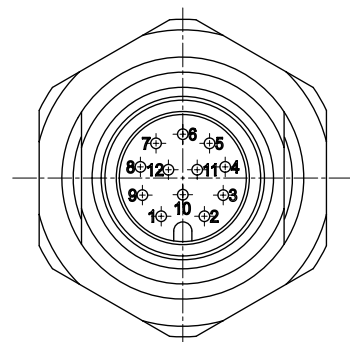

KEYWAY POSITION
FOR 12P

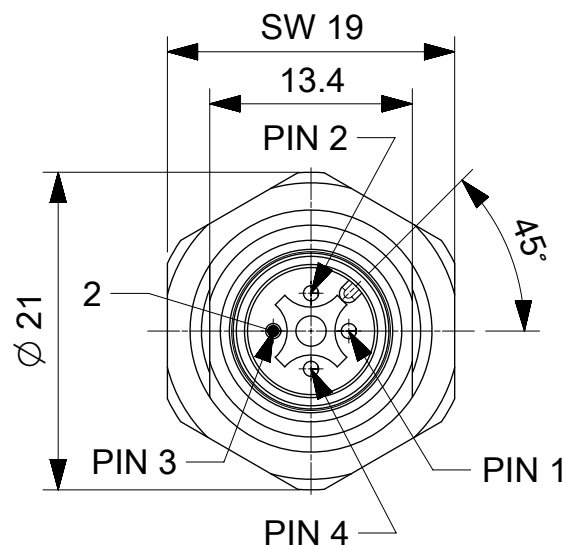

KEYWAY POSITION
FOR 4P, 5P AND 8P

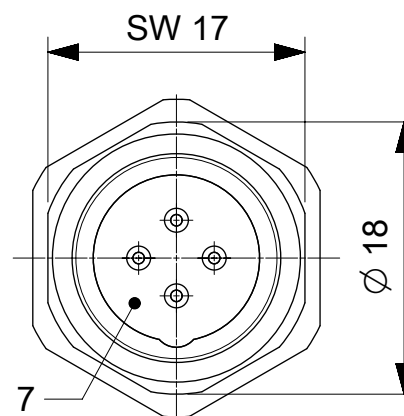
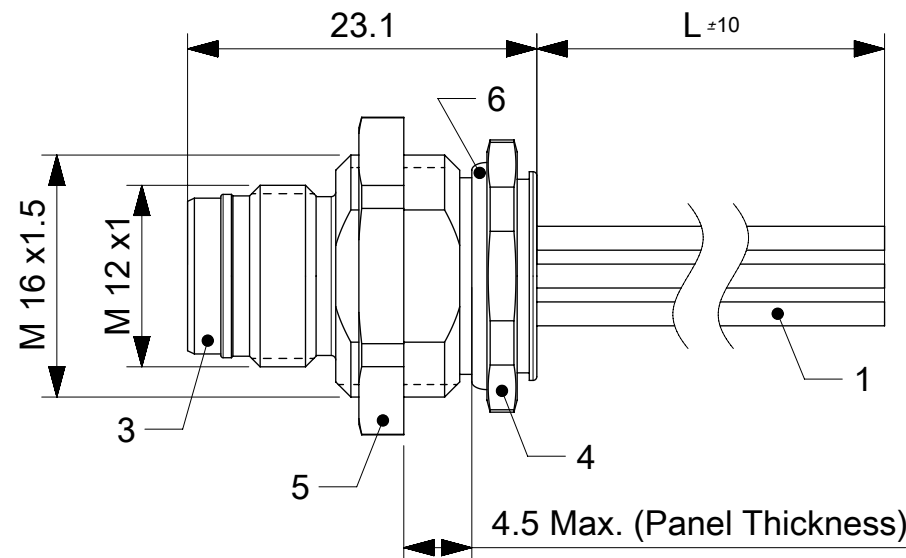



TABLE 1

7	-	POTTING MATERIAL	WEVO	-
6	1	O-RING BLACK	NBR	-
5	1	LOCKNUT M16x1.5	BRASS	Ni
4	1	SHELL M12x1 M16x1.5	BRASS	Ni
3	1	INSERT U12 MALE 4P/5P/8P/12P BK	PA	-
2	4/5/8/12	CONTACT MALE	BRASS	Au
1	-	WIRE 22/24/26 AWG UL1569	PVC	-
ITEM	QTY.	DESCRIPTION	MATERIAL	FINISH

RELEASE STATUS	P1	RELEASE DATE	30.05.2017	12:22:41
----------------	----	--------------	------------	----------

QUALITY SYMBOLS		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION											
	= 0	2017/05/25 2017/05/30 EC NO: 117406 DRWN: FGAIK CHK'D: APPR: BBRAUCH	GENERAL TOLERANCES (UNLESS SPECIFIED)	DIMENSION UNITS		SCALE							
	= 0			MM		2:1							
	= 0			DRWN BY		DATE							
	= 0			ANGULAR TOL ± 1.0 °		FGAIK		2016/11/17		REC U12 XP AC MA PVC XM M16 BM BRA			
	= 0			4 PLACES ±		CHK'D BY		DATE					
	= 0			3 PLACES ±		APPR BY		DATE					
	= 0			2 PLACES ± 0.05		RSILLER		2016/11/23		PRODUCT CUSTOMER DRAWING			
	= 0			1 PLACE ± 0.3		DRAWING SIZE		THIRD ANGLE PROJECTION					
	= 0			0 PLACES ± 0.5		A3							
	= 0			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS						SERIES 120084 MATERIAL NUMBER SEE SHEET 2 CUSTOMER GENERAL MARKET			
	= 0												
	= 0												
								DOCUMENT NUMBER 1200845036					
								DOC TYPE PSD		DOC PART 000			
										SHEET NUMBER 1 OF 2			

ENGINEERING No. - NUMERICAL CODE (Available parts see PART LIST table. Other parts available upon request)

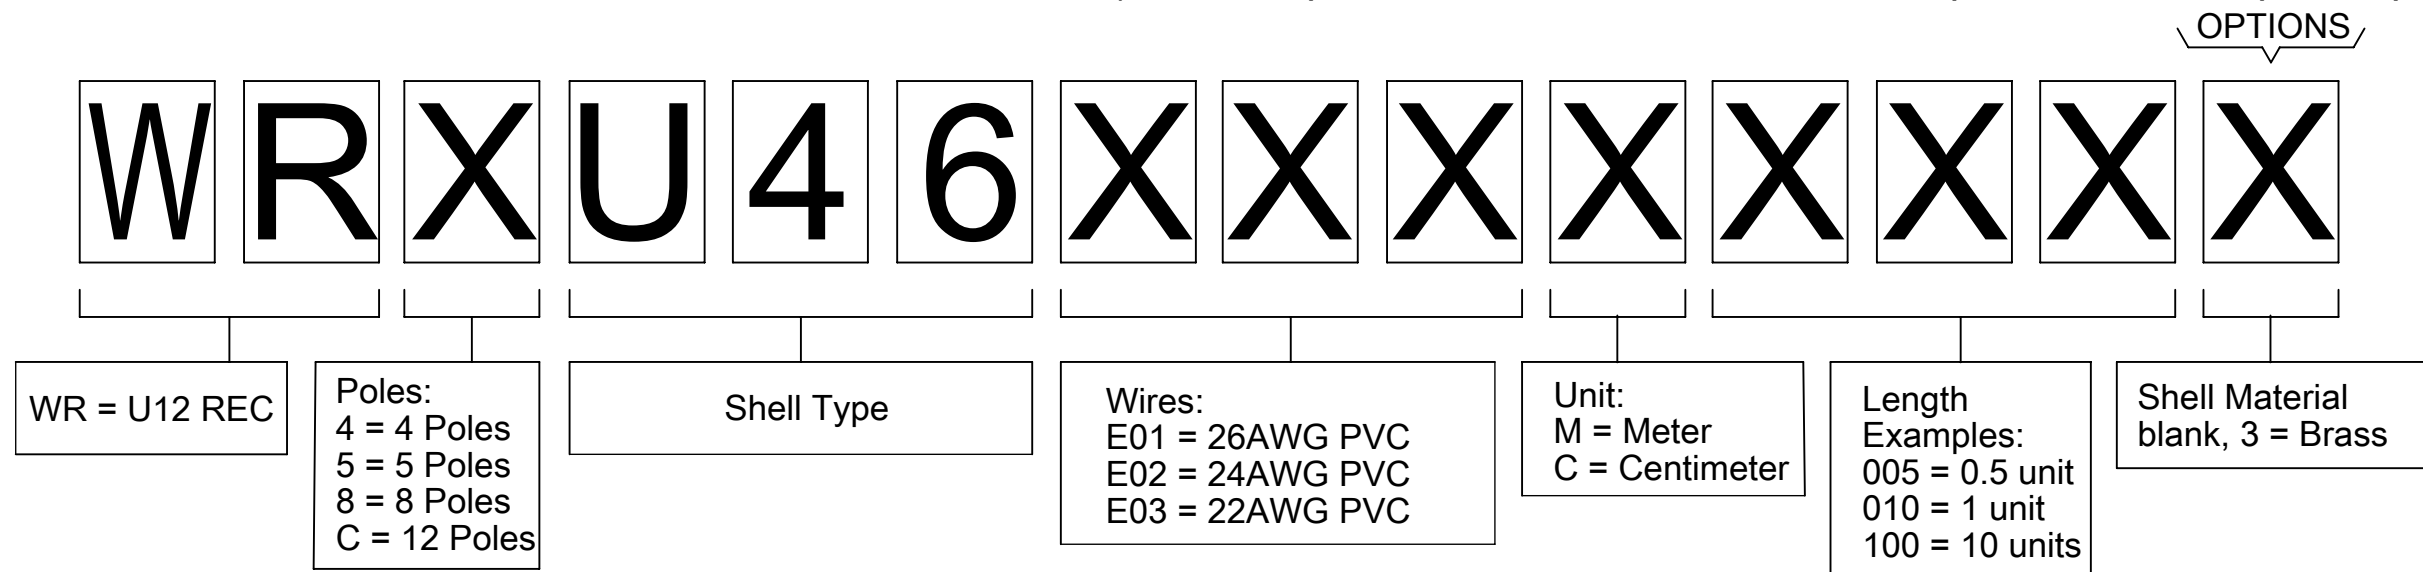


WIRES INFORMATION

WIRE TYPE	AWG	CONSTRUCTION	INSULATION	UL	RATED TEMPERATURE	RATED VOLTAGE	INSULATION DIAMETER
E01	26	7x0.16mm	PVC	UL 1569	105°C	300V	1.30±0.05mm
E02	24	11x0.16mm	PVC	UL 1569	105°C	300V	1.43±0.05mm
E03	22	17x0.16mm	PVC	UL 1569	105°C	300V	1.58±0.05mm

PART LIST

Molex PN	Engineering No.	L [mm]
1200845019	WRCU46E01C300	300
1200845036	WR4U46E03C3003	300
1200845098	WR8U46E02C300	300
1200845161	WR5U46E03C3003	300
1200848122	WRCU46E01M010	1000
1200848171	WR8U46E02C500	500
1200848179	WR4U46E03C0503	50

RELEASE STATUS	P1	RELEASE DATE	30.05.2017	12:22:41
----------------	----	--------------	------------	----------

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION															
QUALITY SYMBOLS		2017/05/25 EC NO: 117406 DRWN: FGAIK CHK'D: APPR: BBRAUCH REV: A1	2017/05/30 REV: A1	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION UNITS		SCALE		molex®					
FA = 0						MM		1:1							
FC = 0				ANGULAR TOL ± 1.0 °				DRWN BY		DATE		REC U12 XP AC MA PVC XM M16 BM BRA			
FP = 0				4 PLACES ±		FGAIK		2016/11/17							
FV = 0				3 PLACES ±		CHK'D BY				DATE					
C = 0				2 PLACES ± 0.05		APPR BY				DATE		PRODUCT CUSTOMER DRAWING			
X = 0				1 PLACE ± 0.3		RSILLER				2016/11/23					
F = 0				0 PLACES ± 0.5		DRAWING SIZE		THIRD ANGLE PROJECTION		SERIES		MATERIAL NUMBER		CUSTOMER	
G = 0				DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		A3				120084		SEE PART LIST		GENERAL MARKET	
H = 0										DOCUMENT NUMBER		DOC TYPE		DOC PART	
								1200845036		PSD		000		2 OF 2	



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.