



# ADM1485—SPECIFICATIONS (V<sub>CC</sub> = 5 V ± 5%. All specifications T<sub>MIN</sub> to T<sub>MAX</sub>, unless otherwise noted.)

| Parameter                                              | Min  | Typ | Max  | Unit | Test Conditions/Comments                                 |
|--------------------------------------------------------|------|-----|------|------|----------------------------------------------------------|
| <b>DRIVER</b>                                          |      |     |      |      |                                                          |
| Differential Output Voltage, V <sub>OD</sub>           |      |     | 5.0  | V    | R = ∞, Test Circuit 1                                    |
|                                                        | 2.0  |     | 5.0  | V    | V <sub>CC</sub> = 5 V, R = 50 Ω (RS-422), Test Circuit 1 |
|                                                        | 1.5  |     | 5.0  | V    | R = 27 Ω (RS-485), Test Circuit 1                        |
| V <sub>OD3</sub>                                       | 1.5  |     | 5.0  | V    | V <sub>TST</sub> = -7 V to +12 V, Test Circuit 2         |
| Δ V <sub>OD</sub>   for Complementary Output States    |      |     | 0.2  | V    | R = 27 Ω or 50 Ω, Test Circuit 1                         |
| Common-Mode Output Voltage V <sub>OC</sub>             |      |     | 3    | V    | R = 27 Ω or 50 Ω, Test Circuit 1                         |
| Δ V <sub>OD</sub>   for Complementary Output States    |      |     | 0.2  | V    | R = 27 Ω or 50 Ω                                         |
| Output Short-Circuit Current (V <sub>OUT</sub> = High) | 35   |     | 250  | mA   | -7 V ≤ V <sub>O</sub> ≤ +12 V                            |
| Output Short-Circuit Current (V <sub>OUT</sub> = Low)  | 35   |     | 250  | mA   | -7 V ≤ V <sub>O</sub> ≤ +12 V                            |
| CMOS Input Logic Threshold Low, V <sub>INL</sub>       |      |     | 0.8  | V    |                                                          |
| CMOS Input Logic Threshold High, V <sub>INH</sub>      | 2.0  |     |      | V    |                                                          |
| Logic Input Current (DE, DI)                           |      |     | ±1.0 | μA   |                                                          |
| <b>RECEIVER</b>                                        |      |     |      |      |                                                          |
| Differential Input Threshold Voltage, V <sub>TH</sub>  | -0.2 |     | +0.2 | V    | -7 V ≤ V <sub>CM</sub> ≤ +12 V                           |
| Input Voltage Hysteresis, ΔV <sub>TH</sub>             |      | 70  |      | mV   | V <sub>CM</sub> = 0 V                                    |
| Input Resistance                                       | 12   |     |      | kΩ   | -7 V ≤ V <sub>CM</sub> ≤ +12 V                           |
| Input Current (A, B)                                   |      |     | 1    | mA   | V <sub>IN</sub> = +12 V                                  |
|                                                        |      |     | -0.8 | mA   | V <sub>IN</sub> = -7 V                                   |
| CMOS Input Logic Threshold Low, V <sub>INL</sub>       |      |     | 0.8  | V    |                                                          |
| CMOS Input Logic Threshold High, V <sub>INH</sub>      | 2.0  |     |      | V    |                                                          |
| Logic Enable Input Current ( $\overline{\text{RE}}$ )  |      |     | ±1   | μA   |                                                          |
| CMOS Output Voltage Low, V <sub>OL</sub>               |      |     | 0.4  | V    | I <sub>OUT</sub> = +4.0 mA                               |
| CMOS Output Voltage High, V <sub>OH</sub>              | 4.0  |     |      | V    | I <sub>OUT</sub> = -4.0 mA                               |
| Short-Circuit Output Current                           | 7    |     | 85   | mA   | V <sub>OUT</sub> = GND or V <sub>CC</sub>                |
| Three-State Output Leakage Current                     |      |     | ±1.0 | μA   | 0.4 V ≤ V <sub>OUT</sub> ≤ 2.4 V                         |
| <b>POWER SUPPLY CURRENT</b>                            |      |     |      |      |                                                          |
| I <sub>CC</sub> (Outputs Enabled)                      |      | 1.0 | 2.2  | mA   | Digital Inputs = GND or V <sub>CC</sub>                  |
| I <sub>CC</sub> (Outputs Disabled)                     |      | 0.6 | 1    | mA   | Digital Inputs = GND or V <sub>CC</sub>                  |

Specifications subject to change without notice.

## TIMING SPECIFICATIONS (V<sub>CC</sub> = 5 V ± 5%. All specifications T<sub>MIN</sub> to T<sub>MAX</sub>, unless otherwise noted.)

| Parameter                                                                   | Min | Typ | Max | Unit | Test Conditions/Comments                                                               |
|-----------------------------------------------------------------------------|-----|-----|-----|------|----------------------------------------------------------------------------------------|
| <b>DRIVER</b>                                                               |     |     |     |      |                                                                                        |
| Propagation Delay Input to Output t <sub>PLH</sub> , t <sub>PHL</sub>       | 2   | 10  | 15  | ns   | R <sub>L</sub> DIFF = 54 Ω, C <sub>L1</sub> = C <sub>L2</sub> = 100 pF, Test Circuit 3 |
| Driver O/P to $\overline{\text{O/P}}$ t <sub>SKEW</sub>                     |     | 1   | 5   | ns   | R <sub>L</sub> DIFF = 54 Ω, C <sub>L1</sub> = C <sub>L2</sub> = 100 pF, Test Circuit 3 |
| Driver Rise/Fall Time t <sub>R</sub> , t <sub>F</sub>                       |     | 8   | 15  | ns   | R <sub>L</sub> DIFF = 54 Ω, C <sub>L1</sub> = C <sub>L2</sub> = 100 pF, Test Circuit 3 |
| Driver Enable to Output Valid                                               |     | 10  | 25  | ns   | R <sub>L</sub> = 110 Ω, C <sub>L</sub> = 50 pF, Test Circuit 4                         |
| Driver Disable Timing                                                       |     | 10  | 25  | ns   | R <sub>L</sub> = 110 Ω, C <sub>L</sub> = 50 pF, Test Circuit 4                         |
| Matched Enable Switching                                                    |     | 0   | 2   | ns   | R <sub>L</sub> = 110 Ω, C <sub>L</sub> = 50 pF, Test Circuit 4*                        |
| t <sub>AZH</sub> - t <sub>BZL</sub>  ,  t <sub>BZH</sub> - t <sub>AZL</sub> |     |     |     |      |                                                                                        |
| Matched Disable Switching                                                   |     | 0   | 2   | ns   | R <sub>L</sub> = 110 Ω, C <sub>L</sub> = 50 pF, Test Circuit 4*                        |
| t <sub>AHZ</sub> - t <sub>BLZ</sub>  ,  t <sub>BHZ</sub> - t <sub>ALZ</sub> |     |     |     |      |                                                                                        |
| <b>RECEIVER</b>                                                             |     |     |     |      |                                                                                        |
| Propagation Delay Input to Output t <sub>PLH</sub> , t <sub>PHL</sub>       | 8   | 15  | 30  | ns   | C <sub>L</sub> = 15 pF, Test Circuit 5                                                 |
| Skew  t <sub>PLH</sub> - t <sub>PHL</sub>                                   |     |     | 5   | ns   | C <sub>L</sub> = 15 pF, Test Circuit 5                                                 |
| Receiver Enable t <sub>EN1</sub>                                            |     | 5   | 20  | ns   | C <sub>L</sub> = 15 pF, R <sub>L</sub> = 1 kΩ, Test Circuit 6                          |
| Receiver Disable t <sub>EN2</sub>                                           |     | 5   | 20  | ns   | C <sub>L</sub> = 15 pF, R <sub>L</sub> = 1 kΩ, Test Circuit 6                          |
| Tx Pulse Width Distortion                                                   |     | 1   |     | ns   |                                                                                        |
| Rx Pulse Width Distortion                                                   |     | 1   |     | ns   |                                                                                        |

\*Guaranteed by characterization.

Specifications subject to change without notice.

**ABSOLUTE MAXIMUM RATINGS\***(T<sub>A</sub> = 25°C, unless otherwise noted.)

|                                                    |                                   |
|----------------------------------------------------|-----------------------------------|
| V <sub>CC</sub> .....                              | –0.3 V to +7 V                    |
| <b>Inputs</b>                                      |                                   |
| Driver Input (DI) .....                            | –0.3 V to V <sub>CC</sub> + 0.3 V |
| Control Inputs (DE, $\overline{\text{RE}}$ ) ..... | –0.3 V to V <sub>CC</sub> + 0.3 V |
| Receiver Inputs (A, B) .....                       | –9 V to +14 V                     |
| <b>Outputs</b>                                     |                                   |
| Driver Outputs (A, B) .....                        | –9 V to +14 V                     |
| Receiver Output .....                              | –0.5 V to V <sub>CC</sub> + 0.5 V |
| Power Dissipation 8-Lead MSOP .....                | 900 mW                            |
| θ <sub>JA</sub> , Thermal Impedance .....          | 206°C/W                           |
| Power Dissipation 8-Lead PDIP .....                | 500 mW                            |
| θ <sub>JA</sub> , Thermal Impedance .....          | 130°C/W                           |
| Power Dissipation 8-Lead SOIC .....                | 450 mW                            |
| θ <sub>JA</sub> , Thermal Impedance .....          | 170°C/W                           |
| <b>Operating Temperature Range</b>                 |                                   |
| Commercial (J Version) .....                       | 0°C to 70°C                       |
| Industrial (A Version) .....                       | –40°C to +85°C                    |
| Storage Temperature Range .....                    | –65°C to +150°C                   |
| Lead Temperature (Soldering, 10 sec) .....         | 300°C                             |
| Vapor Phase (60 sec) .....                         | 215°C                             |
| Infrared (15 sec) .....                            | 220°C                             |

\*Stresses above those listed under Absolute Maximum Ratings may cause permanent damage to the device. This is a stress rating only; functional operation of the device at these or any other conditions above those listed in the operational sections of this specification is not implied. Exposure to absolute maximum ratings for extended periods of time may affect device reliability.

**Table I. Transmitting**


| Inputs |    | Outputs |   |
|--------|----|---------|---|
| DE     | DI | B       | A |
| 1      | 1  | 0       | 1 |
| 1      | 0  | 1       | 0 |
| 0      | X  | Z       | Z |

**Table II. Receiving**

| $\overline{\text{RE}}$ | Inputs<br>A-B | Outputs<br>RO |
|------------------------|---------------|---------------|
| 0                      | ≥ +0.2 V      | 1             |
| 0                      | ≤ –0.2 V      | 0             |
| 0                      | Inputs Open   | 1             |
| 1                      | X             | Z             |

**PIN FUNCTION DESCRIPTIONS**

| Pin No. | Mnemonic               | Function                                                                                                                              |
|---------|------------------------|---------------------------------------------------------------------------------------------------------------------------------------|
| 1       | RO                     | Receiver Output. When enabled if A > B by 200 mV, then RO = High. If A < B by 200 mV, then RO = Low.                                  |
| 2       | $\overline{\text{RE}}$ | Receiver Output Enable. A low level enables the receiver output, RO. A high level places it in a high impedance state.                |
| 3       | DE                     | Driver Output Enable. A high level enables the driver differential outputs, A and B. A low level places it in a high impedance state. |
| 4       | DI                     | Driver Input. When the driver is enabled, a logic low on DI forces A low and B high while a logic high on DI forces A high and B low. |
| 5       | GND                    | Ground Connection, 0 V.                                                                                                               |
| 6       | A                      | Noninverting Receiver Input A/Driver Output A.                                                                                        |
| 7       | B                      | Inverting Receiver Input B/Driver Output B                                                                                            |
| 8       | V <sub>CC</sub>        | Power Supply, 5 V ± 5%.                                                                                                               |


**PIN CONFIGURATION****CAUTION**

ESD (electrostatic discharge) sensitive device. Electrostatic charges as high as 4000 V readily accumulate on the human body and test equipment and can discharge without detection. Although the ADM1485 features proprietary ESD protection circuitry, permanent damage may occur on devices subjected to high energy electrostatic discharges. Therefore, proper ESD precautions are recommended to avoid performance degradation or loss of functionality.




# ADM1485


## Test Circuits

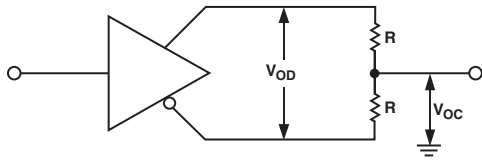


Test Circuit 1. Driver Voltage Measurement

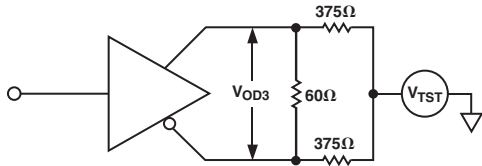


Test Circuit 2. Driver Voltage Measurement

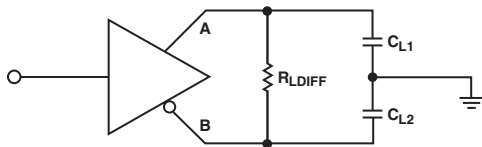


Test Circuit 3. Driver Propagation Delay

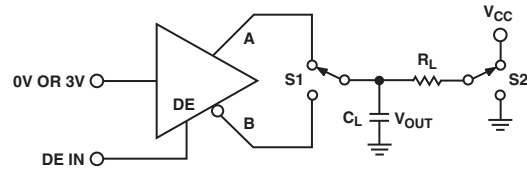

Test Circuit 4. Driver Enable/Disable



Test Circuit 5. Receiver Propagation Delay

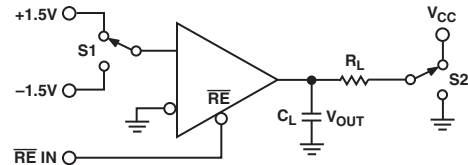

Test Circuit 6. Receiver Enable/Disable

## Switching Characteristics

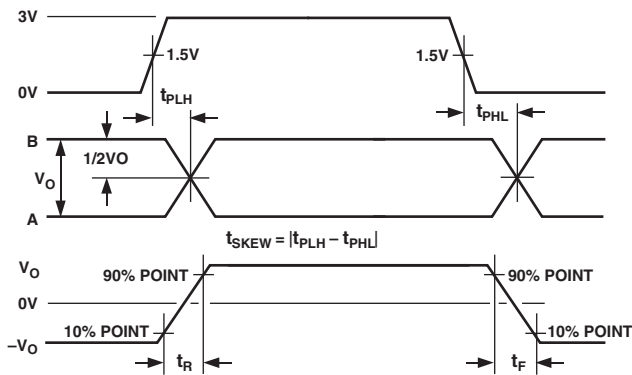


Figure 1. Driver Propagation Delay, Rise/Fall Timing

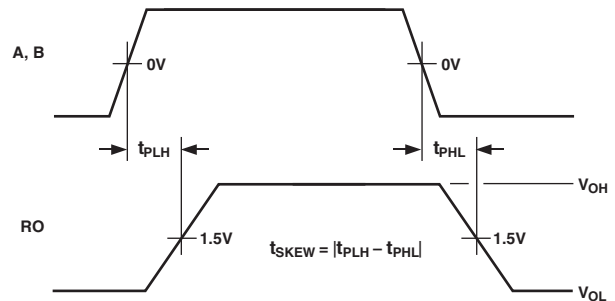


Figure 3. Receiver Propagation Delay

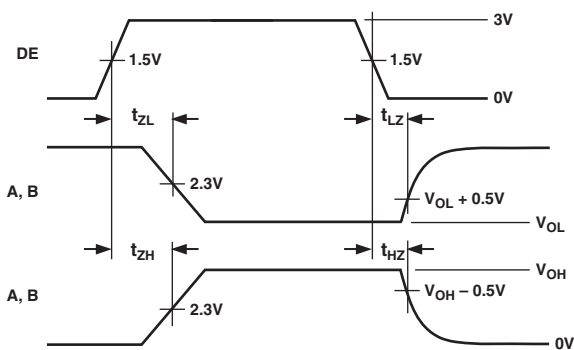


Figure 2. Driver Enable/Disable Timing



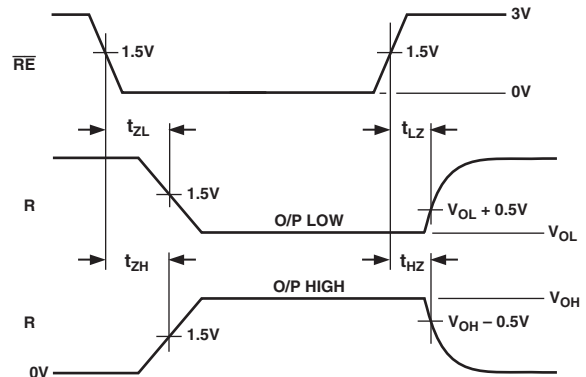


Figure 4. Receiver Enable/Disable Timing


# Typical Performance Characteristics—ADM1485

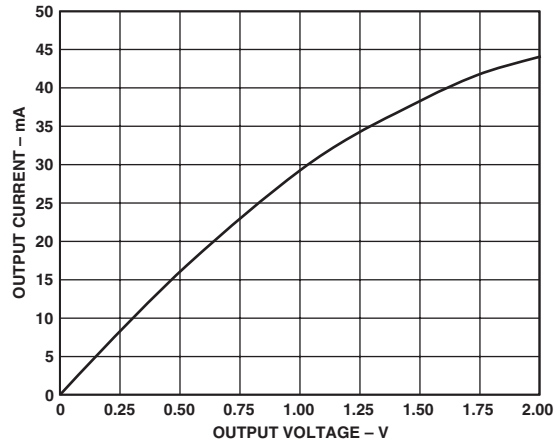


TPC 1. Output Current vs. Receiver Output Low Voltage

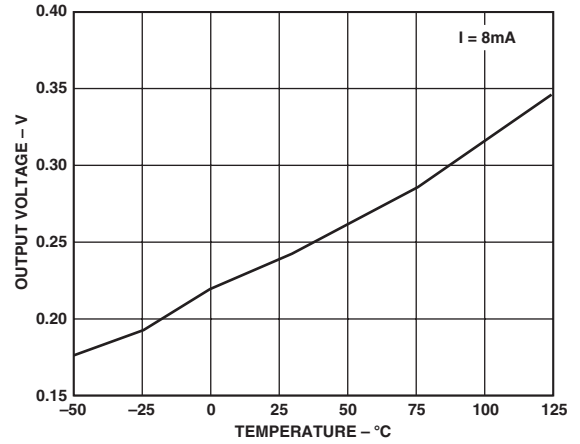


TPC 4. Receiver Output Low Voltage vs. Temperature

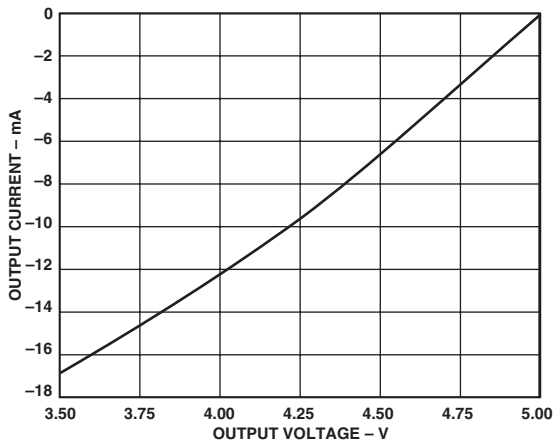


TPC 2. Output Current vs. Receiver Output High Voltage

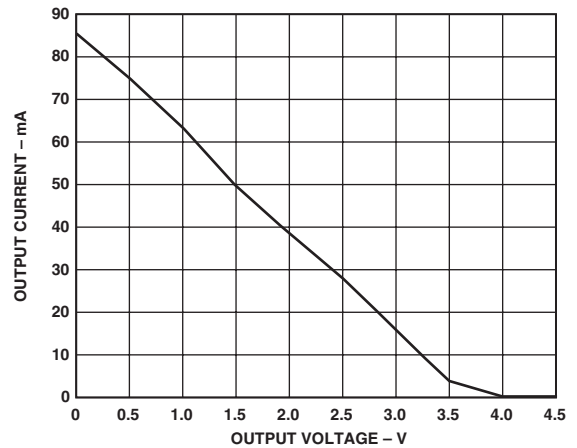

TPC 5. Output Current vs. Driver Differential Output Voltage

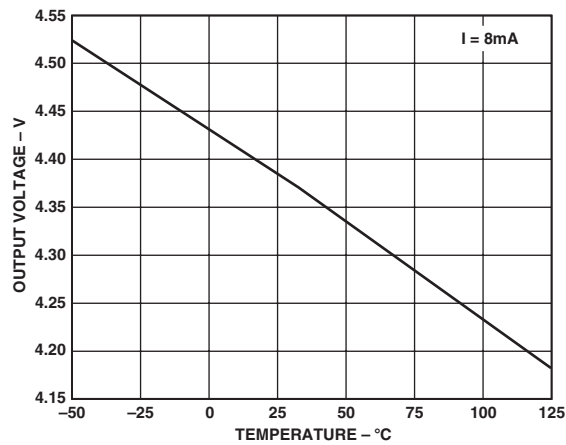


TPC 3. Receiver Output High Voltage vs. Temperature

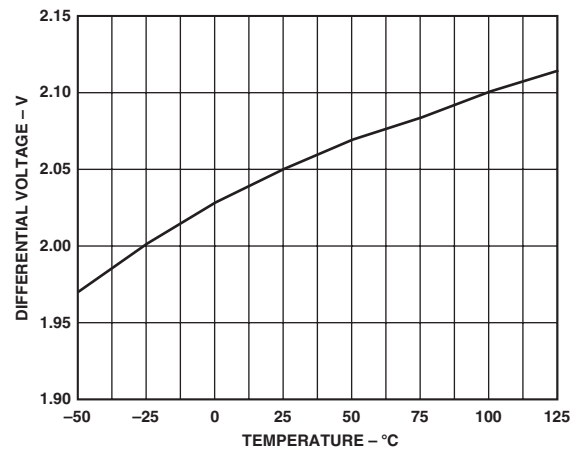


TPC 6. Driver Differential Output Voltage vs. Temperature,  $R_L = 26.8 \Omega$


# ADM1485

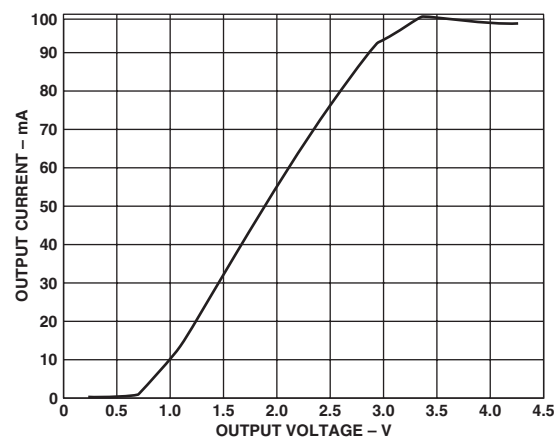


TPC 7. Output Current vs. Driver Output Low Voltage

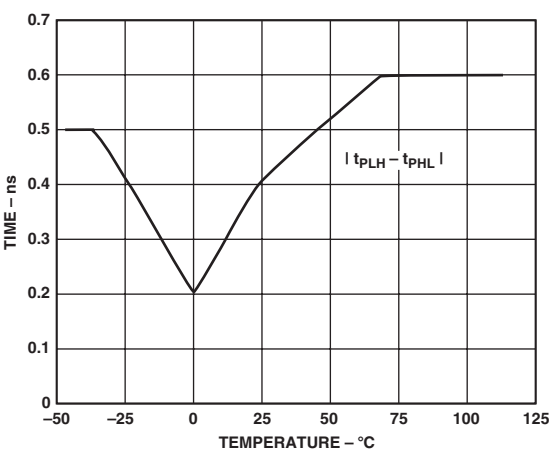


TPC 10. Rx Skew vs. Temperature

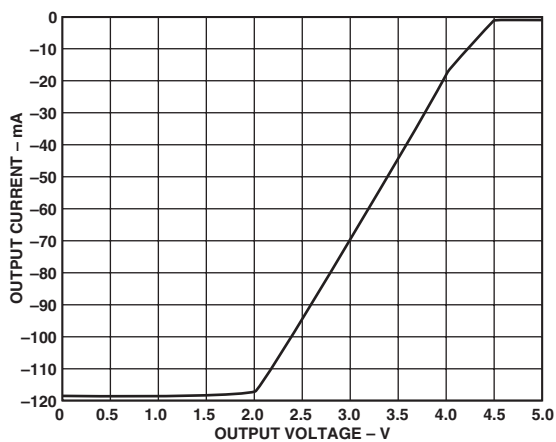


TPC 8. Output Current vs. Driver Output High Voltage

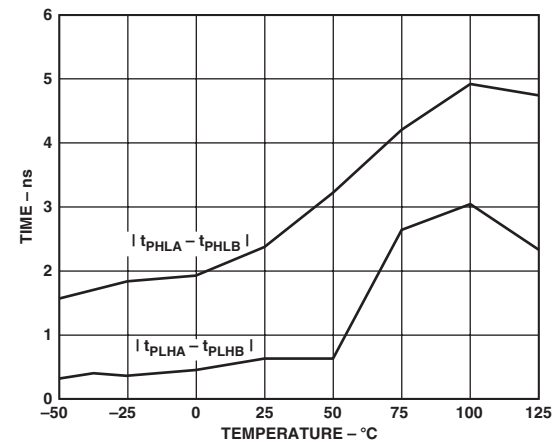


TPC 11. Tx Skew vs. Temperature

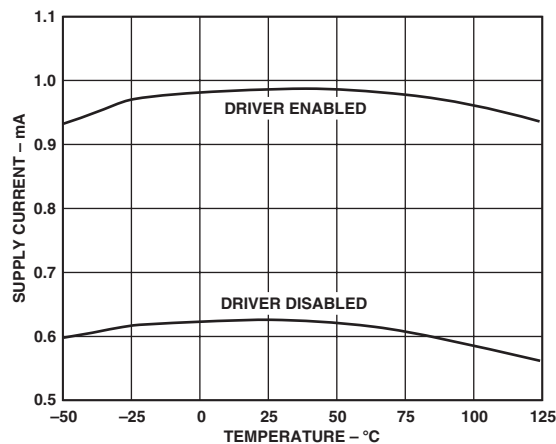


TPC 9. Supply Current vs. Temperature

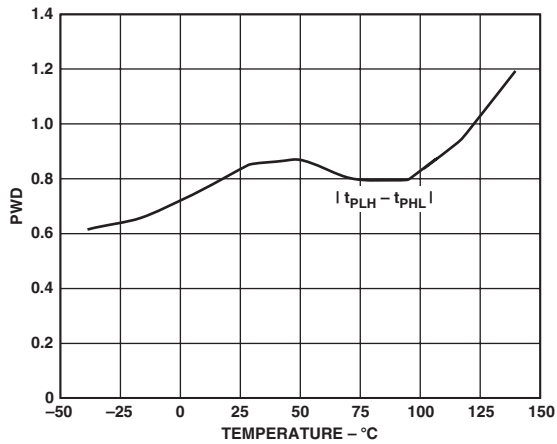


TPC 12. Tx Pulse Width Distortion

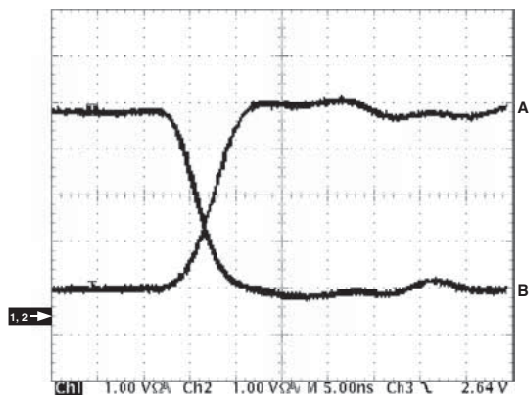


TPC 13. Unloaded Driver Differential Outputs

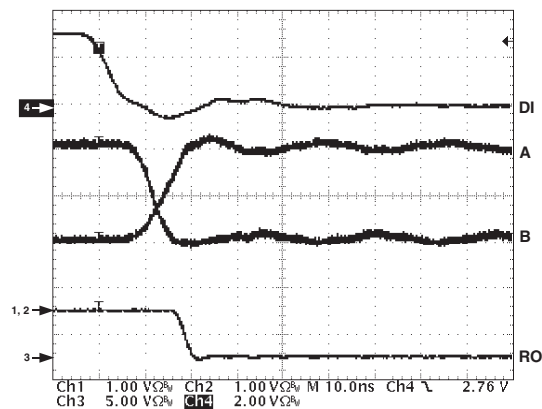


TPC 16. Driver/Receiver Propagation Delays High to Low

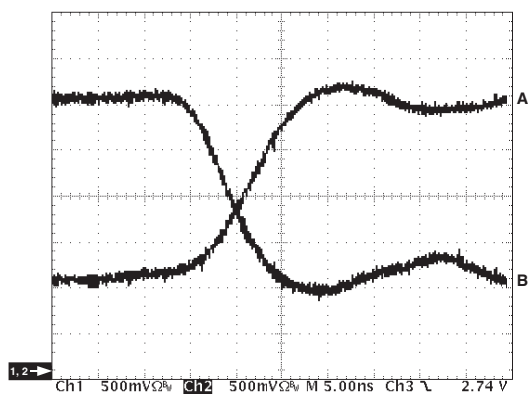

TPC 14. Loaded Driver Differential Outputs

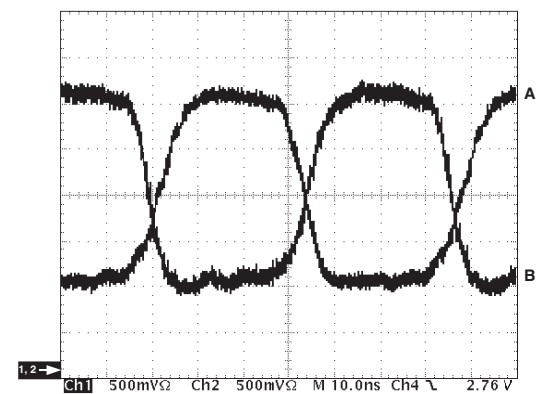

TPC 17. Driver Output at 30 Mbps

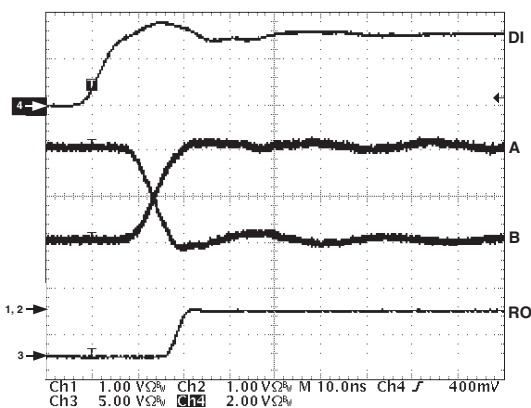

TPC 15. Driver/Receiver Propagation Delays Low to High

# ADM1485

## APPLICATION INFORMATION

### Differential Data Transmission

Differential data transmission is used to reliably transmit data at high rates over long distances and through noisy environments. Differential transmission nullifies the effects of ground shifts and noise signals that appear as common-mode voltages on the line. There are two main standards approved by the Electronics Industries Association (EIA) that specify the electrical characteristics of transceivers used in differential data transmission.

The RS-422 standard specifies data rates up to 10 MBaud and line lengths up to 4000 ft. A single driver can drive a transmission line with up to 10 receivers.

In order to cater to true multipoint communications, the RS-485 standard was defined. This standard meets or exceeds all the requirements of the RS-422 but also allows for up to 32 drivers and 32 receivers to be connected to a single bus. An extended common-mode range of  $-7\text{ V}$  to  $+12\text{ V}$  is defined. The most significant difference between the RS-422 and the RS-485 is the fact that the drivers may be disabled, thereby allowing more than one (32 in fact) to be connected to a single line. Only one driver should be enabled at a time, but the RS-485 standard contains additional specifications to guarantee device safety in the event of line contention.

**Table III. Comparison of RS-422 and RS-485 Interface Standards**


| Specification                     | RS-422                         | RS-485                          |
|-----------------------------------|--------------------------------|---------------------------------|
| Transmission Type                 | Differential                   | Differential                    |
| Maximum Cable Length              | 4000 ft.                       | 4000 ft.                        |
| Minimum Driver Output Voltage     | $\pm 2\text{ V}$               | $\pm 1.5\text{ V}$              |
| Driver Load Impedance             | 100 $\Omega$                   | 54 $\Omega$                     |
| Receiver Input Resistance         | 4 k $\Omega$ min               | 12 k $\Omega$ min               |
| Receiver Input Sensitivity        | $\pm 200\text{ mV}$            | $\pm 200\text{ mV}$             |
| Receiver Input Voltage Range      | $-7\text{ V}$ to $+7\text{ V}$ | $-7\text{ V}$ to $+12\text{ V}$ |
| No. of Drivers/Receivers per Line | 1/10                           | 32/32                           |

### Cable and Data Rate

The transmission line of choice for RS-485 communications is a twisted pair. Twisted pair cable tends to cancel common-mode noise and also causes cancellation of the magnetic fields generated by the current flowing through each wire, thereby reducing the effective inductance of the pair.

The ADM1485 is designed for bidirectional data communications on multipoint transmission lines. A typical application showing a multipoint transmission network is illustrated in Figure 5. An RS-485 transmission line can have as many as 32 transceivers on the bus. Only one driver can transmit at a particular time, but multiple receivers may be enabled simultaneously.

As with any transmission line, it is important that reflections are minimized. This can be achieved by terminating the extreme ends of the line using resistors equal to the characteristic impedance of the line. Stub lengths of the main line should also be kept as short as possible. A properly terminated transmission line appears purely resistive to the driver.

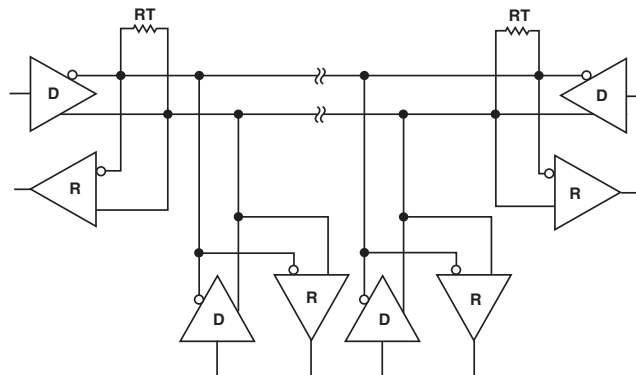

**Figure 5. Typical RS-485 Network**

### Thermal Shutdown

The ADM1485 contains thermal shutdown circuitry that protects the part from excessive power dissipation during fault conditions. Shorting the driver outputs to a low impedance source can result in high driver currents. The thermal sensing circuitry detects the increase in die temperature and disables the driver outputs. The thermal sensing circuitry is designed to disable the driver outputs when a die temperature of  $150^{\circ}\text{C}$  is reached. As the device cools, the drivers are re-enabled at  $140^{\circ}\text{C}$ .

### Propagation Delay


The ADM1485 features very low propagation delay, ensuring maximum baud rate operation. The driver is well balanced, ensuring distortion free transmission.

Another important specification is a measure of the skew between the complementary outputs. Excessive skew impairs the noise immunity of the system and increases the amount of electro-magnetic interference (EMI).

### Receiver Open-Circuit Fail-Safe

The receiver input includes a fail-safe feature that guarantees a logic high on the receiver when the inputs are open circuit or floating.

## OUTLINE DIMENSIONS

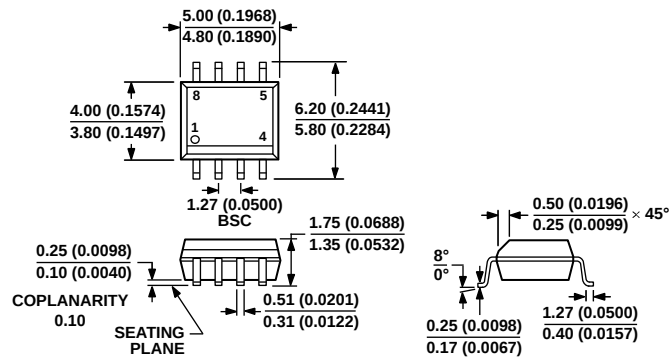


COMPLIANT TO JEDEC STANDARDS MS-012-AA  
CONTROLLING DIMENSIONS ARE IN MILLIMETERS; INCH DIMENSIONS (IN PARENTHESES) ARE ROUNDED-OFF MILLIMETER EQUIVALENTS FOR REFERENCE ONLY AND ARE NOT APPROPRIATE FOR USE IN DESIGN.

Figure 6. 8-Lead Standard Small Outline Package [SOIC\_N]  
Narrow Body  
(R-8)

Dimensions shown in millimeters and (inches)

012407-A

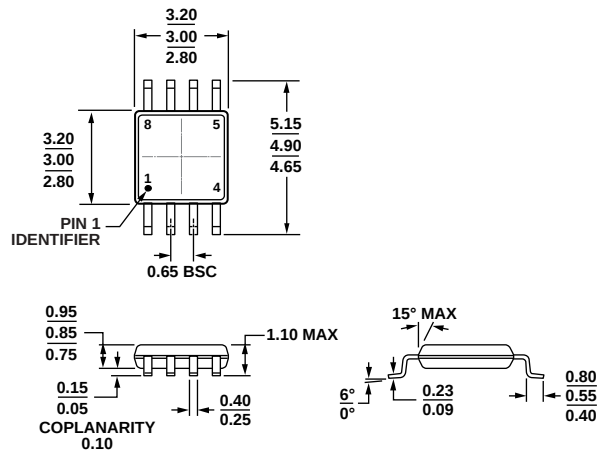


COMPLIANT TO JEDEC STANDARDS MO-187-AA

Figure 7. 8-Lead Mini Small Outline Package [MSOP]  
(RM-8)

Dimensions shown in millimeters

10-07-2009-B

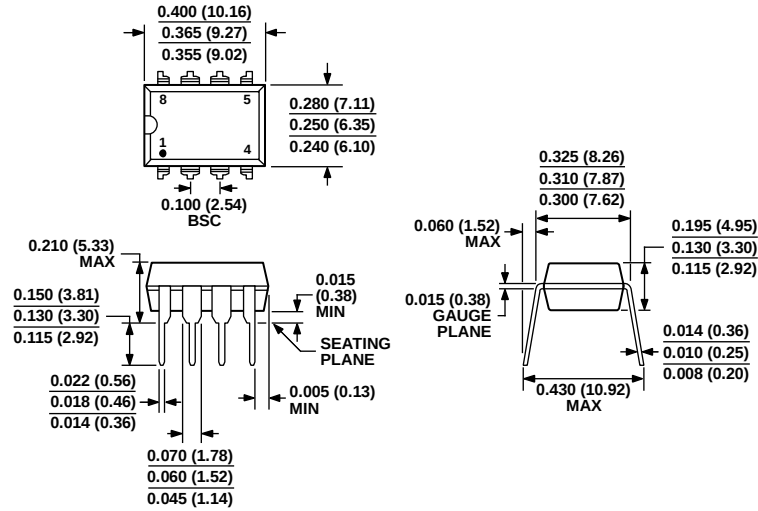

COMPLIANT TO JEDEC STANDARDS MS-001  
CONTROLLING DIMENSIONS ARE IN INCHES; MILLIMETER DIMENSIONS (IN PARENTHESES) ARE ROUNDED-OFF INCH EQUIVALENTS FOR REFERENCE ONLY AND ARE NOT APPROPRIATE FOR USE IN DESIGN. CORNER LEADS MAY BE CONFIGURED AS WHOLE OR HALF LEADS.

0718605-A

Figure 8. 8-Lead Plastic Dual In-Line Package [PDIP]  
Narrow Body  
(N-8)  
Dimensions shown in inches and (millimeters)

## ORDERING GUIDE

| Model <sup>1</sup> | Temperature Range | Package Description | Package Option | Brand |
|--------------------|-------------------|---------------------|----------------|-------|
| ADM1485JNZ         | 0°C to 70°C       | 8-Lead PDIP         | N-8            |       |
| ADM1485JRZ         | 0°C to 70°C       | 8-Lead SOIC_N       | R-8            |       |
| ADM1485JR-REEL     | 0°C to 70°C       | 8-Lead SOIC_N       | R-8            |       |
| ADM1485JRZ-REEL    | 0°C to 70°C       | 8-Lead SOIC_N       | R-8            |       |
| ADM1485ANZ         | −40°C to +85°C    | 8-Lead PDIP         | N-8            |       |
| ADM1485ARMZ        | −40°C to +85°C    | 8-Lead MSOP         | RM-8           | M42   |
| ADM1485ARMZ-REEL   | −40°C to +85°C    | 8-Lead MSOP         | RM-8           | M42   |
| ADM1485ARMZ-REEL7  | −40°C to +85°C    | 8-Lead MSOP         | RM-8           | M42   |
| ADM1485ARZ         |                   | 8-Lead SOIC_N       | R-8            |       |
| ADM1485ARZ-REEL    |                   | 8-Lead SOIC_N       | R-8            |       |
| ADM1485ARZ-REEL7   |                   | 8-Lead SOIC_N       | R-8            |       |
| ADM1485JCHIPS      |                   | Die                 | Die            |       |

<sup>1</sup> Z = RoHS Compliant Part.

**REVISION HISTORY**

**8/12—Rev. E to Rev. F**

Changed Data Rates of Up to 5 Mbps to Typical Data Rates  
of 30 Mbps..... 1  
Updated Outline Dimensions ..... 9  
Changes to Ordering Guide ..... 10

**9/03—Data Sheet changed from REV. D to REV. E.**

Change to SPECIFICATIONS ..... 2  
Changes to ORDERING GUIDE ..... 3  
Updated OUTLINE DIMENSIONS ..... 9

**7/03—Data Sheet changed from REV. C to REV. D.**

Changes to SPECIFICATIONS ..... 2  
Changes to ABSOLUTE MAXIMUM RATINGS..... 3  
Updated ORDERING GUIDE..... 3

**1/03—Data Sheet changed from REV. B to REV. C.**

Change to SPECIFICATIONS ..... 2  
Change to ORDERING GUIDE..... 3

**12/02—Data Sheet changed from REV. A to REV. B.**

Deleted Q-8 Package..... Universal  
Edits to FEATURES ..... 1  
Edits to GENERAL DESCRIPTION ..... 1  
Edits, additions to SPECIFICATIONS ..... 2  
Edits, additions to ABSOLUTE MAXIMUM RATINGS..... 3  
Additions to ORDERING GUIDE..... 3  
TPCs updated and reformatted ..... 5  
Addition of 8-Lead MSOP Package ..... 9  
Update to OUTLINE DIMENSIONS ..... 9





Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.