



# Zeners

## BZX84C 3V3 - BZX84C 33

Tolerance: C = 5%

### Absolute Maximum Ratings\*


T<sub>A</sub> = 25°C unless otherwise noted

| Symbol           | Parameter                                           | Value       | Units |
|------------------|-----------------------------------------------------|-------------|-------|
| I <sub>FRM</sub> | Repetitive Peak Forward Current (I <sub>FRM</sub> ) | 250         | mA    |
| I <sub>ZRM</sub> | Repetitive Peak Working Current (I <sub>ZRM</sub> ) | 250         | mA    |
| P <sub>D</sub>   | Power Dissipation                                   | 350         | mW    |
| T <sub>STG</sub> | Storage Temperature Range                           | -55 to +150 | °C    |
| T <sub>J</sub>   | Operating Junction Temperature                      | -55 to +150 | °C    |

\*These ratings are limiting values above which the serviceability of the diode may be impaired.


#### NOTES:

- 1) These ratings are based on a maximum junction temperature of 150 degrees C.
- 2) These are steady state limits. The factory should be consulted on applications involving pulsed or low duty cycle operations.



SOT-23

#### CONNECTION DIAGRAM



### Electrical Characteristics

T<sub>A</sub> = 25°C unless otherwise noted

| Device            | Mark | I <sub>Z</sub> = 5.0 mA |      |                    | I <sub>Z</sub> = 1.0 mA |      |                    | I <sub>Z</sub> = 20 mA |      |                    |
|-------------------|------|-------------------------|------|--------------------|-------------------------|------|--------------------|------------------------|------|--------------------|
|                   |      | V <sub>Z</sub> (V)      |      | Z <sub>Z</sub> (Ω) | V <sub>Z</sub> (V)      |      | Z <sub>Z</sub> (Ω) | V <sub>Z</sub> (V)     |      | Z <sub>Z</sub> (Ω) |
|                   |      | MIN                     | MAX  |                    | MIN                     | MAX  |                    | MIN                    | MAX  |                    |
| BZX84C 3V3        | Z14  | 3.1                     | 3.5  | 95                 | 2.3                     | 2.9  | 600                | 3.6                    | 4.2  | 40                 |
| BZX84C 3V6        | Z15  | 3.4                     | 3.8  | 90                 | 2.7                     | 3.3  | 600                | 3.9                    | 4.5  | 40                 |
| BZX84C 3V9        | Z16  | 3.7                     | 4.1  | 90                 | 2.9                     | 3.5  | 600                | 4.1                    | 4.7  | 30                 |
| BZX84C 4V3        | Z17  | 4.0                     | 4.6  | 90                 | 3.3                     | 4.0  | 600                | 4.4                    | 5.1  | 30                 |
| <b>BZX84C 4V7</b> | Z1   | 4.4                     | 5.0  | 80                 | 3.7                     | 4.7  | 500                | 4.5                    | 5.4  | 15                 |
| <b>BZX84C 5V1</b> | Z2   | 4.8                     | 5.4  | 60                 | 4.2                     | 5.3  | 480                | 5.0                    | 5.9  | 15                 |
| <b>BZX84C 5V6</b> | Z3   | 5.2                     | 6.0  | 40                 | 4.8                     | 6.0  | 400                | 5.2                    | 6.3  | 10                 |
| <b>BZX84C 6V2</b> | Z4   | 5.8                     | 6.6  | 10                 | 5.6                     | 6.6  | 150                | 5.8                    | 6.8  | 6                  |
| <b>BZX84C 6V8</b> | Z5   | 6.4                     | 7.2  | 15                 | 6.3                     | 7.2  | 80                 | 6.4                    | 7.4  | 6                  |
| BZX84C 7V5        | Z6   | 7.0                     | 7.9  | 15                 | 6.9                     | 7.9  | 80                 | 7.0                    | 8.0  | 6                  |
| <b>BZX84C 8V2</b> | Z7   | 7.7                     | 8.7  | 15                 | 7.6                     | 8.7  | 80                 | 7.7                    | 8.8  | 6                  |
| <b>BZX84C 9V1</b> | Z8   | 8.5                     | 9.6  | 15                 | 8.4                     | 9.6  | 100                | 8.5                    | 9.7  | 8                  |
| <b>BZX84C 10</b>  | Z9   | 9.4                     | 10.6 | 20                 | 9.3                     | 10.6 | 150                | 9.4                    | 10.7 | 10                 |
| BZX84C 11         | Y1   | 10.4                    | 11.6 | 20                 | 10.2                    | 11.6 | 150                | 10.4                   | 11.8 | 10                 |
| <b>BZX84C 12</b>  | Y2   | 11.4                    | 12.7 | 25                 | 11.2                    | 12.7 | 150                | 11.4                   | 12.9 | 10                 |
| BZX84C 13         | Y3   | 12.4                    | 14.1 | 30                 | 12.3                    | 14.0 | 170                | 12.5                   | 14.2 | 15                 |
| <b>BZX84C 15</b>  | Y4   | 13.8                    | 15.6 | 30                 | 13.7                    | 15.5 | 200                | 13.9                   | 15.7 | 20                 |
| BZX84C 16         | Y5   | 15.3                    | 17.1 | 40                 | 15.2                    | 17   | 200                | 15.4                   | 17.2 | 20                 |
| BZX84C 18         | Y6   | 16.8                    | 19.1 | 45                 | 16.7                    | 19   | 225                | 16.9                   | 19.2 | 20                 |
| BZX84C 20         | Y7   | 18.8                    | 21.2 | 55                 | 18.7                    | 21.1 | 225                | 18.9                   | 21.4 | 20                 |
| BZX84C 22         | Y8   | 20.8                    | 23.3 | 55                 | 20.7                    | 23.2 | 250                | 20.9                   | 23.4 | 25                 |
| BZX84C 24         | Y9   | 22.8                    | 25.6 | 70                 | 22.7                    | 25.5 | 250                | 22.9                   | 25.7 | 25                 |

# Zeners (BZX84C 3V3 - BZX84C 33)

(continued)

## Electrical Characteristics (continued)

TA = 25°C unless otherwise noted

| Device           | Mark | I <sub>Z</sub> = 2.0 mA |      |                    | I <sub>Z</sub> = 100 µA |      |                    | I <sub>Z</sub> = 10 mA |      |                    |
|------------------|------|-------------------------|------|--------------------|-------------------------|------|--------------------|------------------------|------|--------------------|
|                  |      | V <sub>Z</sub> (V)      |      | Z <sub>Z</sub> (Ω) | V <sub>Z</sub> (V)      |      | Z <sub>Z</sub> (Ω) | V <sub>Z</sub> (V)     |      | Z <sub>Z</sub> (Ω) |
|                  |      | MIN                     | MAX  |                    | MIN                     | MAX  |                    | MIN                    | MAX  |                    |
| BZX84C 27        | Y10  | 25.1                    | 28.9 | 80                 | 25                      | 28.9 | 300                | 25.2                   | 29.3 | 45                 |
| <b>BZX84C 30</b> | Y11  | 28                      | 32   | 80                 | 27.8                    | 32   | 300                | 28.1                   | 32.4 | 50                 |
| BZX84C 33        | Y12  | 31                      | 35   | 80                 | 30.8                    | 35   | 325                | 31.1                   | 35.4 | 55                 |

V<sub>F</sub> Forward Voltage = 0.9 V Maximum @ I<sub>F</sub> = 10 mA for all BZX 84 series

| Device     | V <sub>R</sub><br>(V) | I <sub>R</sub><br>(µA) | CAP*<br>(pF) | D <sub>VZ</sub> / D <sub>t</sub> @ 5.0 mA(mV/k) |        |
|------------|-----------------------|------------------------|--------------|-------------------------------------------------|--------|
|            |                       |                        |              | MIN                                             | MAX    |
| BZX84C 3V3 | 1.0                   | 5.0                    | 450          | - 3.5                                           | 0.0    |
| BZX84C 3V6 | 1.0                   | 5.0                    | 450          | - 3.5                                           | 0.0    |
| BZX84C 3V9 | 1.0                   | 5.0                    | 450          | - 3.5                                           | 0.0    |
| BZX84C 4V3 | 1.0                   | 5.0                    | 450          | - 3.5                                           | 0.0    |
| BZX84C 4V7 | 2.0                   | 3                      | 260          | - 3.5                                           | + 0.2  |
| BZX84C 5V1 | 2.0                   | 2                      | 225          | - 2.7                                           | + 1.2  |
| BZX84C 5V6 | 2.0                   | 1                      | 200          | - 2.0                                           | + 2.5  |
| BZX84C 6V2 | 4.0                   | 3                      | 185          | + 0.4                                           | + 3.7  |
| BZX84C 6V8 | 4.0                   | 2                      | 155          | + 1.2                                           | + 4.5  |
| BZX84C 7V5 | 5.0                   | 1                      | 140          | + 2.5                                           | + 5.3  |
| BZX84C 8V2 | 5.0                   | 0.7                    | 135          | + 3.2                                           | + 6.2  |
| BZX84C 9V1 | 6.0                   | 0.5                    | 130          | + 3.8                                           | + 7.0  |
| BZX84C 10  | 7.0                   | 0.2                    | 130          | + 4.5                                           | + 8.0  |
| BZX84C 11  | 8.0                   | 0.1                    | 130          | + 5.4                                           | + 9.0  |
| BZX84C 12  | 8.0                   | 0.1                    | 130          | + 6.0                                           | + 10   |
| BZX84C 13  | 8.0                   | 0.1                    | 120          | + 7.0                                           | + 11   |
| BZX84C 15  | 10.5                  | 0.05                   | 110          | + 9.2                                           | + 13   |
| BZX84C 16  | 11.2                  | 0.05                   | 105          | + 10.4                                          | + 14   |
| BZX84C 18  | 12.6                  | 0.05                   | 100          | + 12.4                                          | + 16   |
| BZX84C 20  | 14                    | 0.05                   | 85           | + 14.4                                          | + 18   |
| BZX84C 22  | 15.4                  | 0.05                   | 85           | + 16.4                                          | + 20   |
| BZX84C 24  | 16.8                  | 0.05                   | 80           | + 18.4                                          | + 22   |
| BZX84C 27  | 18.9                  | 0.05                   | 70           | + 21.4                                          | + 25.3 |
| BZX84C 30  | 21                    | 0.05                   | 70           | + 24.4                                          | + 29.4 |
| BZX84C 33  | 23.1                  | 0.05                   | 70           | + 27.4                                          | + 33.4 |


\*Capacitance @ VR = 0.0 volts; Frequency = 1.0 megahertz.

Zeners (BZX84C 3V3 - BZX84C 33)


# Zeners (BZX84C 3V3 - BZX84C 33)

(continued)


## Typical Characteristics

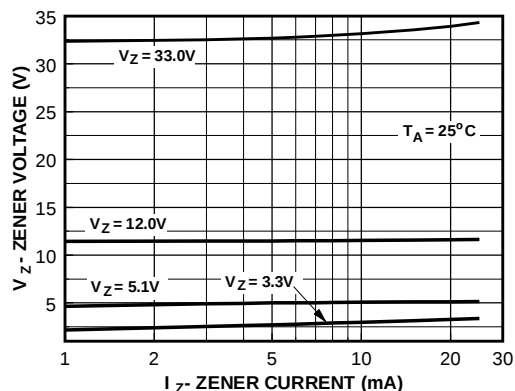


Zener Current vs. Zener Voltage

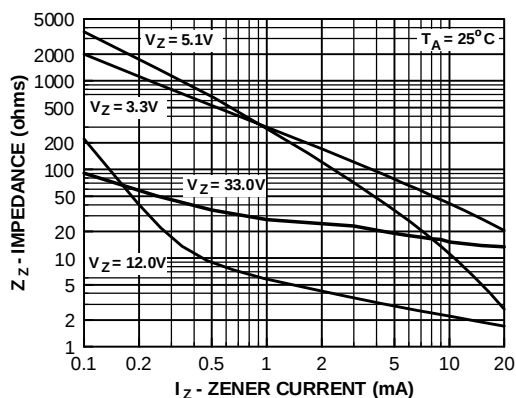


Zener Current vs. Zener Impedance

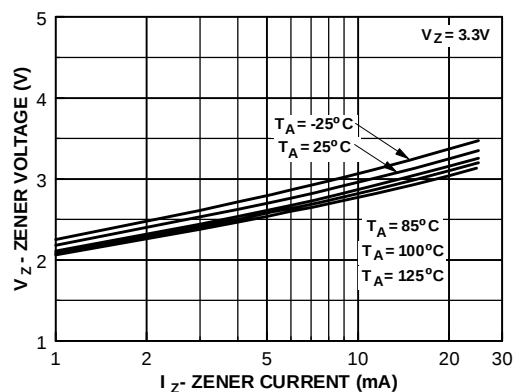


3.3 Zener Voltage vs. Temperature

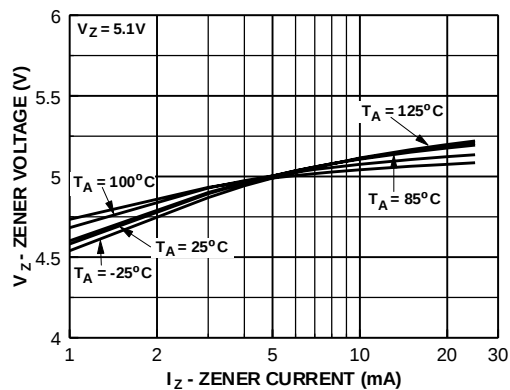

5.1 Zener Voltage vs. Temperature

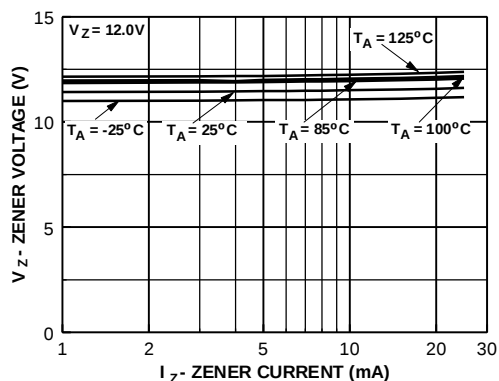

12 Zener Voltage vs. Zener Temperature

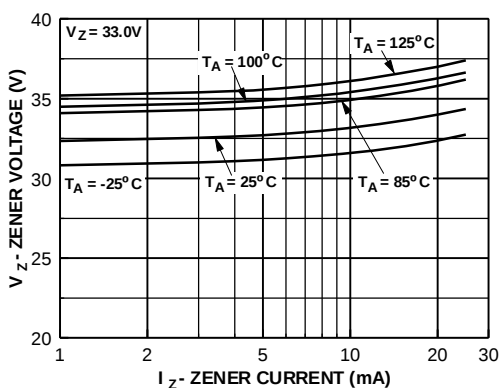

33 Zener Voltage vs. Zener Temperature

## TRADEMARKS

The following are registered and unregistered trademarks Fairchild Semiconductor owns or is authorized to use and is not intended to be an exhaustive list of all such trademarks.

|                      |                     |                     |                 |      |
|----------------------|---------------------|---------------------|-----------------|------|
| ACEx™                | FAST®               | OPTOLOGIC™          | SMART START™    | VCX™ |
| Bottomless™          | FASTr™              | OPTOPLANAR™         | STAR*POWER™     |      |
| CoolFET™             | FRFET™              | PACMAN™             | Stealth™        |      |
| CROSSVOLT™           | GlobalOptoisolator™ | POP™                | SuperSOT™-3     |      |
| DenseTrench™         | GTO™                | Power247™           | SuperSOT™-6     |      |
| DOME™                | HiSeC™              | PowerTrench®        | SuperSOT™-8     |      |
| EcoSPARK™            | ISOPLANAR™          | QFET™               | SyncFET™        |      |
| E <sup>2</sup> CMOS™ | LittleFET™          | QS™                 | TinyLogic™      |      |
| EnSigna™             | MicroFET™           | QT Optoelectronics™ | TruTranslation™ |      |
| FACT™                | MicroPak™           | Quiet Series™       | UHC™            |      |
| FACT Quiet Series™   | MICROWIRE™          | SILENT SWITCHER®    | UltraFET®       |      |

STAR\*POWER is used under license

## DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

## LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, or (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

## PRODUCT STATUS DEFINITIONS

### Definition of Terms

| Datasheet Identification | Product Status         | Definition                                                                                                                                                                                                            |
|--------------------------|------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Advance Information      | Formative or In Design | This datasheet contains the design specifications for product development. Specifications may change in any manner without notice.                                                                                    |
| Preliminary              | First Production       | This datasheet contains preliminary data, and supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice in order to improve design. |
| No Identification Needed | Full Production        | This datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice in order to improve design.                                                       |
| Obsolete                 | Not In Production      | This datasheet contains specifications on a product that has been discontinued by Fairchild semiconductor. The datasheet is printed for reference information only.                                                   |



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.