


# Low noise and low drop voltage regulator with shutdown function

Datasheet - production data



**SOT23-5L**

## Features

- Output current up to 150 mA
- Low-dropout voltage (350 mV at  $I_{OUT} = 150$  mA)
- Very low quiescent current:
  - 0.1  $\mu$ A in OFF mode and max. 250  $\mu$ A in ON mode at  $I_{OUT} = 0$  mA
- Low output noise:
  - typ. 30  $\mu$ V at  $I_{OUT} = 60$  mA and  $10 \text{ Hz} < f < 80 \text{ kHz}$
- Wide range of output voltages

- Internal current and thermal limit
- Operative input voltage from:
  - $V_{OUT} + 0.5$  to 14 V (for  $V_{OUT} > 2$  V) or from 2.5 V to 14 V (for  $V_{OUT} < 2$  V)

## Description

The LK112 is a low-dropout linear regulator with a built-in electronic switch. The internal switch can be controlled by TTL or CMOS logic levels. The device is on-state when the control pin is pulled to a logic high level. An external capacitor can be connected to the noise bypass pin to reduce the output noise level to 30  $\mu$ Vrms. An internal PNP pass transistor is used to achieve a low-dropout voltage. The LK112 has a very low quiescent current in on mode while in off mode  $I_q$  is reduced below 100 nA max. The internal thermal shutdown circuitry limits the junction temperature below 150 °C. Load current is internally monitored and the device shuts down in the presence of a short-circuit or overcurrent condition on the output.

**Table 1. Device summary**

| Order codes | Output voltages |
|-------------|-----------------|
| LK112M15TR  | 1.5V            |
| LK112M18TR  | 1.8V            |
| LK112M25TR  | 2.5V            |
| LK112M33TR  | 3.3V            |
| LK112M50TR  | 5.0V            |
| LK112M55TR  | 5.5V            |
| LK112M60TR  | 6.0V            |
| LK112M80TR  | 8.0V            |

Contents

1      **Diagram ..... 3**

2      **Pin configuration ..... 4**

3      **Maximum ratings ..... 5**

4      **Electrical characteristics ..... 6**

5      **Typical characteristics ..... 7**

6      **Package mechanical data ..... 13**


7      **Packaging mechanical data ..... 15**

8      **Revision history ..... 17**



# 1 Diagram

Figure 1. Schematic diagram

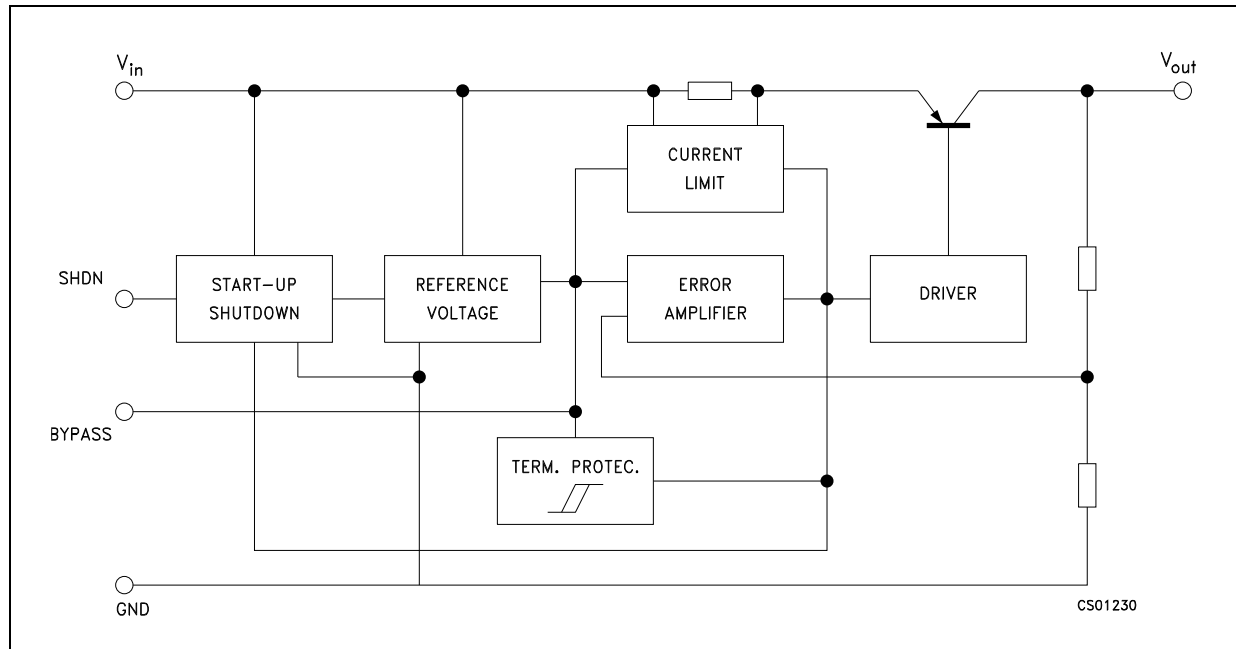

## 2 Pin configuration

Figure 2. Pin connection (top view)

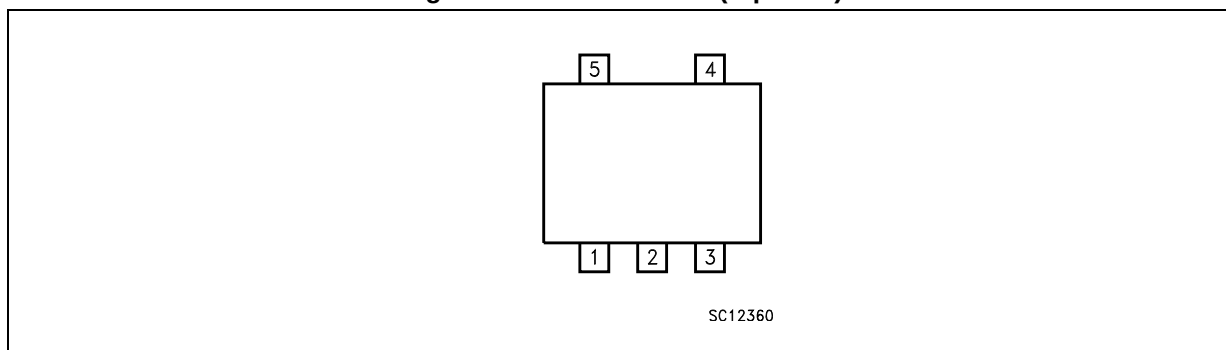


Table 2. Pin description

| Pin n° | Symbol | Note                                                                                                                                                |
|--------|--------|-----------------------------------------------------------------------------------------------------------------------------------------------------|
| 1      | SHDN   | Shutdown input disables the regulator when it is connected to GND or to positive voltage less than 0.6 V                                            |
| 2      | GND    | Ground pin internally connected to the die attach flag to decrease the total thermal resistance and increase the package ability to dissipate power |
| 3      | Bypass | Bypass pin with 0.1 $\mu$ F to improve the noise performance                                                                                        |
| 4      | OUT    | Output port                                                                                                                                         |
| 5      | IN     | Input port                                                                                                                                          |

### 3 Maximum ratings

**Table 3. Absolute maximum ratings**

| Symbol     | Parameter                            | Value              | Unit |
|------------|--------------------------------------|--------------------|------|
| $V_I$      | DC input voltage                     | 16                 | V    |
| $V_{SHDN}$ | DC input voltage                     | 16                 | V    |
| $I_O$      | Output current                       | Internally limited |      |
| $T_{STG}$  | Storage temperature range            | -55 to 150         | °C   |
| $T_{OP}$   | Operating junction temperature range | -40 to 125         | °C   |

**Table 4. Thermal data**

| Symbol     | Parameter                           | SOT23-5L | Unit |
|------------|-------------------------------------|----------|------|
| $R_{thJC}$ | Thermal resistance junction-case    | 81       | °C/W |
| $R_{thJA}$ | Thermal resistance junction-ambient | 255      | °C/W |

## 4 Electrical characteristics

$T_J = 25\text{ }^{\circ}\text{C}$ ,  $V_{IN} = V_{OUT} + 1\text{ V}$ ,  $I_{OUT} = 0\text{ mA}$ ,  $V_{SHDN} = 1.8\text{ V}$ ,  $C_I = 1\text{ }\mu\text{F}$ ,  $C_O = 2.2\text{ }\mu\text{F}$ ,  $C_{BYPASS} = 0.1\text{ }\mu\text{F}$  unless otherwise specified.

**Table 5. LK112 electrical characteristics**

| Symbol           | Parameter                              | Test conditions                                                                                                                                                 | Min. | Typ. | Max. | Unit                   |
|------------------|----------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------|------|------|------|------------------------|
| $I_q$            | Quiescent current                      | On mode (except $I_{SHDN}$ )                                                                                                                                    |      | 175  | 250  | $\mu\text{A}$          |
|                  |                                        | Off mode, $V_I = 8\text{ V}$ , $V_{SHDN} = 0\text{ V}$                                                                                                          |      | 0    | 0.1  | $\mu\text{A}$          |
| $V_O$            | Output voltage                         | $I_O = 30\text{ mA}$                                                                                                                                            | -2   |      | +2   | %                      |
| $\Delta V_O$     | Line regulation                        | $V_I = V_O + 1\text{ V}$ to $V_O + 6\text{ V}$ , $V_O \leq 5.6\text{ V}$                                                                                        |      | 0.7  | 20   | mV                     |
|                  |                                        | $V_I = V_O + 1\text{ V}$ to $V_O + 6\text{ V}$ , $V_O > 5.6\text{ V}$                                                                                           |      | 0.8  | 40   | mV                     |
| $\Delta V_O$     | Load regulation                        | $I_O = 1$ to $60\text{ mA}$                                                                                                                                     |      | 15   | 30   | mV                     |
|                  |                                        | $I_O = 1$ to $150\text{ mA}$                                                                                                                                    |      | 25   | 90   | mV                     |
| $V_d$            | Dropout voltage                        | $I_O = 60\text{ mA}$ <sup>(1)</sup>                                                                                                                             |      | 0.17 | 0.24 | V                      |
|                  |                                        | $I_O = 150\text{ mA}$ <sup>(1)</sup>                                                                                                                            |      | 0.29 | 0.35 | V                      |
| $I_O$            | Output current limit                   |                                                                                                                                                                 | 150  |      |      | mA                     |
| SVR              | Supply voltage rejection               | $V_I = V_O + 1.5\text{ V}$ , $C_{BYP} = 0.1\text{ }\mu\text{F}$<br>$C_O = 10\text{ }\mu\text{F}$ , $f = 400\text{ Hz}$ , $I_O = 30\text{ mA}$                   |      | 55   |      | dB                     |
| eN               | Output noise voltage                   | $B = 10\text{ Hz}$ to $80\text{ kHz}$ , $C_{BYP} = 0.1\text{ }\mu\text{F}$<br>$C_O = 10\text{ }\mu\text{F}$ , $V_I = V_O + 1.5\text{ V}$ , $I_O = 60\text{ mA}$ |      | 30   |      | $\mu\text{Vrms}$       |
| $I_{SHDN}$       | Shutdown input current                 | $V_{SHDN} = 1.8\text{ V}$ , output on                                                                                                                           |      | 12   | 35   | $\mu\text{A}$          |
| $V_{SHDN}$       | Shutdown input logic                   | Output on                                                                                                                                                       | 1.8  |      |      | V                      |
|                  |                                        | Output off                                                                                                                                                      |      |      | 0.6  |                        |
| $\Delta V_O/T_J$ | Output voltage temperature coefficient | $I_O = 10\text{ mA}$                                                                                                                                            |      | 0.09 |      | mV/ $^{\circ}\text{C}$ |

1. For versions with output voltage more than 2.1 V only.

**Note:** For version with output voltage less than 2 V,  $V_{IN} = 2.4\text{ V}$ .

# 5 Typical characteristics

Unless otherwise specified,  $T_J = 25\text{ }^{\circ}\text{C}$ ,  $C_I = 1\text{ }\mu\text{F}$ ,  $C_O = 2.2\text{ }\mu\text{F}$ ,  $C_{BYP} = 100\text{ nF}$

Figure 3. Output voltage vs. temperature ( $V_O = 2.5\text{V}$ )

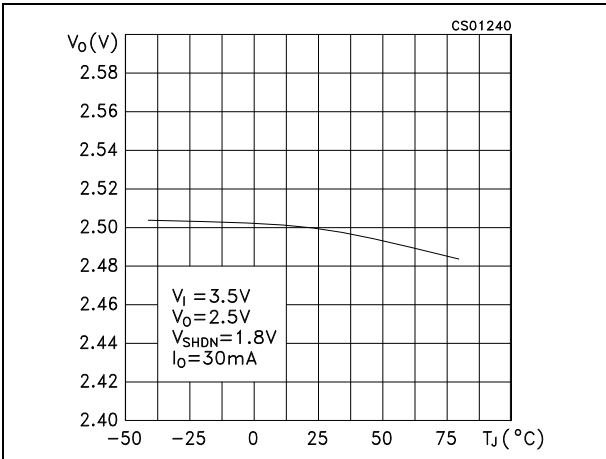


Figure 4. Output voltage vs. temperature ( $V_O = 3.8\text{V}$ )

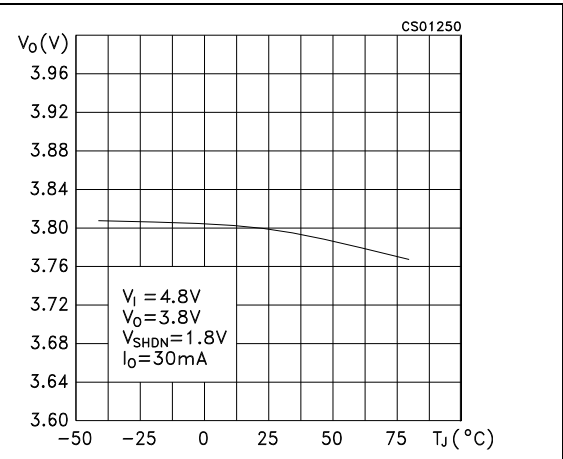


Figure 5. Line regulation vs. temperature

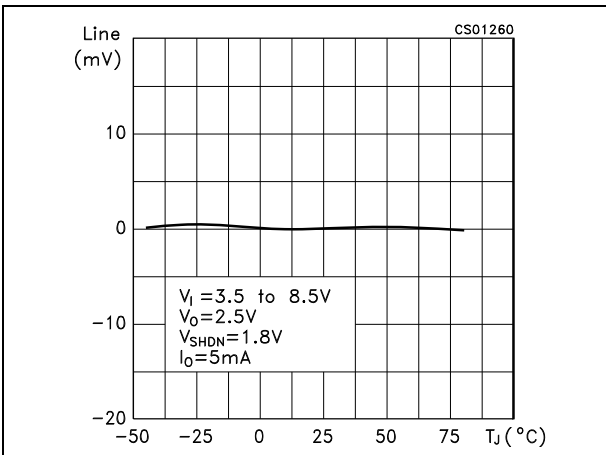


Figure 6. Load regulation vs. temperature

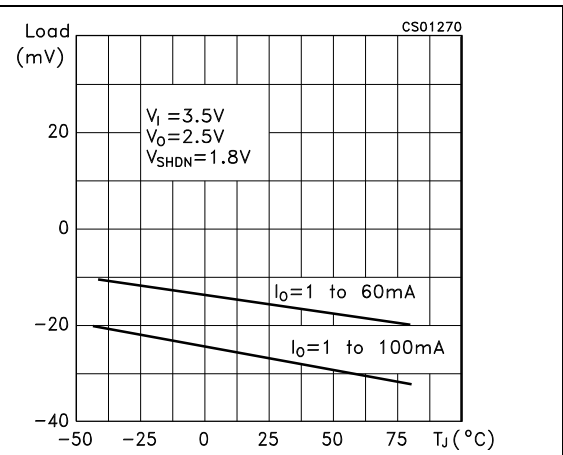


Figure 7. Dropout voltage vs. temperature

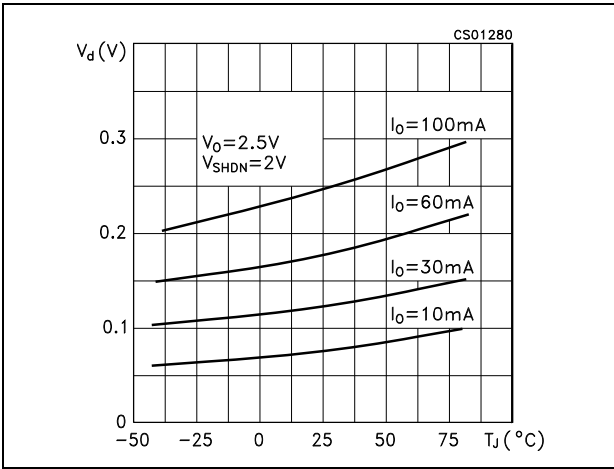


Figure 8. Short-circuit current vs. dropout voltage

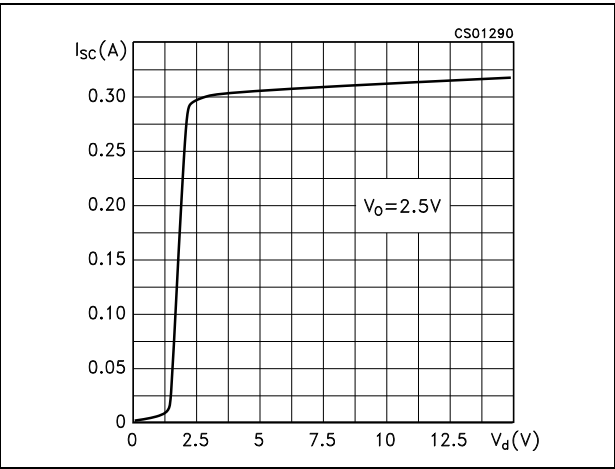


Figure 9. Output voltage vs. input voltage

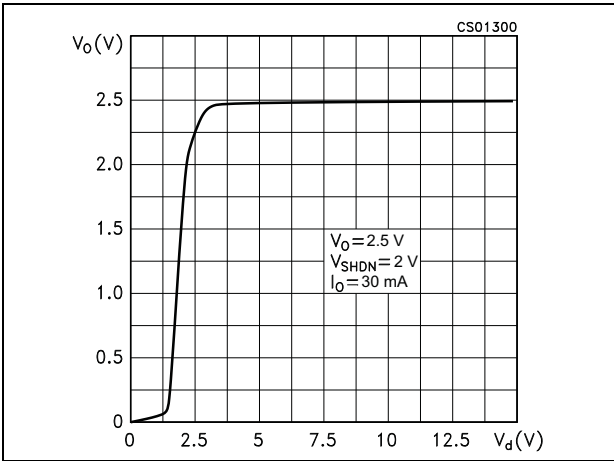


Figure 10. Shutdown voltage vs. temperature

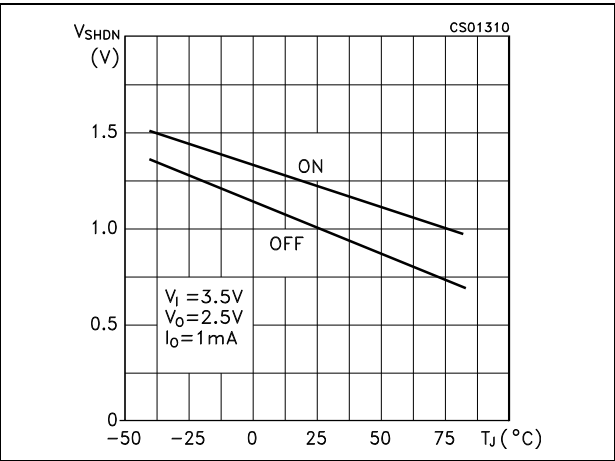


Figure 11. Shutdown current vs. shutdown voltage

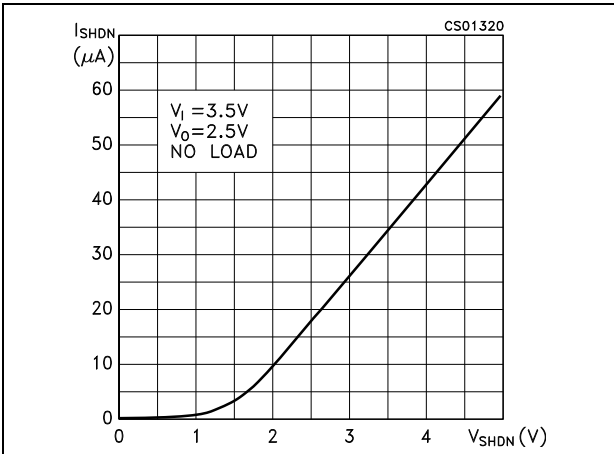


Figure 12. Supply voltage rejection vs. temperature ( $V_o = 2.5V$ )

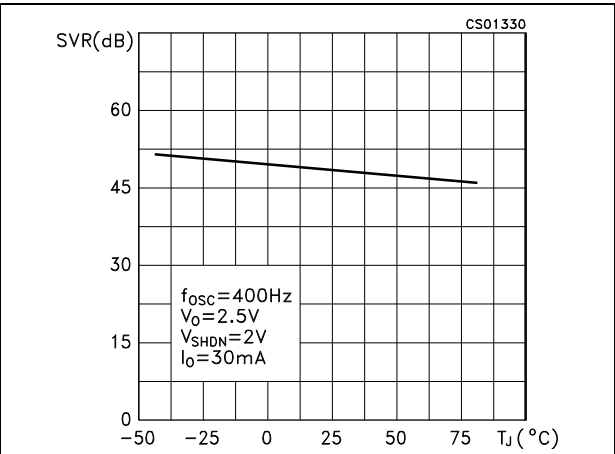




Figure 13. Supply voltage rejection vs. output current

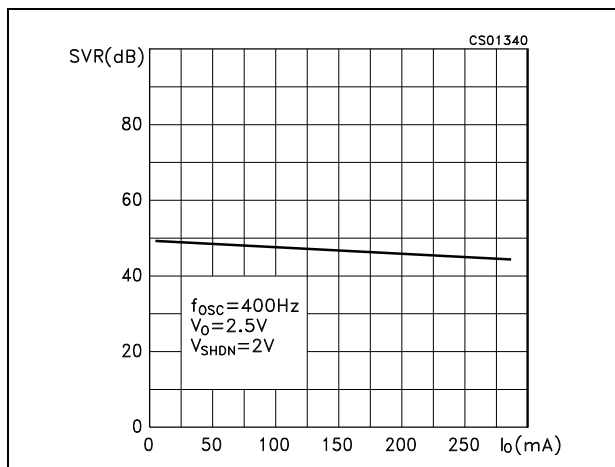


Figure 14. Supply voltage rejection vs. frequency

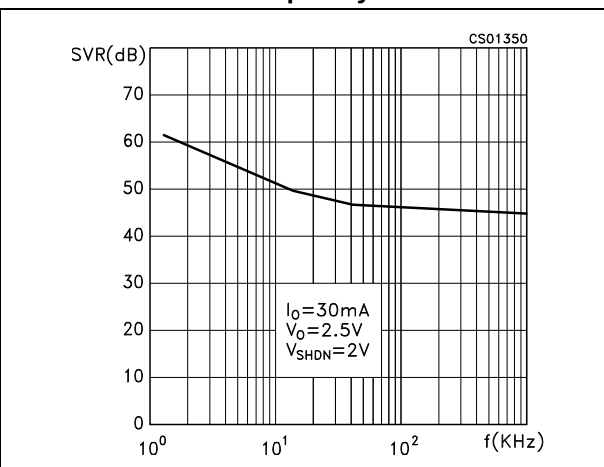
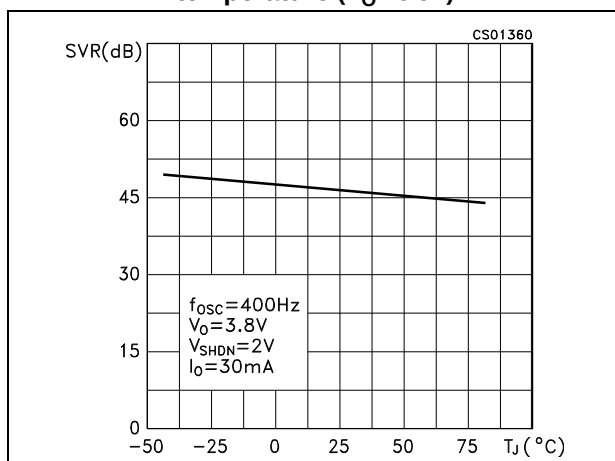
Figure 15. Supply voltage rejection vs. temperature ( $V_O=3.8\text{V}$ )

Figure 16. Quiescent current vs. temperature

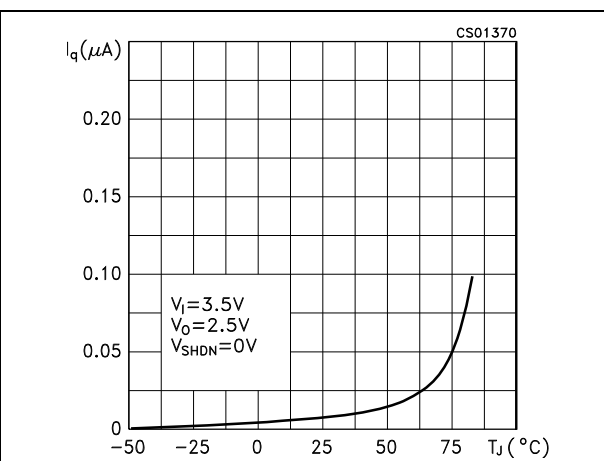


Figure 17. Quiescent current vs. input voltage

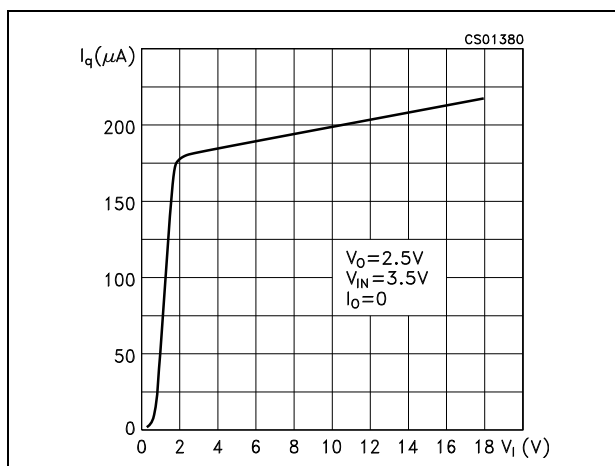


Figure 18. Quiescent current vs. shutdown voltage

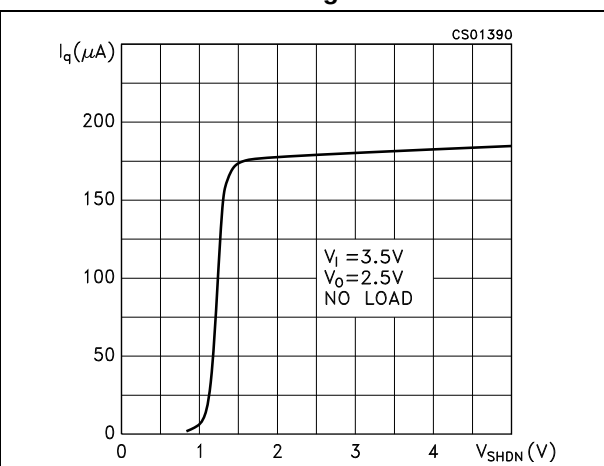


Figure 19. Quiescent current vs. output current

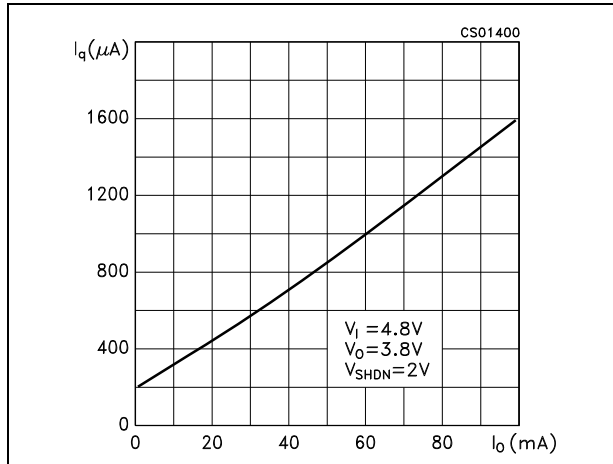


Figure 20. Reverse current vs. reverse voltage

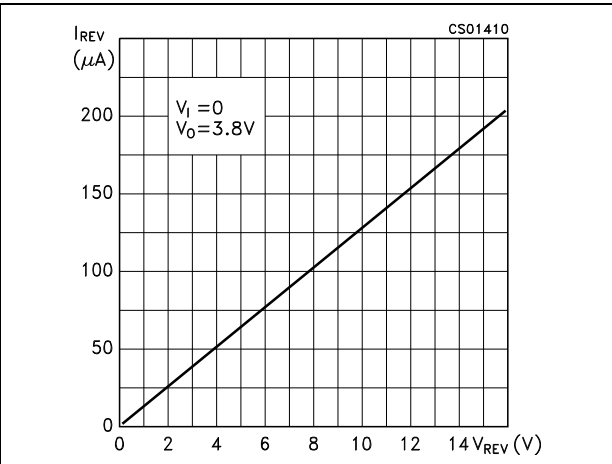


Figure 21. Stability

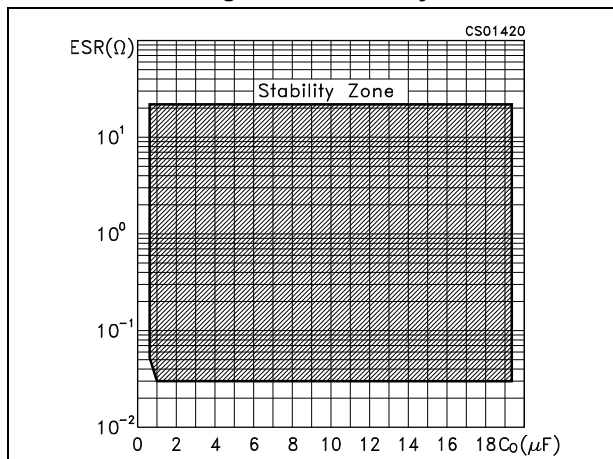


Figure 22. Noise spectrum




Figure 23. Start-up transient ( $C_{BYP} = 10$  nF)Figure 24. Start-up transient ( $C_{BYP} = 100$  nF)





Figure 25. Line transient ( $C_O = 100 \mu\text{F}$ )Figure 26. Line transient ( $C_O = 10 \mu\text{F}$ )Figure 27. Line transient ( $C_O = 1 \mu\text{F}$ )Figure 28. Load transient ( $C_O = 2.2 \mu\text{F}$ ,  $C_{\text{BYP}} = 10 \text{ nF}$ )

Figure 29. Load transient ( $C_O = 10\ \mu\text{F}$ ,  
 $C_{BYP} = 100\ \text{nF}$ )





Figure 30. Load transient ( $V_O = 3.8\text{V}$ )

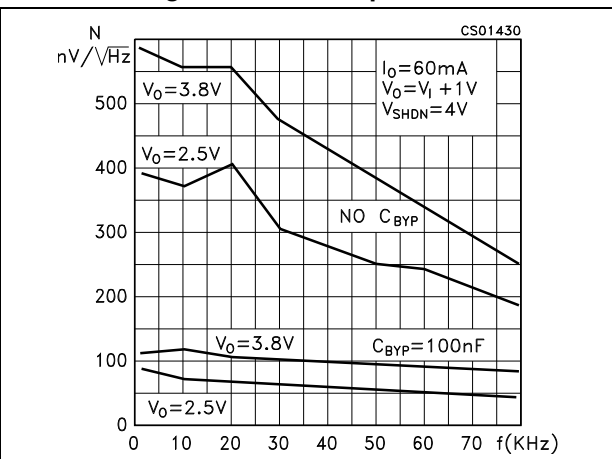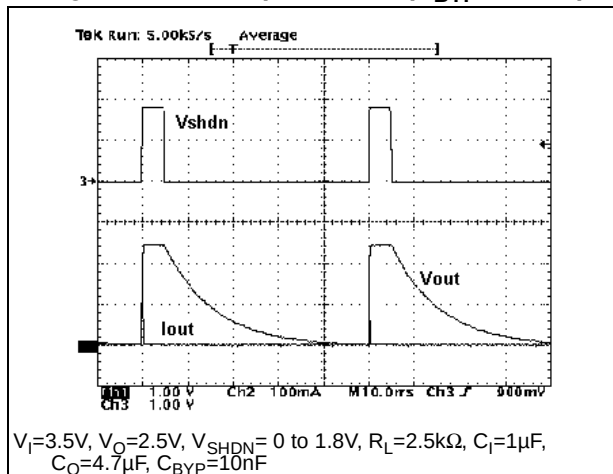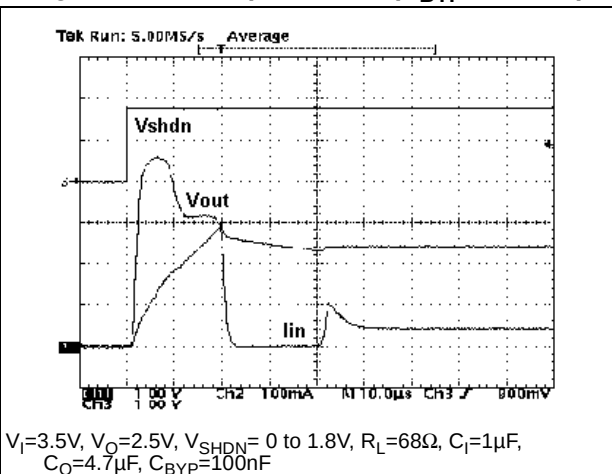
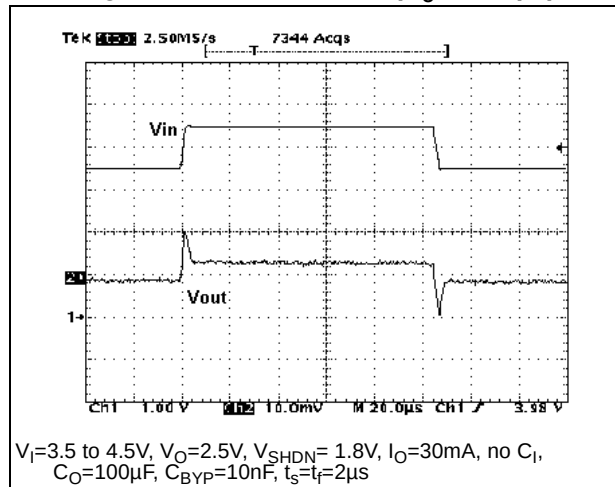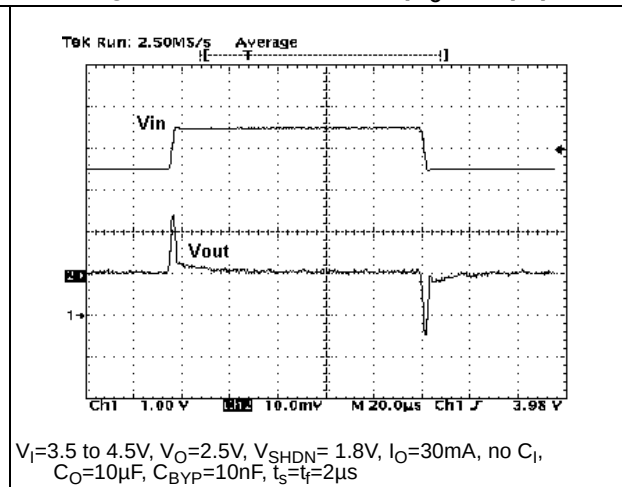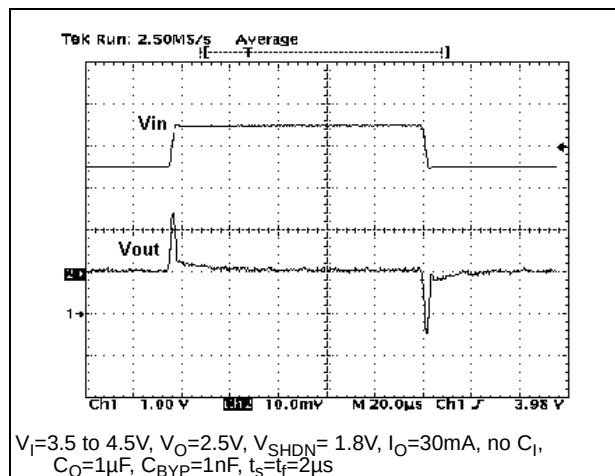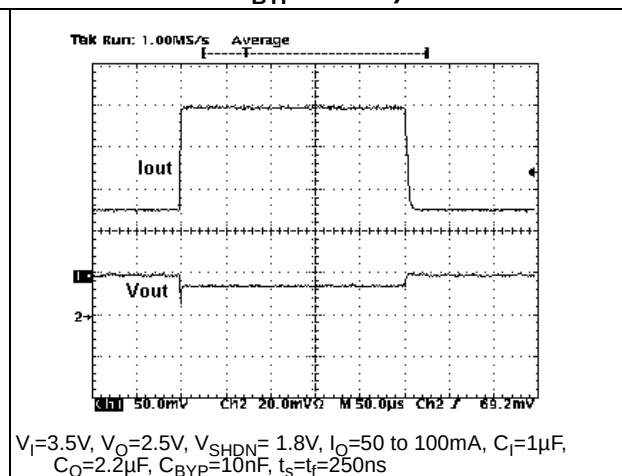
## 6 Package mechanical data

In order to meet environmental requirements, ST offers these devices in different grades of ECOPACK® packages, depending on their level of environmental compliance. ECOPACK® specifications, grade definitions and product status are available at: [www.st.com](http://www.st.com). ECOPACK® is an ST trademark.

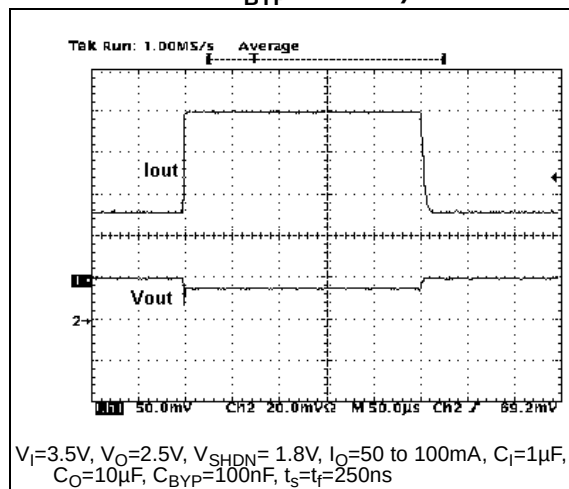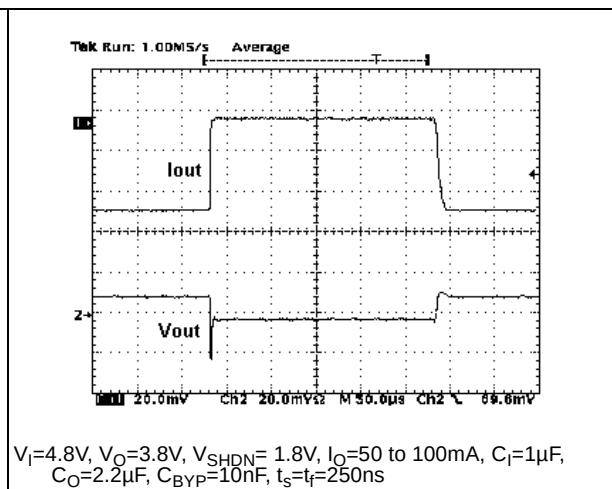Figure 31.SOT23-5L mechanical drawings


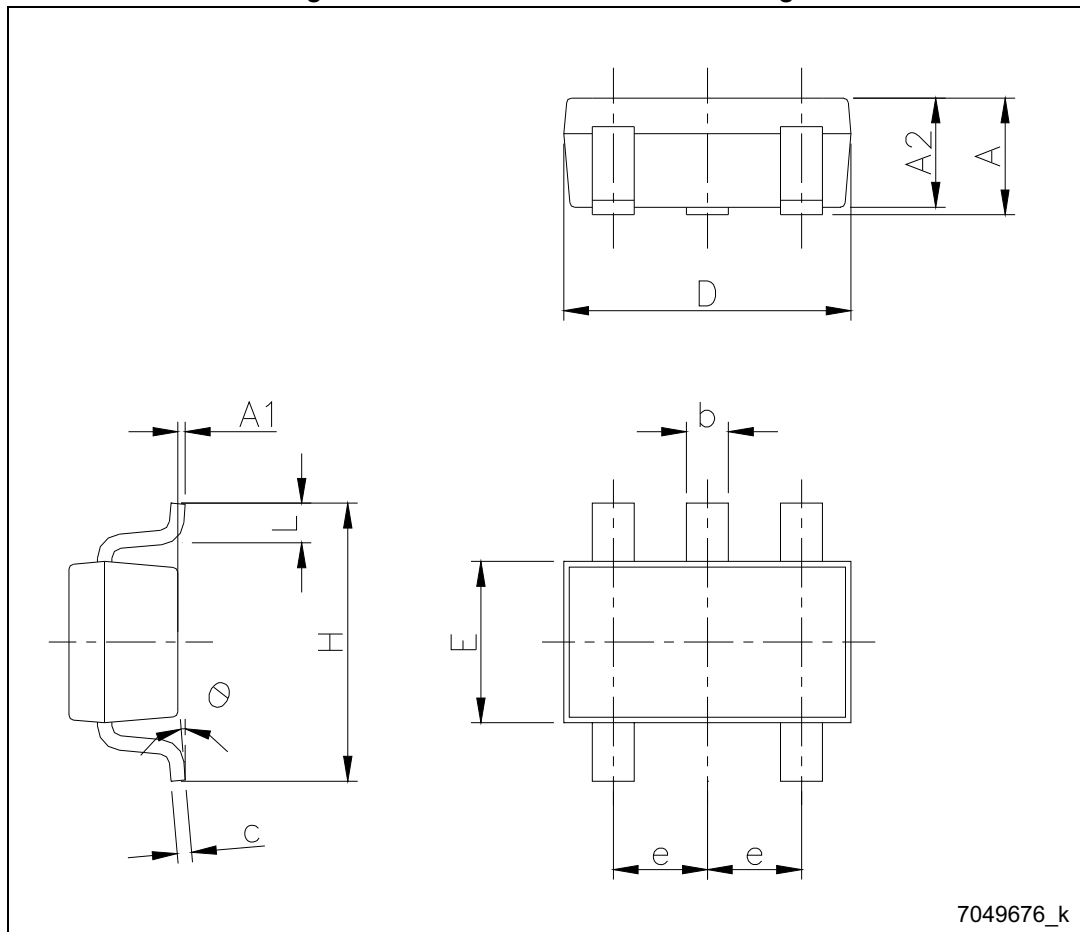


Table 6. SOT23-5L mechanical data

| Dim. | mm   |      |      |
|------|------|------|------|
|      | Min. | Typ. | Max. |
| A    | 0.90 |      | 1.45 |
| A1   | 0    |      | 0.15 |
| A2   | 0.90 |      | 1.30 |
| b    | 0.30 |      | 0.50 |
| c    | 2.09 |      | 0.20 |
| D    |      | 2.95 |      |
| E    |      | 1.60 |      |
| e    |      | 0.95 |      |
| H    |      | 2.80 |      |
| L    | 0.30 |      | 0.60 |
| θ    | 0    |      | 8    |

Figure 32. SOT23-5L recommended footprint (dimensions in mm)

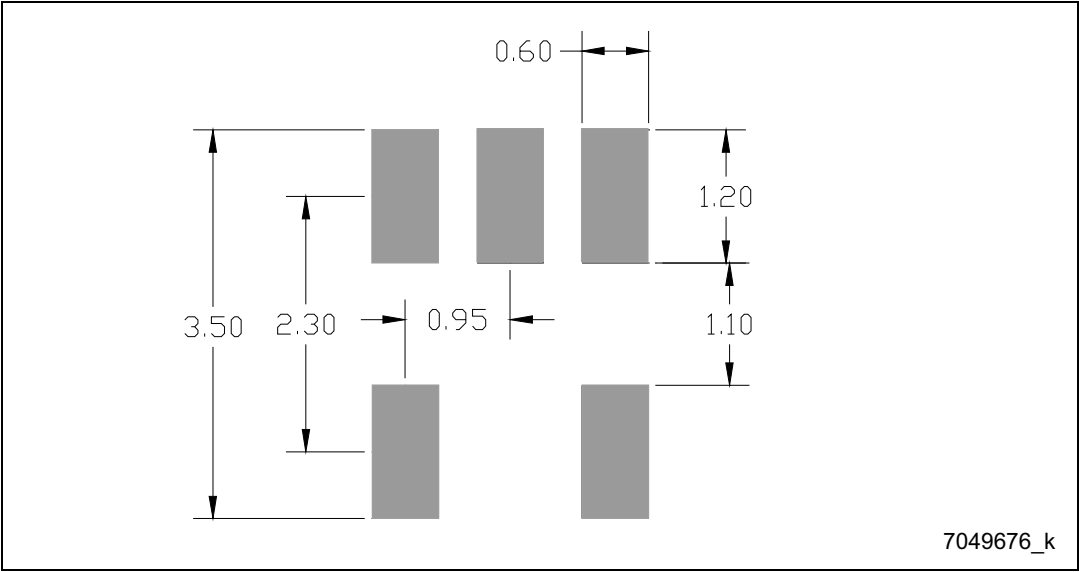

## 7 Packaging mechanical data

Figure 33. Tape and reel SOT23-5L mechanical drawings

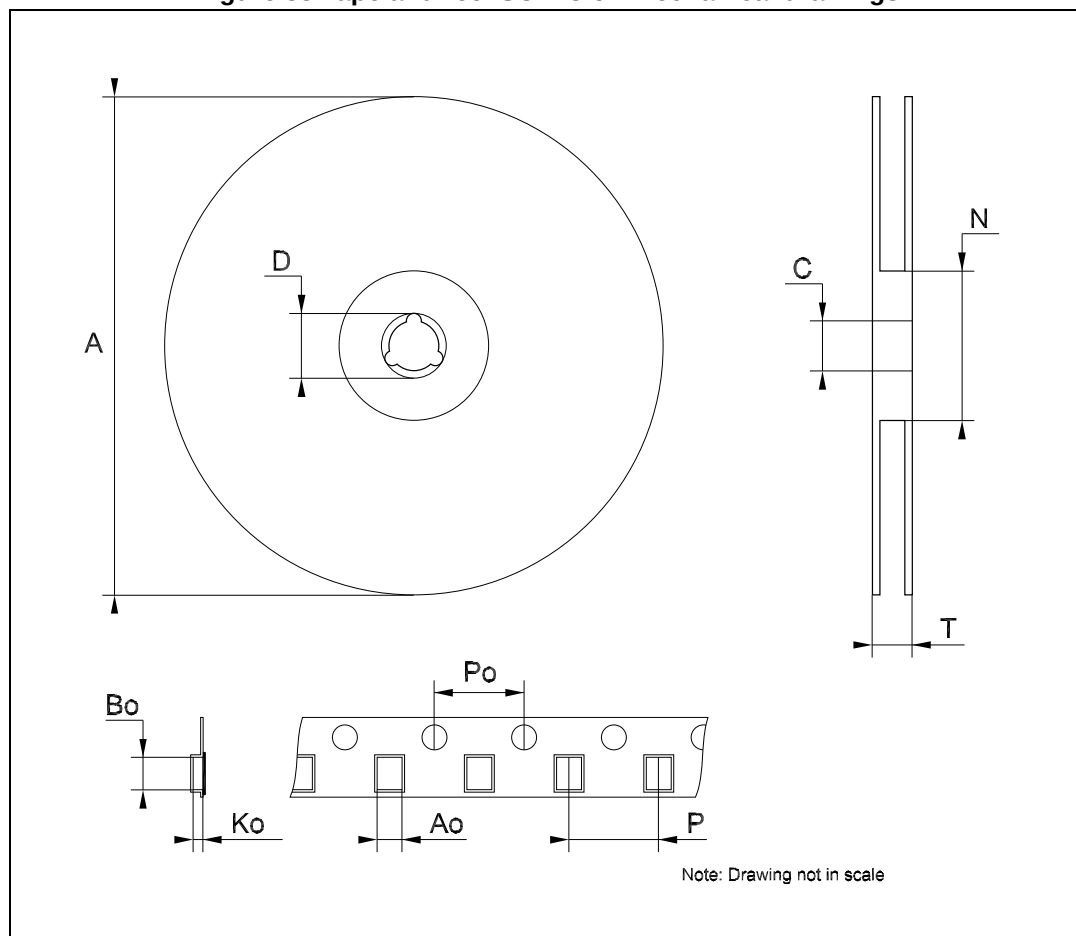


Figure 34. Tape and reel SOT23-5L mechanical data

| Dim. | mm   |      |      |
|------|------|------|------|
|      | Min. | Typ. | Max. |
| A    |      |      | 180  |
| C    | 12.8 | 13.0 | 13.2 |
| D    | 20.2 |      |      |
| N    | 60   |      |      |
| T    |      |      | 14.4 |
| Ao   | 3.13 | 3.23 | 3.33 |
| Bo   | 3.07 | 3.17 | 3.27 |
| Ko   | 1.27 | 1.37 | 1.47 |
| Po   | 3.9  | 4.0  | 4.1  |
| P    | 3.9  | 4.0  | 4.1  |



## 8 Revision history

**Table 7. Document revision history**

| Date        | Revision | Changes                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|-------------|----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 31-Jan-2005 | 8        | Change maturity code.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| 13-Jun-2006 | 9        | Order codes updated and new template.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| 17-Oct-2006 | 10       | The T <sub>OP</sub> value on table 2 has been updated.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| 18-Jul-2007 | 11       | Add <a href="#">Table 1</a> in cover page.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| 21-Sep-2007 | 12       | Features updated.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| 11-Dec-2007 | 13       | Modified: <a href="#">Table 1</a> .                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| 12-Feb-2008 | 14       | Modified: <a href="#">Table 1</a> .                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| 10-Jul-2008 | 15       | Modified: <a href="#">Table 1</a> and <a href="#">Table 1 on page 1</a> .                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| 28-Feb-2011 | 16       | Modified: <a href="#">Table 1</a> .                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| 24-Apr-2014 | 17       | <p>Changed the part number LK112xx to LK112.</p> <p>Updated the Title in cover page and <a href="#">Table 1: Device summary</a>.</p> <p>Updated the features and description in cover page, <a href="#">Table 2: Pin description</a>, <a href="#">Figure 3: Output voltage vs. temperature (VO= 2.5V)</a>, <a href="#">Figure 4: Output voltage vs. temperature (VO= 3.8V)</a>, <a href="#">Section 5: Typical characteristics</a>, <a href="#">Section 6: Package mechanical data</a>.</p> <p>Added <a href="#">Section 7: Packaging mechanical data</a>.</p> <p>Minor text changes.</p> |

**Please Read Carefully:**

Information in this document is provided solely in connection with ST products. STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, modifications or improvements, to this document, and the products and services described herein at any time, without notice.

All ST products are sold pursuant to ST's terms and conditions of sale.

Purchasers are solely responsible for the choice, selection and use of the ST products and services described herein, and ST assumes no liability whatsoever relating to the choice, selection or use of the ST products and services described herein.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted under this document. If any part of this document refers to any third party products or services it shall not be deemed a license grant by ST for the use of such third party products or services, or any intellectual property contained therein or considered as a warranty covering the use in any manner whatsoever of such third party products or services or any intellectual property contained therein.

**UNLESS OTHERWISE SET FORTH IN ST'S TERMS AND CONDITIONS OF SALE ST DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY WITH RESPECT TO THE USE AND/OR SALE OF ST PRODUCTS INCLUDING WITHOUT LIMITATION IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION), OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.**

**ST PRODUCTS ARE NOT DESIGNED OR AUTHORIZED FOR USE IN: (A) SAFETY CRITICAL APPLICATIONS SUCH AS LIFE SUPPORTING, ACTIVE IMPLANTED DEVICES OR SYSTEMS WITH PRODUCT FUNCTIONAL SAFETY REQUIREMENTS; (B) AERONAUTIC APPLICATIONS; (C) AUTOMOTIVE APPLICATIONS OR ENVIRONMENTS, AND/OR (D) AEROSPACE APPLICATIONS OR ENVIRONMENTS. WHERE ST PRODUCTS ARE NOT DESIGNED FOR SUCH USE, THE PURCHASER SHALL USE PRODUCTS AT PURCHASER'S SOLE RISK, EVEN IF ST HAS BEEN INFORMED IN WRITING OF SUCH USAGE, UNLESS A PRODUCT IS EXPRESSLY DESIGNATED BY ST AS BEING INTENDED FOR "AUTOMOTIVE, AUTOMOTIVE SAFETY OR MEDICAL" INDUSTRY DOMAINS ACCORDING TO ST PRODUCT DESIGN SPECIFICATIONS. PRODUCTS FORMALLY ESCC, QML OR JAN QUALIFIED ARE DEEMED SUITABLE FOR USE IN AEROSPACE BY THE CORRESPONDING GOVERNMENTAL AGENCY.**

Resale of ST products with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by ST for the ST product or service described herein and shall not create or extend in any manner whatsoever, any liability of ST.

ST and the ST logo are trademarks or registered trademarks of ST in various countries.

Information in this document supersedes and replaces all information previously supplied.

The ST logo is a registered trademark of STMicroelectronics. All other names are the property of their respective owners.

© 2014 STMicroelectronics - All rights reserved

STMicroelectronics group of companies

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Philippines - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States of America

[www.st.com](http://www.st.com)



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.