

EMC/RFI Filters for Industrial Electronics




- Excellent filter performance for applications with high interference levels
- Filters for two-phase supply up to 2x 520 VAC (P-P) available
- Fast and comfortable snap-in installation on popular TS 35 DIN-rails up to 45 A
- Industrial grade terminal blocks for unsurpassed electrical safety




Performance indicators

Attenuation performance

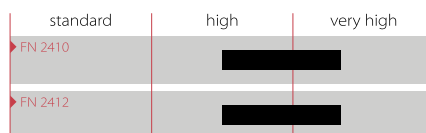

Rated current [A]

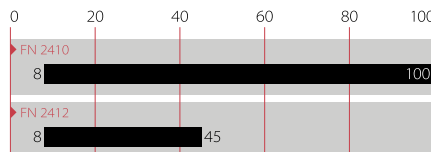

Technical specifications

| | |
|--|--|
| Maximum continuous operating voltage | 1x 250 VAC (FN 2410/FN 2412) 2x 520/300 VAC (FN 2410 H/FN 2412 H) |
| Operating frequency | DC to 400 Hz |
| Rated currents | 8 to 100 A @ 50°C (FN 2410) 8 to 45 A @ 50°C (FN 2412) |
| High potential test voltage | P → E 2000 VAC for 2 sec P → N 1100 VDC for 2 sec P → E 2700 VDC for 2 sec (H types) P → P 2250 VDC for 2 sec (H types) |
| Protection category | IP 20 |
| Overload capability | 4x rated current at switch on, 1.5x rated current for 1 minute, once per hour |
| Temperature range (operation and storage) | -25°C to +100°C (25/100/21) |
| Flammability corresponding to | UL 94 V-2 or better |
| Design corresponding to | UL 1283, CSA 22.2 No. 8 1986, IEC/EN 60939 |
| MTBF @ 50°C/250 V (Mil-HB-217F) | 1,200,000 hours 250,000 hours (H types) |

Approvals




Features and benefits

- FN 2410 filters up to 100 A are designed for traditional chassis mounting
- For extra fast installation, FN 2412 filters up to 45 A can comfortably be snapped-in on popular TS 35 DIN-rails which are common in most electrical cabinets
- Both FN 2410 and FN 2412 are also available as „H versions“. These are ideally suitable for an operation on two phases in a three-phase power network, handling voltages up to 520 VAC
- All filters provide an exceptional conducted attenuation performance, based on chokes with high saturation resistance and excellent thermal behavior. Thus, all filters retain the expected filter performance even in very noisy applications and under full load conditions
- Touch-safe industrial grade terminal blocks provide maximum electrical safety and protect humans from undeliberate contact with live conductors. They help to fulfill the most demanding installation standards


Typical applications

- Small to medium-sized machines and industrial equipment
- High-end single-phase power supplies
- Single-phase variable speed motor drives, inverters and converters
- DIN-rail filter versions are ideal for panel building and electrical cabinets
- Various noisy applications with higher power single-phase or two-phase supply

Typical electrical schematic

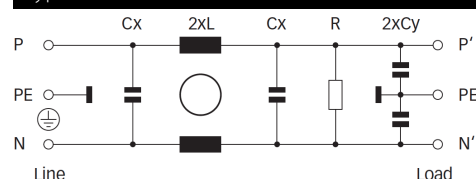

Filter selection table


| Filter | Rated current | Leakage current* | Power loss | Input/Output connections | Weight |
|-------------------------|---------------|--|--------------|---|--------|
| | @ 50°C (40°C) | @ 250 VAC /50 Hz (@ 120 VAC /60 Hz) | @ 25°C/50 Hz | | |
| | [A] | [mA] | [W] |  | [kg] |
| FN 2410-8-44 | 8 (8.8) | 2.60 (1.49) | 2.6 | -44 | 0.4 |
| FN 2410-16-44 | 16 (17.5) | 2.60 (1.49) | 3.5 | -44 | 0.5 |
| FN 2410-25-33 | 25 (27.4) | 2.60 (1.49) | 5.5 | -33 | 0.6 |
| FN 2410-32-33 | 32 (35.0) | 2.60 (1.49) | 5.6 | -33 | 0.7 |
| FN 2410-45-33 | 45 (49.3) | 2.60 (1.49) | 7.4 | -33 | 0.7 |
| FN 2410-60-34 | 60 (65.7) | 2.60 (1.49) | 5.5 | -34 | 1.8 |
| FN 2410-80-34 | 80 (87.6) | 2.60 (1.49) | 9.9 | -34 | 1.8 |
| FN 2410-100-34 | 100 (109.5) | 2.60 (1.49) | 15.4 | -34 | 1.8 |
| FN 2410 H-8-44 | 8 (8.8) | 2.60 (1.49) | 2.6 | -44 | 0.5 |
| FN 2410 H-16-44 | 16 (17.5) | 2.60 (1.49) | 3.5 | -44 | 0.6 |
| FN 2410 H-25-33 | 25 (27.4) | 2.60 (1.49) | 5.5 | -33 | 0.7 |
| FN 2410 H-32-33 | 32 (35.0) | 2.60 (1.49) | 5.6 | -33 | 0.8 |
| FN 2410 H-60-34 | 60 (65.7) | 2.60 (1.49) | 5.5 | -34 | 1.9 |
| FN 2410 H-80-34 | 80 (87.6) | 2.60 (1.49) | 9.9 | -34 | 1.9 |
| FN 2410 H-100-34 | 100 (109.5) | 2.60 (1.49) | 15.4 | -34 | 1.9 |
| | | | | | |
| FN 2412-8-44 | 8 (8.8) | 2.60 (1.49) | 2.6 | -44 | 0.4 |
| FN 2412-16-44 | 16 (17.5) | 2.60 (1.49) | 3.5 | -44 | 0.6 |
| FN 2412-25-33 | 25 (27.4) | 2.60 (1.49) | 5.5 | -33 | 0.7 |
| FN 2412-32-33 | 32 (35.0) | 2.60 (1.49) | 5.6 | -33 | 0.8 |
| FN 2412-45-33 | 45 (49.3) | 2.60 (1.49) | 7.4 | -33 | 0.8 |
| FN 2412 H-8-44 | 8 (8.8) | 2.60 (1.49) | 2.6 | -44 | 0.5 |
| FN 2412 H-16-44 | 16 (17.5) | 2.60 (1.49) | 3.5 | -44 | 0.7 |
| FN 2412 H-25-33 | 25 (27.4) | 2.60 (1.49) | 5.5 | -33 | 0.8 |
| FN 2412 H-32-33 | 32 (35.0) | 2.60 (1.49) | 5.6 | -33 | 0.9 |

* Maximum leakage under normal operating conditions (acc. to IEC60939-3). Note: if the neutral line is interrupted, worst case leakage could reach twice this level.


Typical filter attenuation

Per CISPR 17; A=50 Ω/50 Ω sym; B=50 Ω/50 Ω asym; C=0.1 Ω/100 Ω sym; D=100 Ω/0.1 Ω sym



8 to 45 A types



60 to 100 A types



Mechanical data

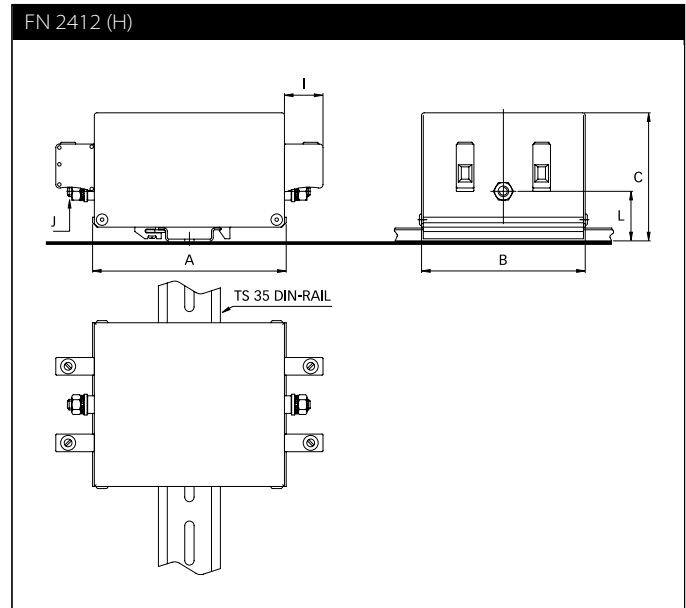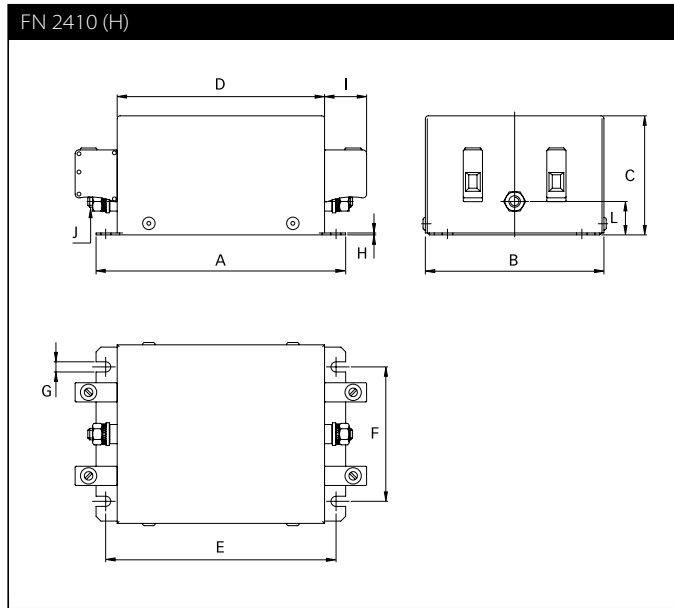

Dimensions

| | FN 2410 | | | | | FN 2412 | | | | | | | |
|-------------------------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| | 8 A | 16 A | 25 A | 32 A | 45 A | 60 A | 80 A | 100 A | 8 A | 16 A | 25 A | 32 A | 45 A |
| A | 130 | 130 | 130 | 130 | 130 | 165 | 165 | 165 | 110 | 110 | 110 | 110 | 110 |
| B | 93 | 93 | 93 | 93 | 93 | 115 | 115 | 115 | 93 | 93 | 93 | 93 | 93 |
| C | 62 | 62 | 76 | 76 | 76 | 100 | 100 | 100 | 73 | 73 | 87 | 87 | 87 |
| D | 108 | 108 | 108 | 108 | 108 | 140 | 140 | 140 | | | | | |
| E | 120 | 120 | 120 | 120 | 120 | 155 | 155 | 155 | | | | | |
| F | 70 | 70 | 70 | 70 | 70 | 90 | 90 | 90 | | | | | |
| G | 5.3 | 5.3 | 5.3 | 5.3 | 5.3 | 5.3 | 5.3 | 5.3 | | | | | |
| H | 1.0 | 1.0 | 1.0 | 1.0 | 1.0 | 1.2 | 1.2 | 1.2 | | | | | |
| I | 22 | 22 | 25 | 25 | 25 | 39 | 39 | 39 | 22 | 22 | 25 | 25 | 25 |
| J | M6 | M6 | M6 | M6 | M6 | M8 | M8 | M8 | M6 | M6 | M6 | M6 | M6 |
| Rec. torque (Nm) | 3.5 - 4.0 | 3.5 - 4.0 | 3.5 - 4.0 | 3.5 - 4.0 | 3.5 - 4.0 | 8.0 - 9.0 | 8.0 - 9.0 | 8.0 - 9.0 | 3.5 - 4.0 | 3.5 - 4.0 | 3.5 - 4.0 | 3.5 - 4.0 | 3.5 - 4.0 |
| L | 17.5 | 17.5 | 31.5 | 31.5 | 31.5 | 39.2 | 39.2 | 39.2 | 28.5 | 28.5 | 42.5 | 42.5 | 42.5 |

All dimensions in mm; 1 inch = 25.4 mm
Tolerances according: ISO 2768-m/EN 22768-m

Filter input/output connector cross sections

| | -33 | -34 | -44 |
|---------------------------|--------------------|--------------------|--------------------|
| | | | |
| Solid wire | 16 mm ² | 35 mm ² | 10 mm ² |
| Flex wire | 10 mm ² | 25 mm ² | 6 mm ² |
| AWG type wire | AWG 6 | AWG 2 | AWG 8 |
| Recommended torque | 1.5-1.8 Nm | 4.0-4.5 Nm | 1.5-1.8 Nm |

Please visit www.schaffner.com to find more details on filter connectors.



Headquarters, global innovation and development

Switzerland

Schaffner Group

Nordstrasse 11
4542 Luterbach
T +41 32 681 66 26
info@schaffner.com
www.schaffner.com



Sales and application centers

China

Schaffner EMC Ltd. Shanghai

T20-3 C, No 565 Chuangye Road,
Pudong district
201201 Shanghai
T +86 21 3813 9500
cschina@schaffner.com
www.schaffner.com.cn

Finland

Schaffner Oy

Sauvonrinne 19 H
08500 Lohja
T +358 50 468 7284
finlandsales@schaffner.com

France

Schaffner EMC S.A.S.

16-20 Rue Louis Rameau
95875 Bezons
T +33 1 34 34 30 60
F +33 1 39 47 02 28
francesales@schaffner.com

Germany

Schaffner Deutschland GmbH

Schoemperlenstrasse 12B
76185 Karlsruhe
T +49 721 56910
F +49 721 569110
germanysales@schaffner.com

India

Schaffner India Pvt. Ltd

REGUS WORLD TRADE CENTRE
WTC, 22nd Floor Unit No 2238, Brigade
Gateway Campus, 26/1, Dr. Rajkumar Road
Malleswaram (W)
560055 Bangalore
T +91 80 67935355
indiasales@schaffner.com

Italy

Schaffner EMC S.r.l.

Via Ticino, 30
20900 Monza (MB)
T +39 039 21 41 070
italysales@schaffner.com

Japan

Schaffner EMC K.K.

1-32-12, Kamiyama, Setagaya-ku
7F Mitsui-seimei Sangenjaya Bldg.
154-0011 Tokyo
T +81 3 5712 3650
F +81 3 5712 3651
japansales@schaffner.com
www.schaffner.jp

Singapore

Schaffner EMC Pte Ltd.

#05-09, Kg Ubi Ind. Estate
408705 Singapore
T +65 6377 3283
F +65 6377 3281
singaporesales@schaffner.com

Spain

Schaffner EMC España

Calle Caléndula 93, Miniparc III, Edificio E
El Soto de Moraleja, Alcobendas
28109 Madrid
T +34 917 912 900
F +34 917 912 901
spainsales@schaffner.com

Sweden

Schaffner EMC AB

Tegeluddsvägen 76, 2tr
115 28 Stockholm
T +46 8 5050 2425
swedensales@schaffner.com
www.schaffner.com

Switzerland

Schaffner EMV AG

Nordstrasse 11
4542 Luterbach
T +41 32 681 66 26
switzerlandsales@schaffner.com

Taiwan R.O.C.

Schaffner EMV Ltd.

20 Floor-2, No 97, Section 1, XinTai 5th Road
22175 XiZhi District New Taipei City 22175
T +886 2 2697 5500
F +886 2 2697 5533
taiwansales@schaffner.com
www.schaffner.com.tw

Thailand

Schaffner EMC Co. Ltd.

Northern Region Industrial Estate
67 Moo 4 Tambon Ban Klang
Amphur Muangng P.O. Box 14
51000 Lamphun
T +66 53 58 11 04
F +66 53 58 10 19
thailandsales@schaffner.com

United Kingdom

Schaffner Ltd.

5 Ashville Way, Molly Millars Lane
Wokingham
RG41 2PL Berkshire
T +44 118 9770070
F +44 118 9792969
uksales@schaffner.com

USA

Schaffner EMC Inc.

52 Mayfield Avenue
08837 Edison, New Jersey
T +1 800 367 5566
T +1 732 225 9533
F +1 732 225 4789
usasales@schaffner.com
www.schaffnerusa.com

Schaffner North America

6722 Thirlane Road
24019 Roanoke, Virginia
T +1 276 228 7943
F +1 276 228 7953

Schaffner North America

823 Fairview Road
24382 Wytheville, Virginia
T +1 276 228 7943
F +1 276 228 7258

To find your local partner within Schaffner's global network: www.schaffner.com

© 2018 Schaffner Group

The content of this document has been carefully checked and understood. However, neither Schaffner nor its subsidiaries assume any liability whatsoever for any errors or inaccuracies of this document and the consequences thereof. Published specifications are subject to change without notice. Product suitability for any area of application must ultimately be determined by the customer. In all cases, products must never be operated outside their published specifications. Schaffner does not guarantee the availability of all published products. This disclaimer shall be governed by substantive Swiss law and resulting disputes shall be settled by the courts at the place of business of Schaffner Holding AG. Latest publications and a complete disclaimer can be downloaded from the Schaffner website. All trademarks recognized.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.