

## Sensor/Actuator cable - SAC-3P-M8MS/ 1,5-542/FR SCO BK - 1406277

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://download.phoenixcontact.com>)



Sensor/Actuator cable, 3-position, PVC, Plug straight M8, on Socket angled M12-SPEEDCON, A-coded, Cable length: 1.5 m



### Key commercial data

|                      |                                                                                                         |
|----------------------|---------------------------------------------------------------------------------------------------------|
| Packing unit         | 1 PCE                                                                                                   |
| GTIN                 | <br>4 046356 797757 |
| Custom tariff number | 85444290                                                                                                |
| Country of origin    | UNITED STATES                                                                                           |

### Technical data

#### Dimensions

|                 |       |
|-----------------|-------|
| Length of cable | 1.5 m |
|-----------------|-------|

#### Ambient conditions

|                                 |                                  |
|---------------------------------|----------------------------------|
| Ambient temperature (operation) | -25 °C ... 90 °C (Plug / socket) |
| Degree of protection            | IP65                             |
|                                 | IP67                             |
|                                 | IP68                             |

#### General

|                       |                                       |
|-----------------------|---------------------------------------|
| Rated current at 40°C | 4 A                                   |
| Rated voltage         | 60 V                                  |
| Number of positions   | 3                                     |
| Contact resistance    | ≤ 5 mΩ                                |
| Insulation resistance | ≥ 100 MΩ                              |
| Standards/regulations | M12 plug-in connector IEC 61076-2-101 |

# Sensor/Actuator cable - SAC-3P-M8MS/ 1,5-542/FR SCO BK - 1406277

## Technical data

### General

|                             |                                             |
|-----------------------------|---------------------------------------------|
|                             | M8 plug-in connector IEC 61076-2-104        |
| Coding                      | A - standard                                |
| Surge voltage category      | II                                          |
| Pollution degree            | 3                                           |
| Insertion/withdrawal cycles | ≥ 100                                       |
| Torque                      | 0.4 Nm (M12 plug-in connector)              |
|                             | 0.2 Nm (M8 plug-in connectors)              |
| Contact material            | CuSn                                        |
| Contact surface material    | Ni/Au                                       |
| Contact carrier material    | TPU GF                                      |
| Material of grip body       | TPU, hardly inflammable, self-extinguishing |
| Material, knurls            | Zinc die-cast, nickel-plated                |
| Sealing material            | NBR                                         |
| Status display              | No                                          |

### Line characteristics

|                                               |                                               |
|-----------------------------------------------|-----------------------------------------------|
| Cable type                                    | PVC yellow 105 °C                             |
| Cable type (abbreviation)                     | 542                                           |
| UL AWM style                                  | 2517 (105°C/300 V)                            |
| AWG signal line                               | 24                                            |
| Core diameter including insulation            | 1.12 mm ±0.03 mm                              |
| Wire colors                                   | brown, blue, black                            |
| Overall twist                                 | 3 wires, twisted                              |
| External sheath, color                        | yellow                                        |
| External cable diameter D                     | 4.1 mm ± 0.2 mm                               |
| Minimum bending radius, flexible installation | 8 x D                                         |
| Cable weight                                  | 21 kg/km                                      |
| Outer sheath, material                        | PVC                                           |
| Material conductor insulation                 | PVC                                           |
| Conductor material                            | Tin-plated Cu litz wires                      |
| Nominal voltage, cabel                        | 300 V                                         |
| Other resistance                              | UV resistant                                  |
| Ambient temperature (operation)               | -30 °C ... 105 °C (cable, fixed installation) |

## Classifications

### ETIM

|          |          |
|----------|----------|
| ETIM 3.0 | EC001855 |
|----------|----------|

## Sensor/Actuator cable - SAC-3P-M8MS/ 1,5-542/FR SCO BK - 1406277

### Classifications

#### ETIM

|          |          |
|----------|----------|
| ETIM 4.0 | EC001855 |
| ETIM 5.0 | EC001855 |

#### UNSPSC

|               |          |
|---------------|----------|
| UNSPSC 11     | 31251501 |
| UNSPSC 12.01  | 31251501 |
| UNSPSC 13.2   | 31251501 |
| UNSPSC 6.01   | 31251501 |
| UNSPSC 7.0901 | 31251501 |

#### eCl@ss

|            |          |
|------------|----------|
| eCl@ss 4.0 | 27060306 |
| eCl@ss 4.1 | 27060306 |
| eCl@ss 5.0 | 27061801 |
| eCl@ss 5.1 | 27061801 |
| eCl@ss 6.0 | 27061801 |
| eCl@ss 7.0 | 27061801 |

### Approvals

#### Approvals

#### Approvals

UL Listed / cUL Listed / cULus Listed

#### Ex Approvals

#### Approvals submitted

#### Approval details

|                                                                                               |     |
|-----------------------------------------------------------------------------------------------|-----|
| UL Listed  |     |
| Nominal current I <sub>N</sub>                                                                | 4 A |

## Sensor/Actuator cable - SAC-3P-M8MS/ 1,5-542/FR SCO BK - 1406277

### Approvals

|                    |       |
|--------------------|-------|
| Nominal voltage UN | 125 V |
|--------------------|-------|

|                                                                                              |       |
|----------------------------------------------------------------------------------------------|-------|
| cUL Listed  |       |
| Nominal current IN                                                                           | 4 A   |
| Nominal voltage UN                                                                           | 125 V |

|                                                                                                |  |
|------------------------------------------------------------------------------------------------|--|
| cULus Listed  |  |
|------------------------------------------------------------------------------------------------|--|

### Accessories

#### Accessories

##### Fuse

Fuse clip - SAC-M12-EXCLIP-F - 1558991



Fuse clip for the socket side of various M12 sensor/actuator connectors prevents plug-in connections being interrupted without using a tool

#### Protection and sealing elements

Sealing cap - PROT-M 8 FS-PA-CHAIN - 1430857



M8 sealing cap made of plastic with fixing band for sensor cables, for M8 plugs

## Sensor/Actuator cable - SAC-3P-M8MS/ 1,5-542/FR SCO BK - 1406277

### Accessories

Screw plug - PROT-M12 MS-PA-CHAIN - 1430899

M12 sealing cap with fixing band, for sensor cables, for free M12 sockets



---

### Tools

Torque screwdriver - TSD 02 SAC - 1208487



Torque screwdriver, with preset torque of 0.2 Nm and 4 mm hexagonal drive for M8 connectors

---

Tool - SAC BIT M8-D10 - 1208461



Nut for assembling sensor/actuator cables with M8 connector and for M8 connectors with QUICKON fast connection technology, for 4 mm hexagonal drive

---

Torque screwdriver - TSD 04 SAC - 1208429



Torque screwdriver, with preset torque of 0.4 Nm and 4 mm hexagonal drive for M12 connectors

---

Torque screwdriver - TSD-M 1,2NM - 1212224



Torque screw driver, accuracy as per EN ISO 6789 standard, adjustable from 0.3 - 1.2 Nm

## Sensor/Actuator cable - SAC-3P-M8MS/ 1,5-542/FR SCO BK - 1406277

### Accessories

Adapter insert - TSD-M SAC-BIT ADAPTER - 1212600



Adapter bit for TSD-M...torque tools, E6.3-1/4" drive with 4 mm hexagon to accommodate SAC bits


Tool - SAC BIT M12-D15 - 1208432



Nut for assembling sensor/actuator cables with M12 connector and for M12 connectors with QUICKON fast connection technology, for 4 mm hexagonal drive


### Drawings

Schematic diagram




Pin assignment M8 plug, 3-pos., view male side

Schematic diagram




Pin assignment M12 socket, 3-pos., A-coded, view female side

Dimensioned drawing



M8 x 1 male plug, straight version


Dimensioned drawing



M12 x 1 socket, angled

## Sensor/Actuator cable - SAC-3P-M8MS/ 1,5-542/FR SCO BK - 1406277

Circuit diagram

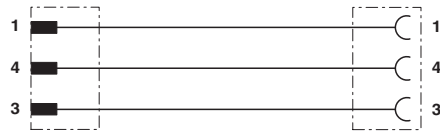

Contact assignment of M8 plugs / M12 sockets



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.