

600 W Half-Bridge LLC evaluation board

EVAL_600W_LLC_12V_C7_D
digital & analog



Table of contents

1

General description

2

Efficiency results

3

Design concept

General

Description:

The "**EVAL_600W_LLC_12V_C7**" - evaluation board shows how to design a Half-Bridge LLC stage of a server SMPS with the target to meet 80+ Titanium standard efficiency requirements. On this purpose there has been applied latest CoolMOS™ technology [IPP60R180C7](#) 600 V power MOSFET on the primary side and OptiMOS™ low voltage power MOSFET in SuperSO8 [BSC010N04LS](#) in the synchronous rectification secondary stage, in combination with QR CoolSET™ [ICE2QR2280Z](#), hi-low side driver [2EDL05N06PF](#), low-side Gate Driver [2EDN7524F](#) and a LLC Controller [ICE2HS01G](#) for the analog or [XMC4200](#) in the digital version.

Summary of features:

- › Output voltage: 12 V
- › Output current: 50 A
- › Efficiency @ 10% load > 95%
- › Peak efficiency @ 50% load > 97,8%



The following variants are available:

- › 600W 12V LLC **analog** version with CoolMOS™ C7, [IPP60R180C7](#), EVAL_600W_LLC_12V_C7
- › 600W 12V LLC **digital** version with CoolMOS™ C7, [IPP60R180C7](#), EVAL_600W_LLC_12V_C7_D

Example of system understanding: Infineon demo solution for Titanium HV DC/DC stage



Half-Bridge LLC with synchronous rectification in center tap configuration

| | |
|-------------------------|-------------------------|
| V_{in} | 350-410 V _{DC} |
| V_{in_nom} | 380 V _{DC} |
| V_{out_nom} | 12 V _{DC} |
| I_{out} | 50 A |
| P_o | 600 W |
| $f_{res} = f_0$ | 157 kHz |
| f_{min} | 90 kHz |
| f_{max} | 210 kHz |
| Transformer turns ratio | 16:1 |
| C_r | 66 nF |
| L_r | 15.5 μ H |
| L_m | 195 μ H |

Primary HV MOSFETs
CoolMOS™ IPP60R180C7

- Reduced gate charge (Q_g)
- > Reduced E_{off}
 - > High body diode ruggedness

SR MOSFETs
OptiMOS™ BSC010N04LS

- New generation
- > Best FOM $R_{DS(on)} \times Q_g$
 - > Best FOM $R_{DS(on)} \times Q_{oss}$

HB Gate Drive IC

2EDL05N06PF

Non isolated LS Gate Drive

2EDN7524F

LLC controller


Digital XMC4200 / Analog ICE2HS01G

Bias QR Flyback controller

ICE2QR2280Z

SR MOSFETs

BSC010N04LS

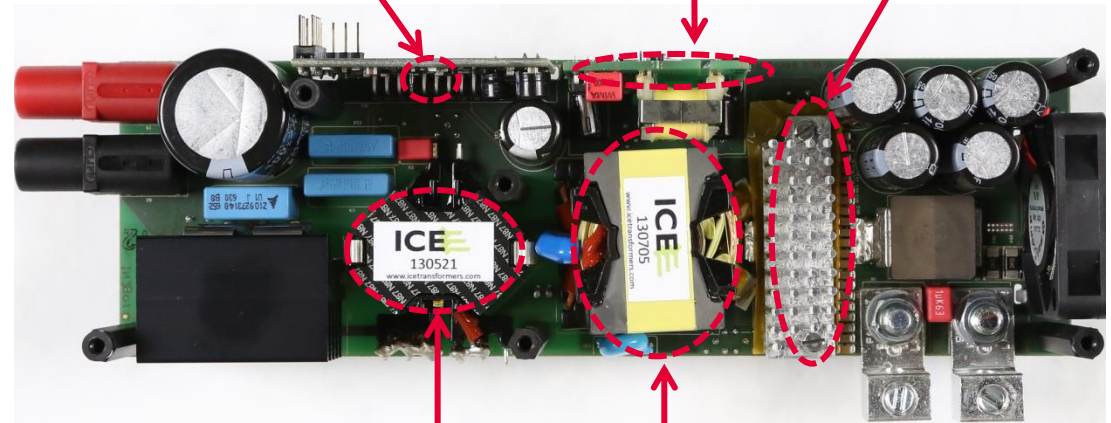

Resonant inductor

RM12 core

Transformer

PQ35/35 core

Control board analog & digital



Two possible solution to control Infineon`s 600 W LLC evaluation board

Analog - ICE2HS01G




- > Resonant mode controller for Half-Bridge LLC resonant converter with synchronous rectification drives
- > Driving signal for synchronous rectification which support full operation of Half-Bridge LLC resonant converter
- > 20-pin DSO package
- > 30 kHz to 1MHz switching frequency
- > 50% duty cycle for both primary and secondary gate drives
- > Adjustable dead time with high accuracy

Digital - XMC4200-Q48K256 AB


- > ARM® Cortex®-M4, 80 MHz, incl. single cycle DSP MAC and floating point unit (FPU)
- > 8-channel DMA + dedicated DMA for USB
- > USB 2.0 full-speed device
- > CPU Frequency: 80 MHz
- > eFlash: 256 kB including hardware ECC
- > 40 kB SRAM
- > Package: PG-LQFP-48

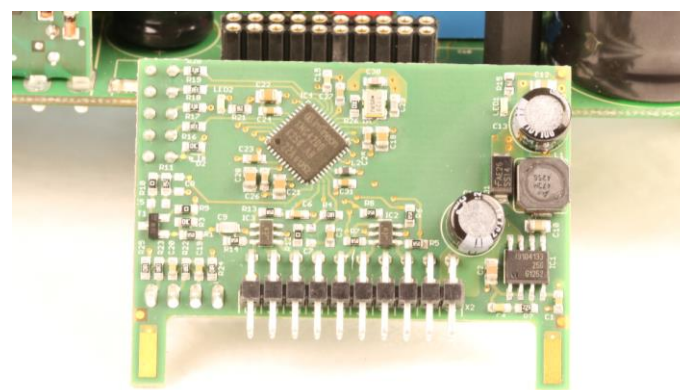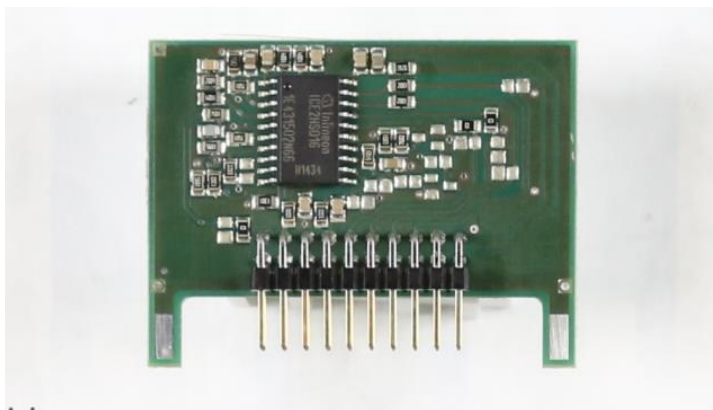

PCB boards layout: main power board and control and bias daughter boards

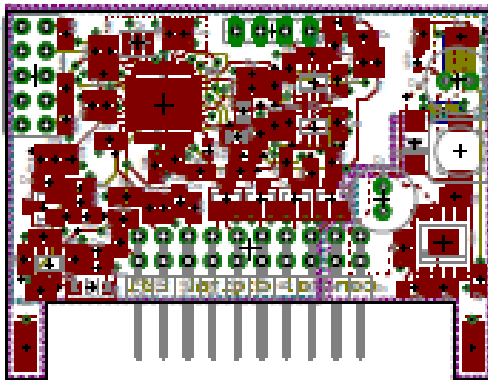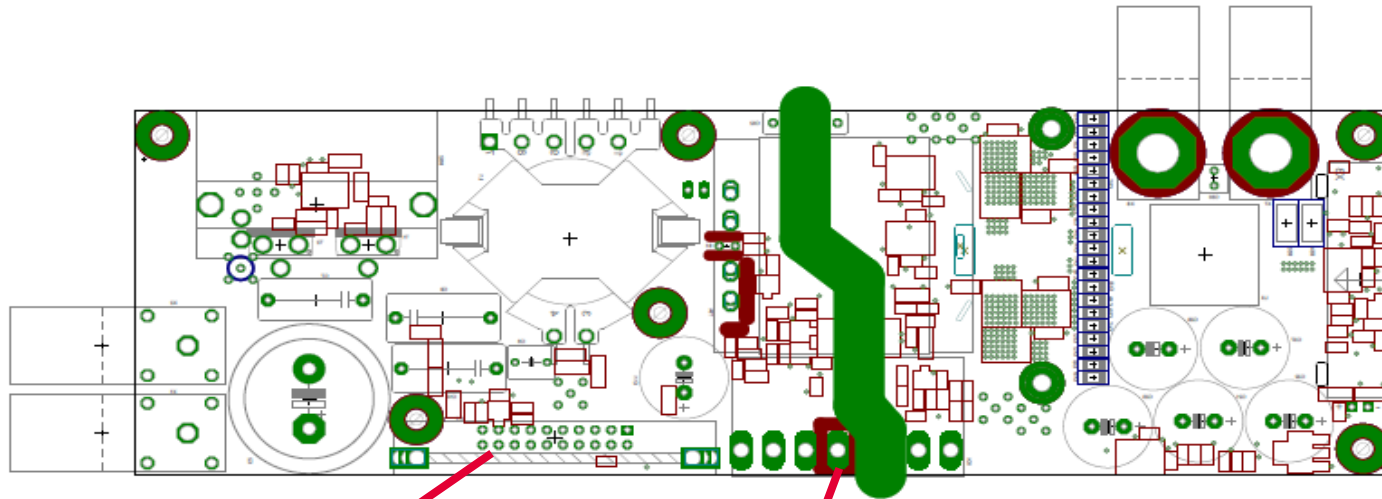


Controller board

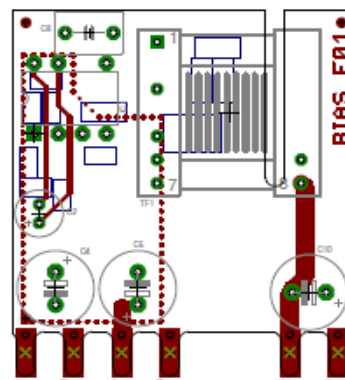


Bias board

- Power density $>20 \text{ W/inch}^3$


Main power board schematic (digital)

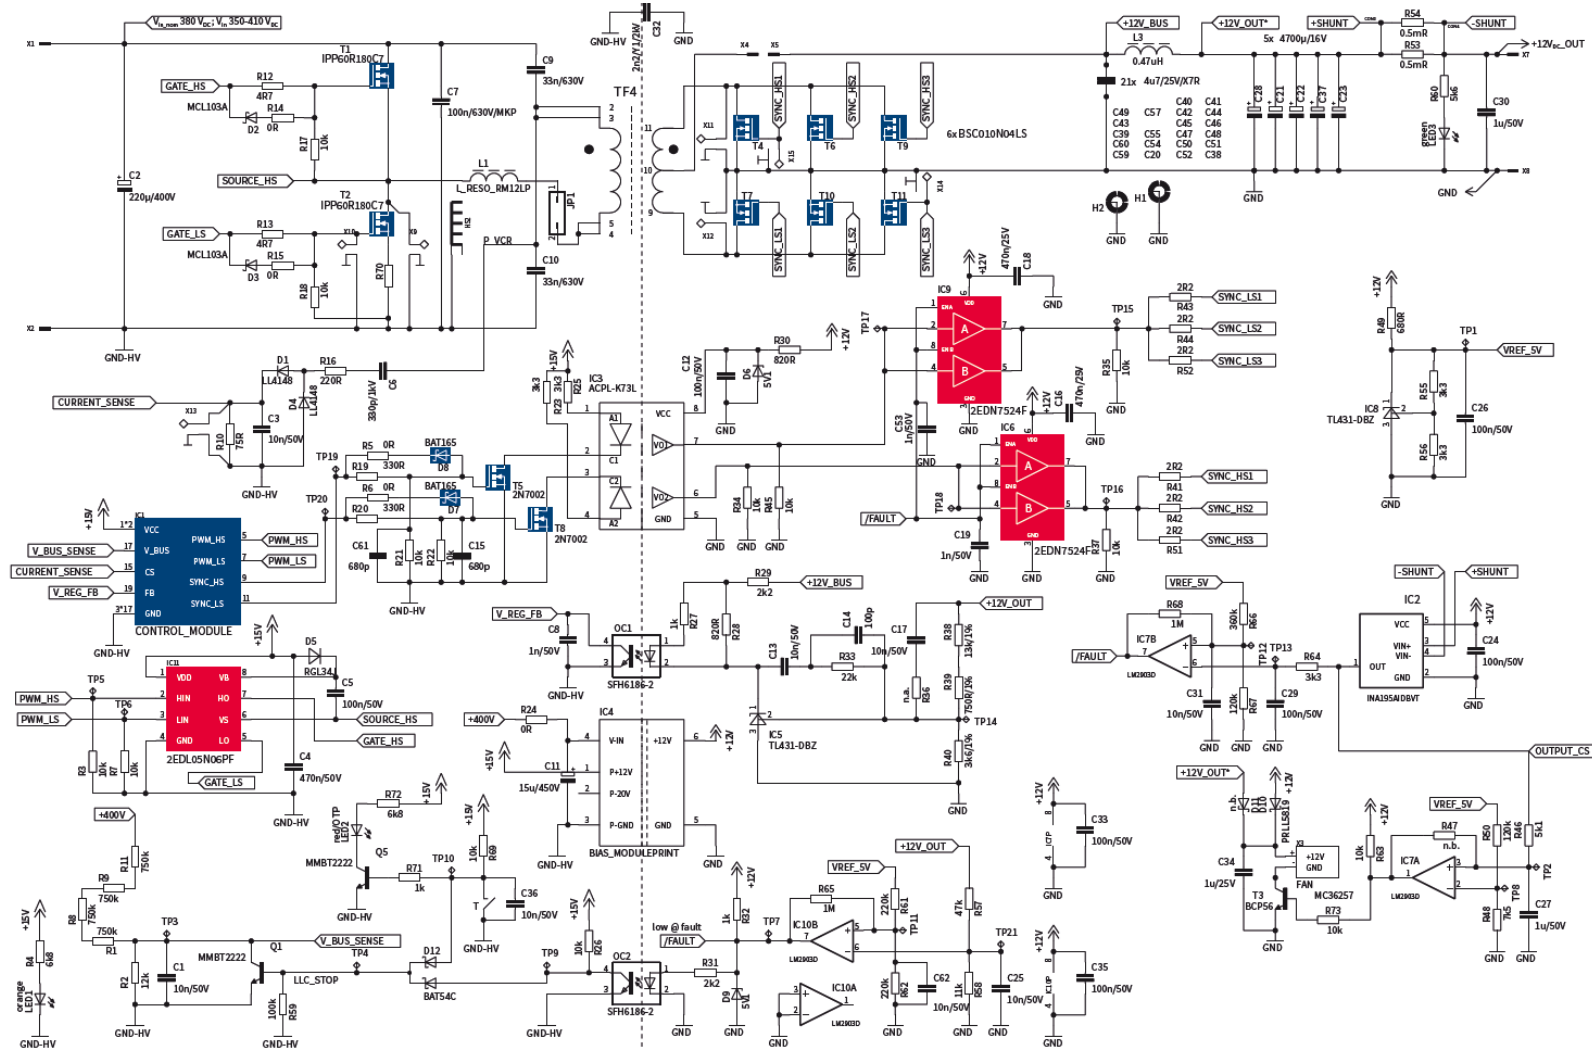

Bias board schematic

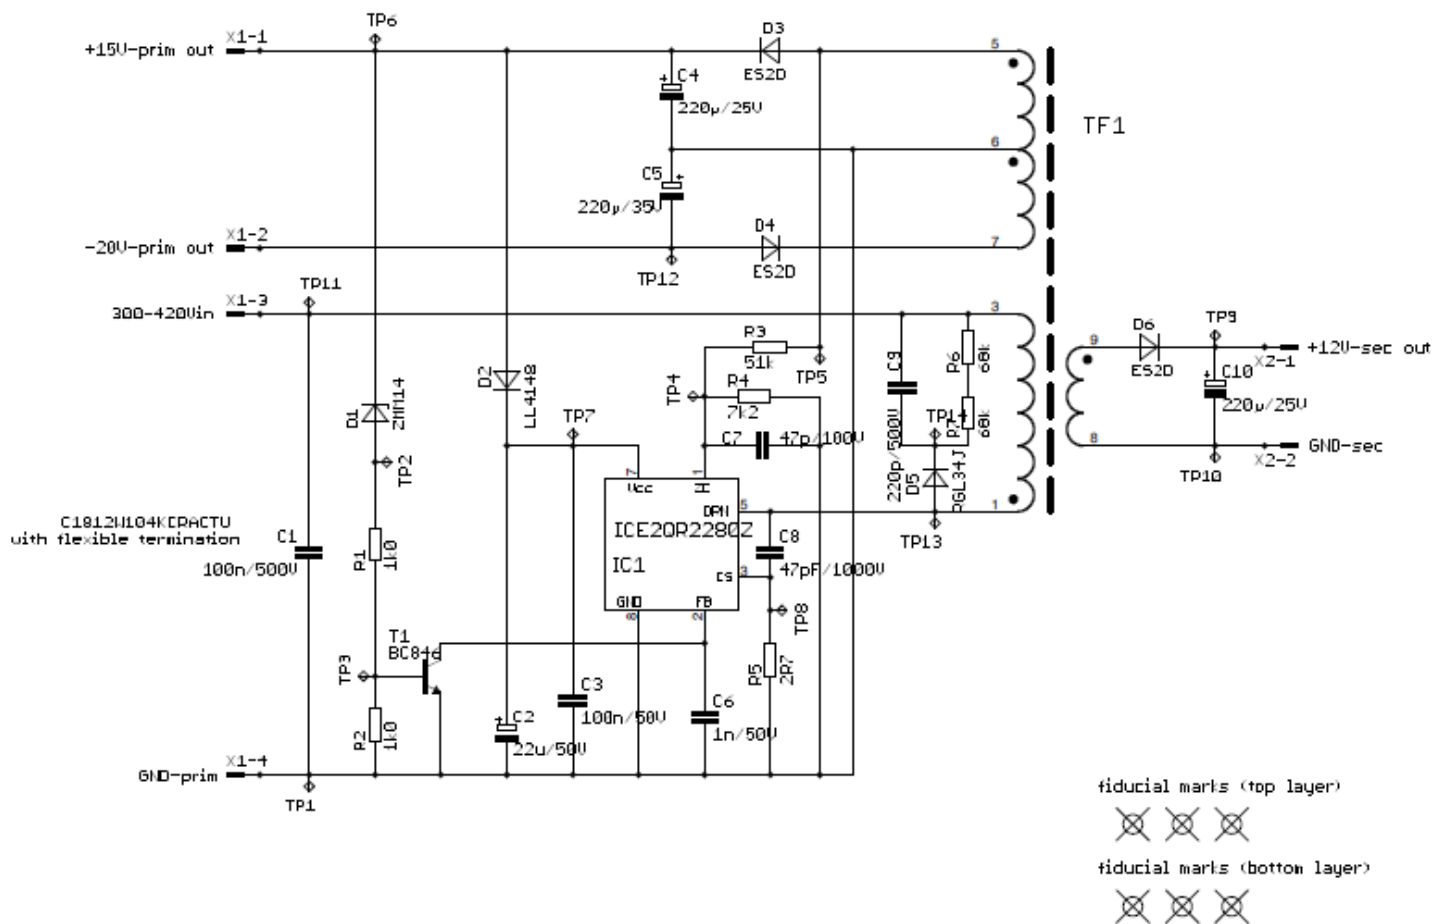


Analog control board schematic

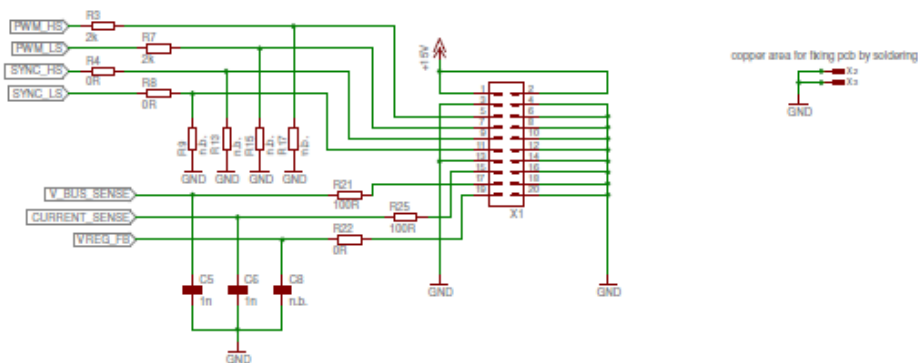


copper area for fixing pcb by soldering



fiducial marks on top layer

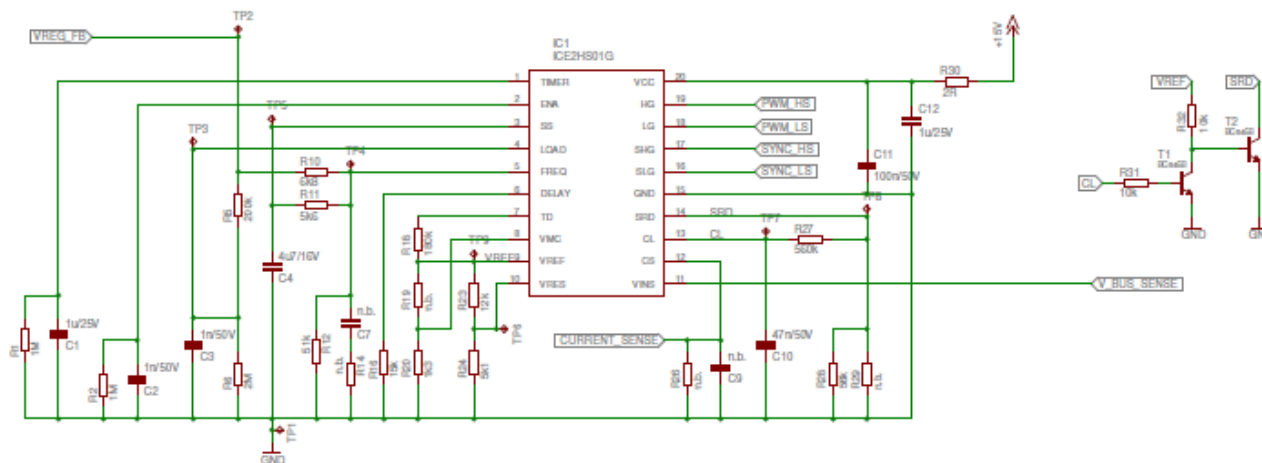

Digital control board schematic

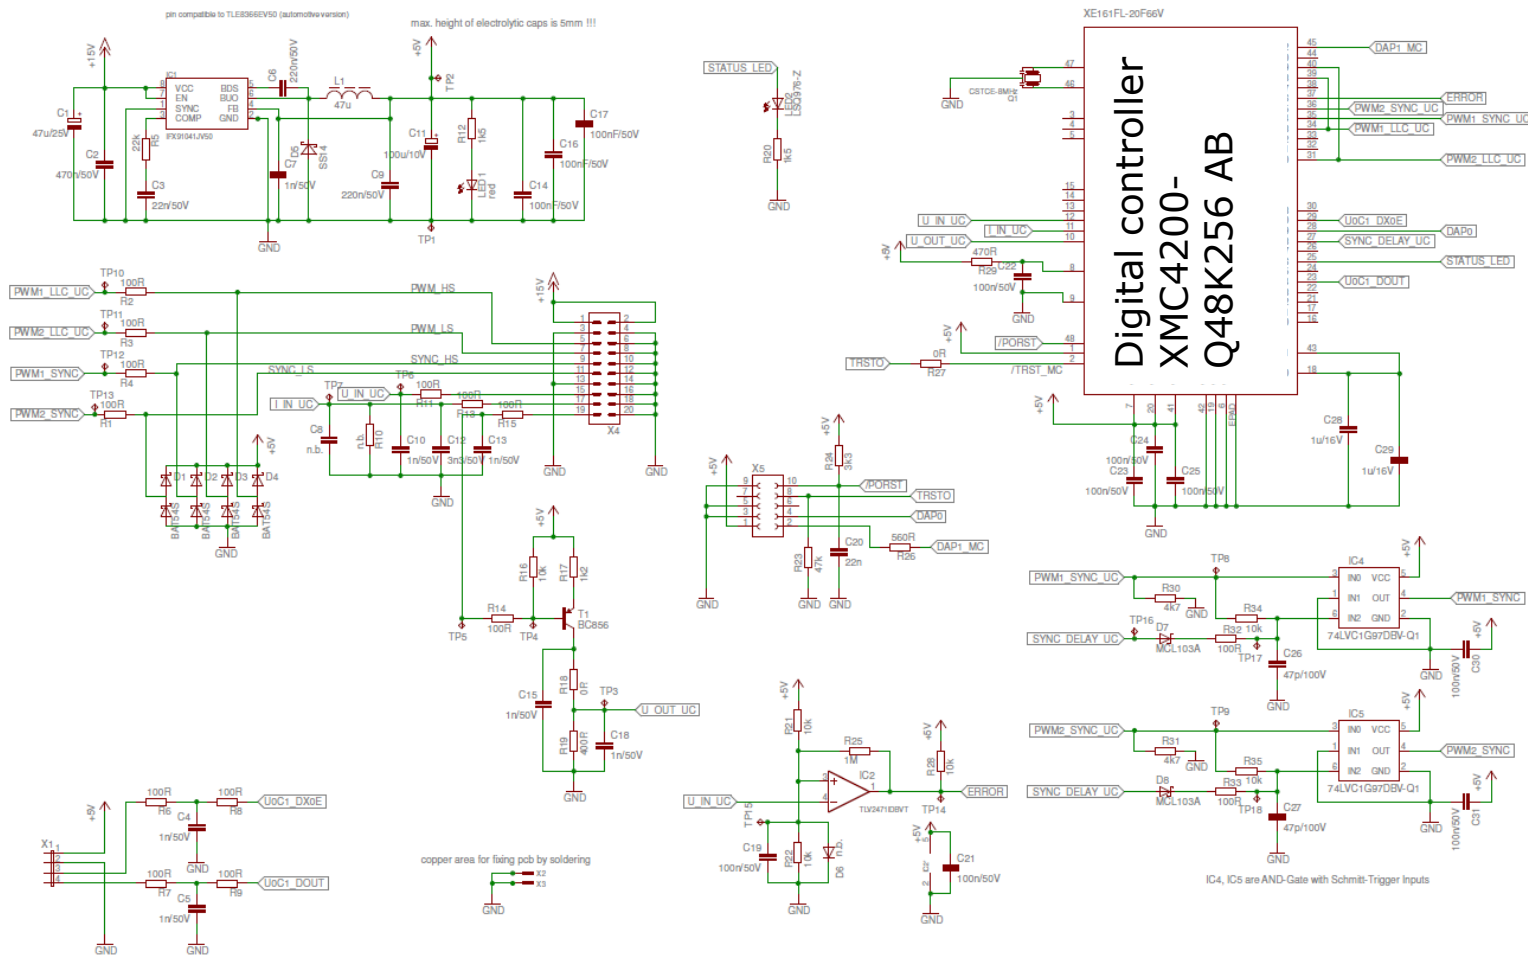

PCB structure

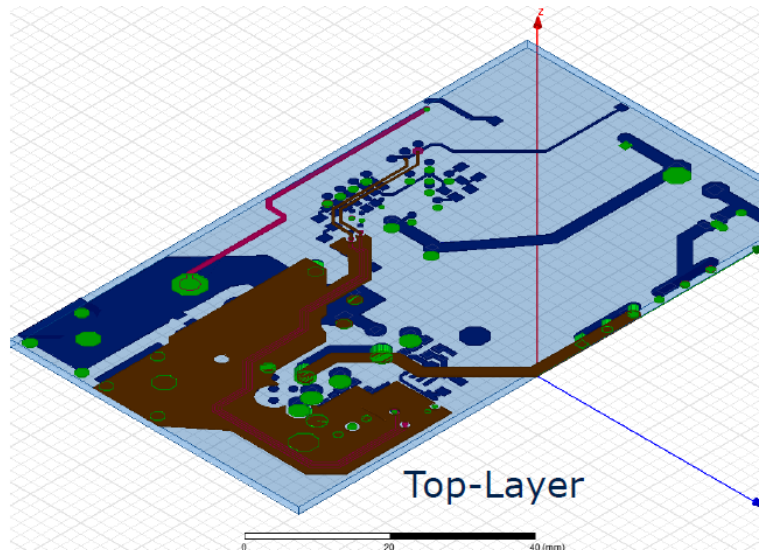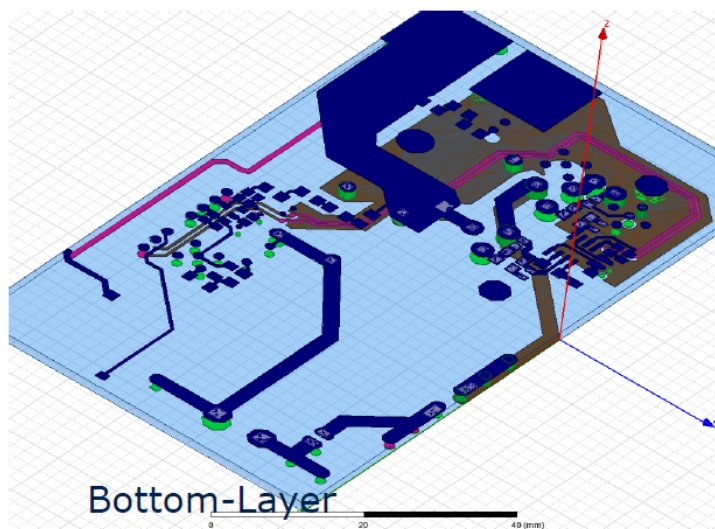

PCB-Stackup

| Nr | Copper | Isolation |
|----------------|-------------------------------------|-------------------------------------|
| 1 | <input type="text" value="0.07mm"/> | <input type="text" value="0.15mm"/> |
| 2 | <input type="text" value="0.07mm"/> | <input type="text" value="0.93mm"/> |
| 15 | <input type="text" value="0.07mm"/> | <input type="text" value="0.15mm"/> |
| 16 | <input type="text" value="0.07mm"/> | |
| Gesamt: 1.51mm | | |

BOM (rework from digital to analog)

| Part | Value | Pcs | Tolerance | Device | Package | Description | Assembling info | Supplier |
|------|----------|-----|-----------|------------|---------|--------------------|-------------------------------|----------|
| C3 | 470n/50V | 1 | | C-EU_C0805 | C0805 | CAPACITOR | Replace 10n/50V with 470n/50V | |
| R19 | 4K3 | 1 | ±1% | R-EU_R0805 | R0805 | RESISTOR | Replace 330R with 4K3 | |
| R20 | 4K3 | 1 | ±1% | R-EU_R0805 | R0805 | RESISTOR | Replace 330R with 4K3 | |
| R36 | 56R | 1 | ±1% | R-EU_R0805 | R0805 | RESISTOR | Assemble n.a. with 56R | |
| IC1 | Board | 1 | | Board | PCB | Analog_Controlcard | | IFX |

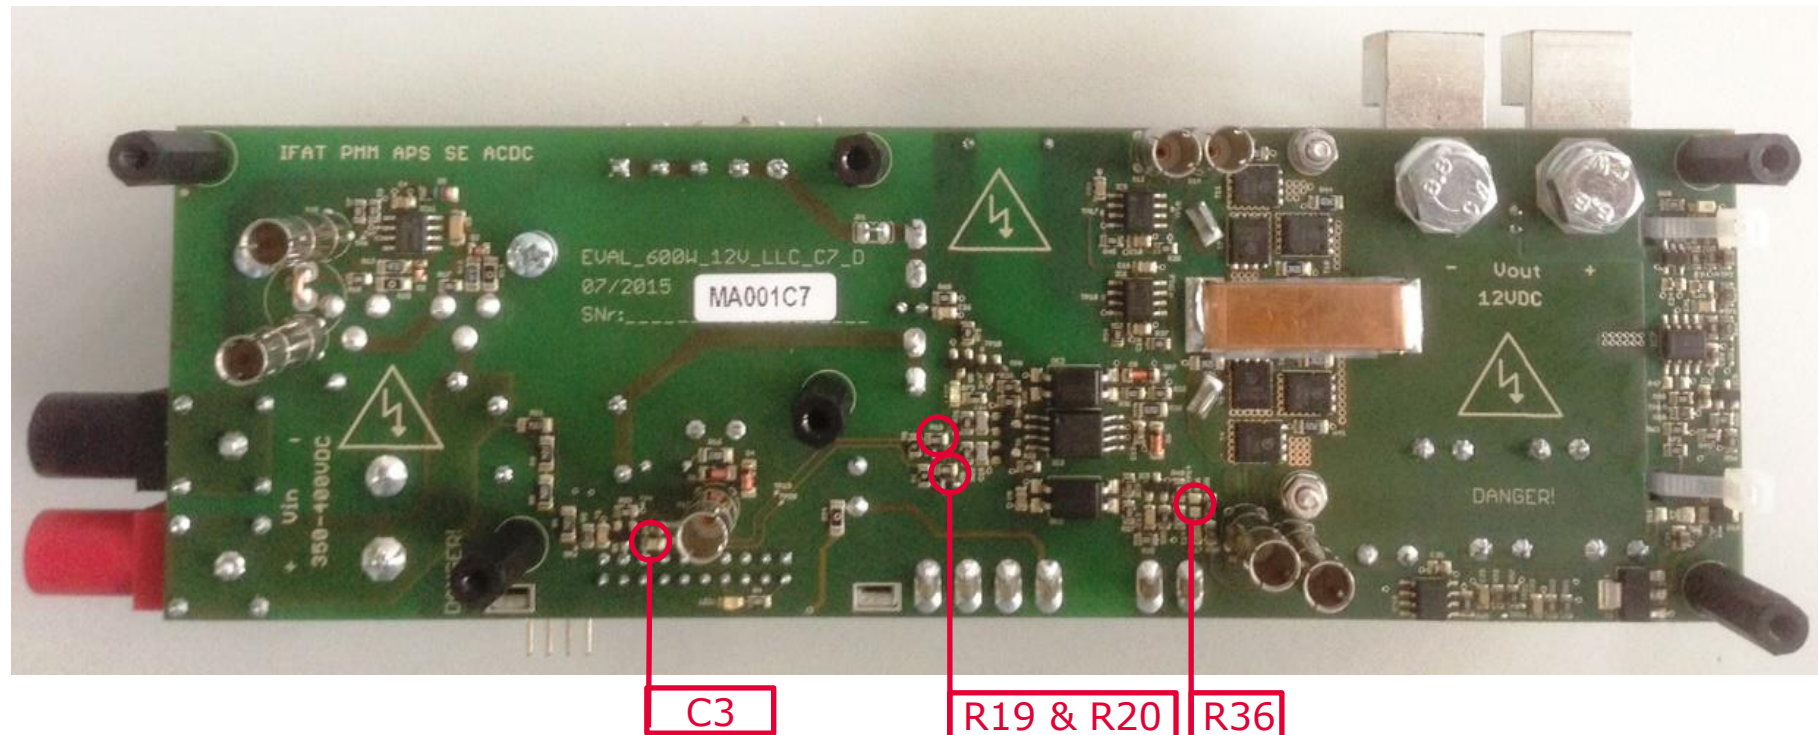


Table of contents

I General description


II Efficiency results

III Design concept


Automated efficiency measurement

Combination of converter design (resonant tank, transformer) and proper HV device election

Proper selection of SR LV device and secondary side

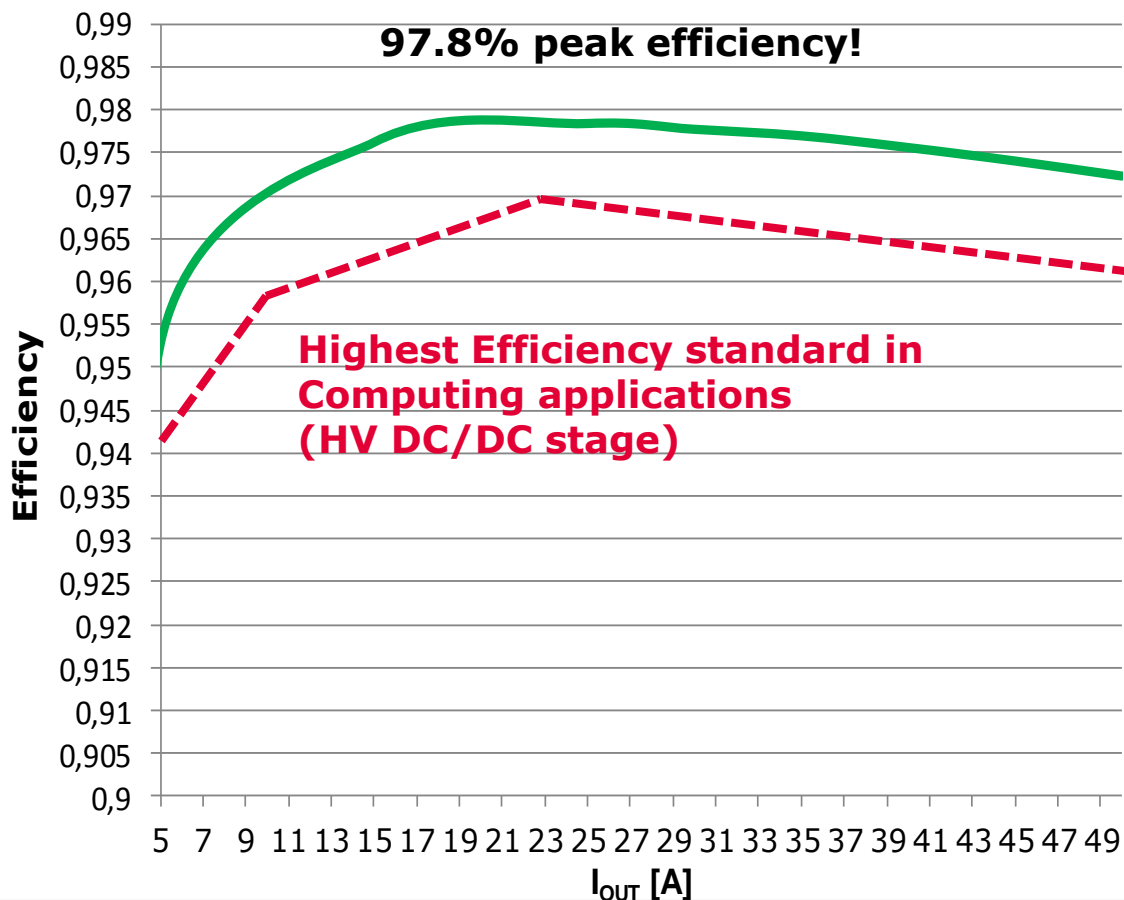

- > Output voltage: 12 V_{DC}
- > Output current: 50 A
- > Efficiency: > 95% @ 10% load, V_{in} = 380 V_{DC}
- > Efficiency max: 97.8%, V_{in} = 380 V_{DC}

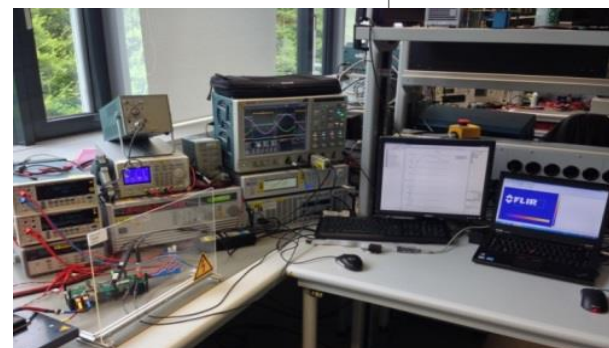

0.1% Total accuracy

Table of contents

1

General description

2

Efficiency results

3

Design concept

Design procedure: input data

$$n = \frac{V_{in_nom}}{2 \cdot V_{out_nom}}$$

$$M_{min} \equiv K_{min}(Q, m, F_x) = \frac{n \cdot V_{o_min}}{V_{in_max} / 2}$$

$$M_{max} \equiv K_{max}(Q, m, F_x) = \frac{n \cdot V_{o_max}}{V_{in_min} / 2}$$

Resonant tank components and related resonant frequencies


- › $n = V_{in_nom} / (2 \times V_o) = 380 / (2 \times 12) \approx 16$
- › $L_m = 195 \mu H$
- › $L_r = 15.5 \mu H$
- › $L_n = L_m / L_r = 12.5$
- › $C_r = 66 nF$

$$f_o = \frac{1}{2\pi \cdot \sqrt{L_r \cdot C_r}} = 157 kHz$$

$$f_p = \frac{1}{2\pi \cdot \sqrt{(L_r + L_m) \cdot C_r}} = 42.7 kHz$$

Gain curves

DC - gain curve (600W LLC hardware revision C7)

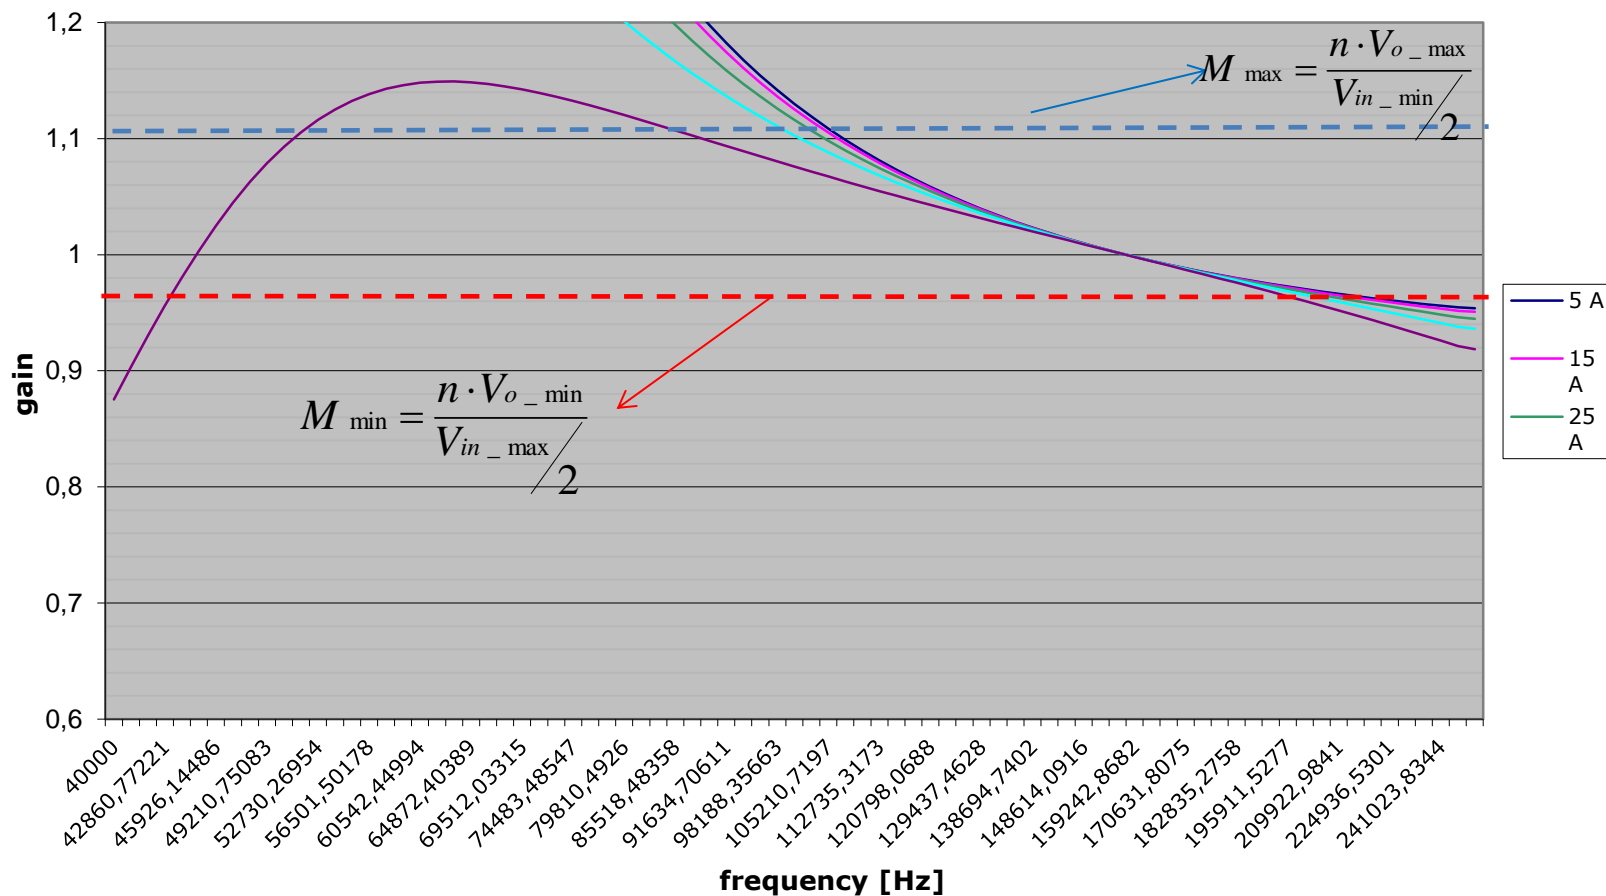

Energy related calculations (Ref. IPP60R180C7 device parameters)


$$I_{mag_min} = \frac{2 \cdot \sqrt{2}}{\pi} \cdot \frac{n \cdot V_o}{2\pi \cdot f_{sw_max} \cdot L_m} = 0.672 \text{ A}$$

$$E_{nres_min} = \frac{1}{2} \cdot (L_m + L_r) \cdot I_{mag_min}^2 = 95.1 \mu\text{J}$$

$$E_{ncap_max} = \frac{1}{2} \cdot (2Co(er)) \cdot V_{DS_max}^2 \approx 9 \mu\text{J}$$

$$\Rightarrow E_{nres_min} > E_{ncap_max}$$

$Q_{oss}, I_{mag,pk}, t_{dead,min}, t_{ecs}$ relationship

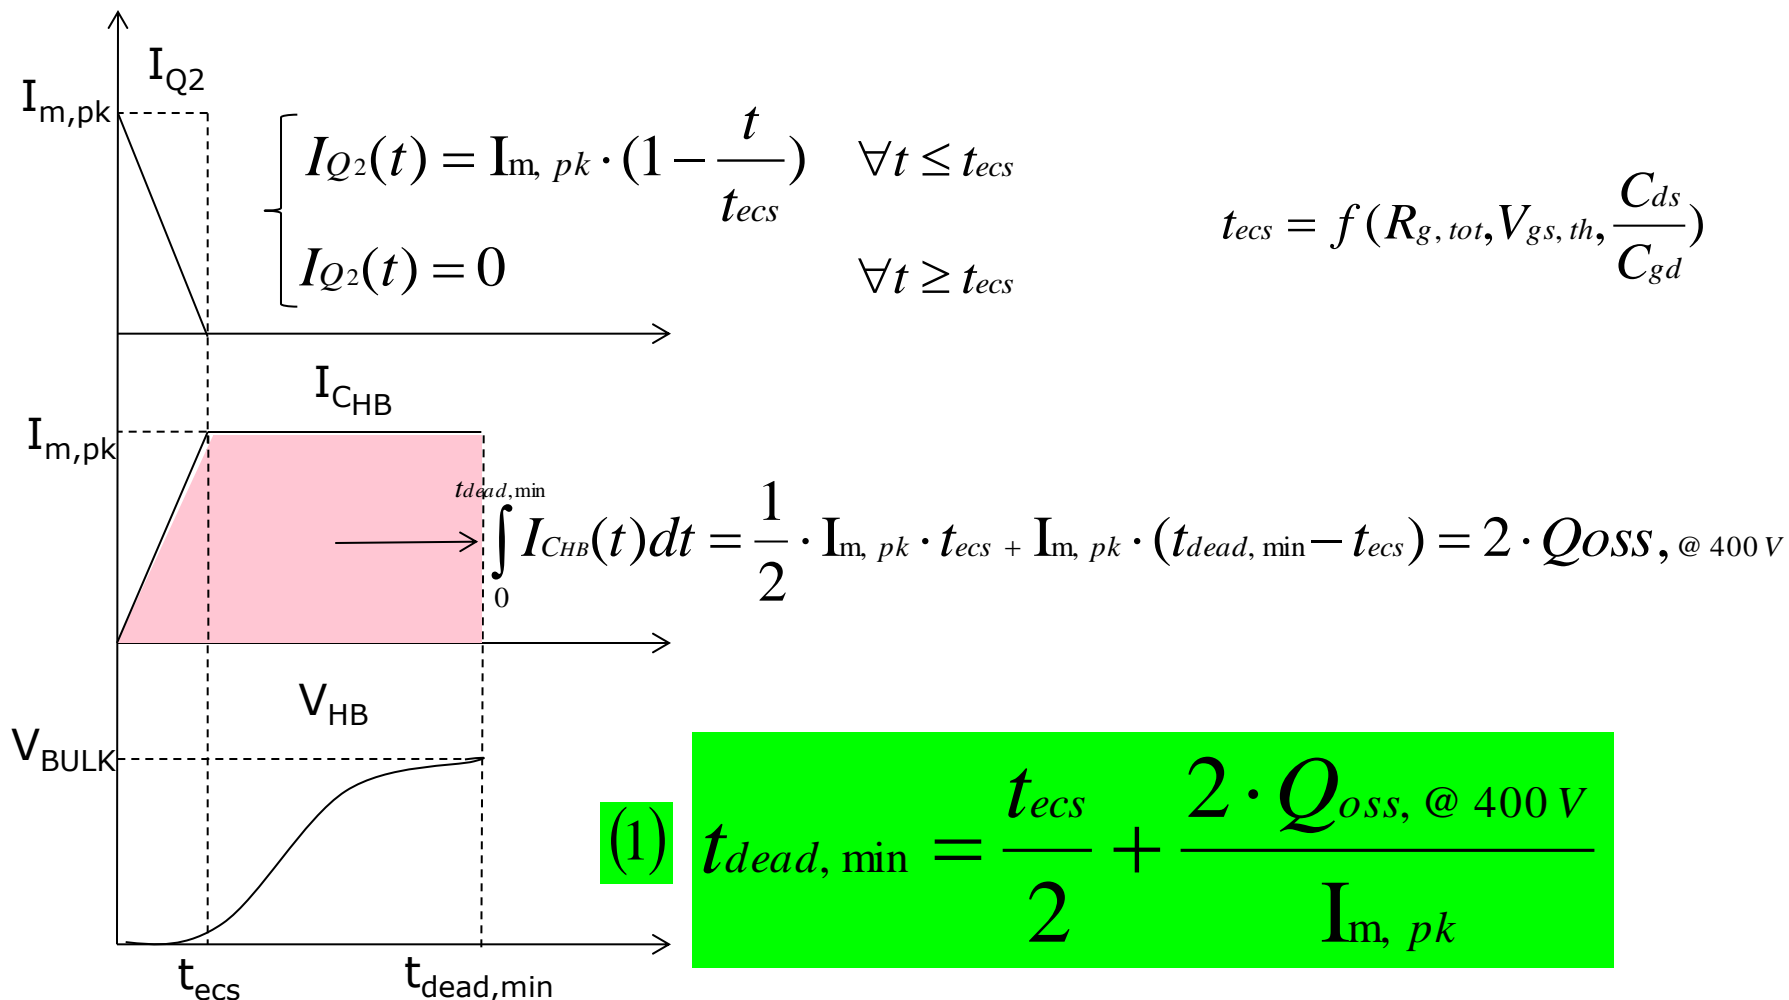

Time related calculations (Ref. IPP60R180C7 device parameters)

$$I_{mag_min} = \frac{2 \cdot \sqrt{2}}{\pi} \cdot \frac{n \cdot V_o}{2\pi \cdot f_{sw_max} \cdot L_m} = 0.672 \text{ A}$$


$$I_{mag_max} = \frac{2 \cdot \sqrt{2}}{\pi} \cdot \frac{n \cdot V_o}{2\pi \cdot f_{sw_min} \cdot L_m} = 1.66 \text{ A}$$

$$t_{dead, min} = \frac{t_{ecs}}{2} + \frac{2 \cdot Q_{oss, @ 400V}}{I_{mag, max}} \approx 130 \text{ nsec}$$



$$t_{dead, max} = \frac{t_{ecs}}{2} + \frac{2 \cdot Q_{oss, @ 400V}}{I_{mag, min}} \approx 311 \text{ nsec}$$

Main transformer structure: PQ35/35 core with TDK PC95 ferrite material

| Wind. | Conductor | N°. of Turns | R o p e | Output pin | Winding layer | N°. layer | Sleeves | | | Notes | |
|--|-----------------------------------|--------------|------------------|-------------|---------------|-----------|---------|-----------|-----------------|-------|---|
| | | | | | | | Col. | Ref. M.L. | Free length mm. | | |
| N1a | 2xLitz 90x0.10 Ref.3 | 0 | + | 2-3 * | 8 | 1 | Re | 8 | 20 | / | 2 wires in 1 sleeve. |
| Insulation: 3 turns of polyester adhesive tape Ref.6 | | | | | | | | | | | |
| N2 N3 | Copper foil 0.50x0.20 Ref.4 | 0 1 | + | A B C | 1 | 1 | / | / | / | / | |
| Insulation: 1 turns of polyester adhesive tape Ref.6 + 1 piece as showed in pictures | | | | | | | | | | | |
| N1b | 2xLitz 90x0.10 Ref.3 | 0 | + | * 4-5 | 8 | 1 | Re | 8 | 20 | / | 2 wires in 1 sleeve. Don't need correspondence |
| Insulation: 3 turns of polyester adhesive tape Ref.6 | | | | | | | | | | | |

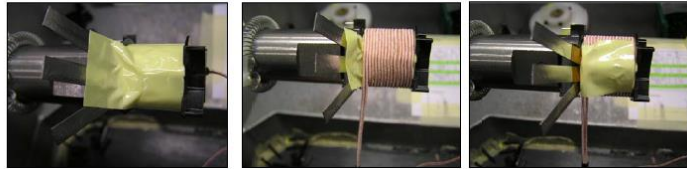

Insert piece of tape after the insulation of N2-N3. Wind N1b. Refold tape, block and connect the wires to pin

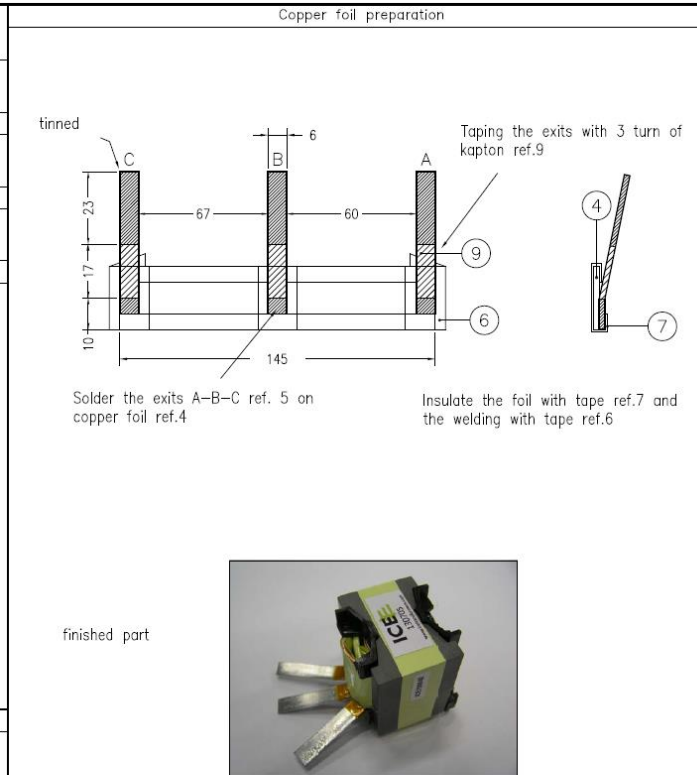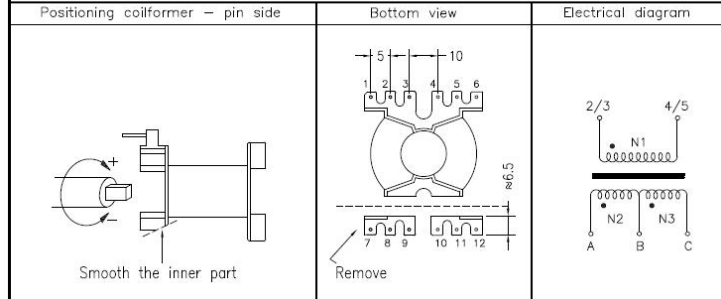

| REV | APPR DATE | REF. MOD. | DESCRIPTION OF MODIFICATION | EDITING | CHECKING AND APPROVAL |
|-----|-----------|-----------|-----------------------------|-------------|-----------------------|
| 02 | 21.07.15 | | Inserted label and pictures | C. Picciani | D. Di Giorgio |
| 01 | 24.01.14 | | Release | C. Picciani | D. Di Giorgio |


TRANSFORMERS

| | | | | | |
|---------------|---------------|---------------|----------|--------------|------|
| Mod. AQ 05.09 | DOCUMENT TYPE | CODE | REVISION | RELEASE DATE | PAGE |
| | P.F. | 8065.0703.001 | 02 | 24.01.14 | 1of2 |

Resonant choke: RM12 core, material N87

| Wind. | Conductor type | N. of windings | R.P.C. | output pin | Winding Layer | N. of Layer | Tube | | | Notes | | | | | | | | | | | | | | | | | | |
|--|---|-------------------------------|--------------------------|----------------|----------------------|--------------------|----------|--------|----------------------|---|-------------|-------------|------------|--------------------------|----------|----------------------|------|---------------|------|--------------------|-------------|---------------|--------|----------|--|---------|-------------|---------------|
| | | | | | | | Color | Ref. | Length mm | | | | | | | | | | | | | | | | | | | |
| N1 | Litz 120x0.10 Ref. 4 | 0 9 | + | 7+8+9 10+11 | 9 | 1 | / Red | / 6 | / 20 | Perpendicular crossing on tape ref.5 | | | | | | | | | | | | | | | | | | |
| Insulation: 2 turns polyester tape Ref.5 | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Bill of materials | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Ref. | Description | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | Coil Former RM12 12pins (B65816-C1512-T1 Epcos mat.Valox420 E45329) | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | Ferrite core RM12 gap 1.1mm (B65815-R87 Epcos) | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | RM12 clamp (B65816-A2002 Epcos) | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4 | Litz wire 120x0.100mm G1 (155°C E125660 or equivalent) | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 5 | Polyester adhesive tape H=16mm thickness 0.06mm (P31 E178430 or equivalent) | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 6 | Tube glass/silicone Ø1,5mm 4KV 20mm (GVES2500 E311983 or equivalent) | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 7 | Activator for epoxy resin (IN1005 or equivalent) | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 8 | Epoxy resin (36T or equivalent) | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 9 | PVC label 24x12mm | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 10 | Insulating varnish classH (AC43 E317427 or equivalent) | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 11 | Polyestere label 4.7x14mm (7816 MH16411 or equivalent) | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Winding rotation | | | Bottom View | | | Electrical drawing | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Assembling | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <p>Dimensions in millimeter RoHS compliant</p> | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Electrical test | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| N°. | Test type | Test conditions | | | | | | | Limits | | | | | | | | | | | | | | | | | | | |
| 1 | Inductance | 7+8+9-10+11 @ 10 kHz - 100 mV | | | | | | | from 11.9 to 16.1 µH | | | | | | | | | | | | | | | | | | | |
| <table border="1"> <thead> <tr> <th>REV</th> <th>Appr. data</th> <th>Ref. Mod.</th> <th>Modification description</th> <th>Editing</th> <th>Checked and Approved</th> </tr> </thead> <tbody> <tr> <td>G2</td> <td>21.07.15</td> <td></td> <td>Inserted new label</td> <td>C. Picciani</td> <td>D. Di Giorgio</td> </tr> <tr> <td>G1</td> <td>23.01.14</td> <td></td> <td>Release</td> <td>C. Picciani</td> <td>D. Di Giorgio</td> </tr> </tbody> </table> | | | | | | | | | | | REV | Appr. data | Ref. Mod. | Modification description | Editing | Checked and Approved | G2 | 21.07.15 | | Inserted new label | C. Picciani | D. Di Giorgio | G1 | 23.01.14 | | Release | C. Picciani | D. Di Giorgio |
| REV | Appr. data | Ref. Mod. | Modification description | Editing | Checked and Approved | | | | | | | | | | | | | | | | | | | | | | | |
| G2 | 21.07.15 | | Inserted new label | C. Picciani | D. Di Giorgio | | | | | | | | | | | | | | | | | | | | | | | |
| G1 | 23.01.14 | | Release | C. Picciani | D. Di Giorgio | | | | | | | | | | | | | | | | | | | | | | | |
| <table border="1"> <thead> <tr> <th>TRANSFORMER</th> <th>DESCRIPTION</th> <th>INDUCTANCE</th> <th>CODE</th> <th>REVISION</th> <th>EMISSION DATE</th> <th>PAGE</th> </tr> </thead> <tbody> <tr> <td>Mod. AQ 05.09</td> <td>P.F.</td> <td>8017.0901.012</td> <td>02</td> <td>23.01.14</td> <td>1 of 1</td> </tr> </tbody> </table> | | | | | | | | | | | TRANSFORMER | DESCRIPTION | INDUCTANCE | CODE | REVISION | EMISSION DATE | PAGE | Mod. AQ 05.09 | P.F. | 8017.0901.012 | 02 | 23.01.14 | 1 of 1 | | | | | |
| TRANSFORMER | DESCRIPTION | INDUCTANCE | CODE | REVISION | EMISSION DATE | PAGE | | | | | | | | | | | | | | | | | | | | | | |
| Mod. AQ 05.09 | P.F. | 8017.0901.012 | 02 | 23.01.14 | 1 of 1 | | | | | | | | | | | | | | | | | | | | | | | |


Evaluation board EVAL_600W_12V_LLC_C7

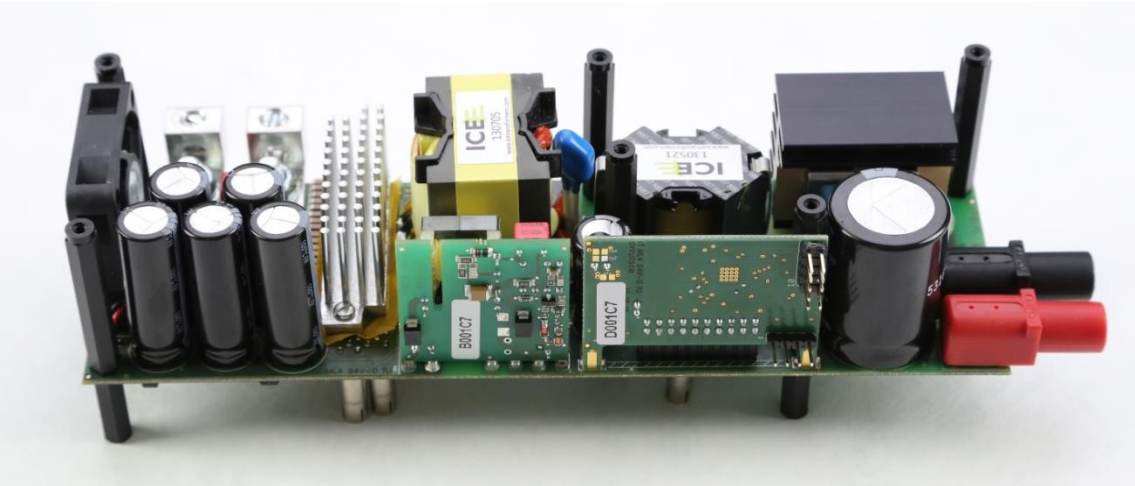

Support slides 600W LLC evaluation board

Evaluation board page

- Technical description
- Datasheets
- Parameters
- Related material
- Videos

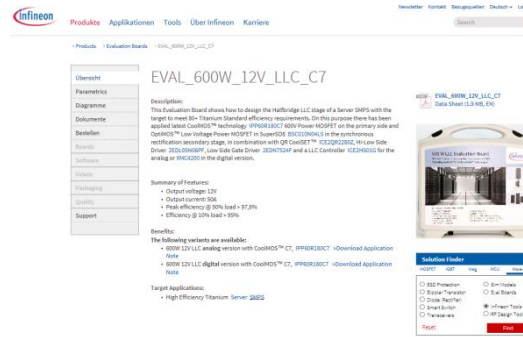

- [EVAL_600W_12V_LLC_C7](#)

Product family pages

- Product brief
- Application notes
- Selection guides
- Datasheets and portfolio
- Videos
- Simulation models



- [650V CoolMOS™ C7](#)
- [XMC 32-Bit Industrial Microcontroller](#)
- [Resonant Mode Controller](#)
- [OptiMOS™ 5 40V and 60V](#)





Part of your life. Part of tomorrow.





Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.