

QUICK START GUIDE FOR DEMONSTRATION CIRCUIT 700

2.4MHZ, 2-PHASE BOOST CONVERTER

LTC3428EDD

DESCRIPTION

Demonstration circuit 700 is a 2.4MHz, Dual Phase Step-Up DC/DC Converter featuring the LTC3428EDD. The demo board demonstrates a dual phase DC/DC boost converter, with a 2A switch (per phase), capable of providing either 5V at 2A or 3.3V at 1.5A. The circuit demonstrates the advantages of the dual phase architecture for an effective switching frequency of 2.4MHz. Small circuit size and low component count makes the LTC3428 suitable for use in many space-

conscious applications such as handheld instruments, point-of-load converters, digital cameras, cellular phones, distributed power and networking equipment. Other integrated features include internal soft-start, antiringing control and thermal shutdown.

Design files for this circuit board are available. Call the LTC factory.

LTC is a trademark of Linear Technology Corporation

Table 1. Performance Summary ($T_A = 25^\circ\text{C}$)

PARAMETERS FOR 5V OUT	CONDITION	VALUE
Minimum Input Voltage		3.3V
Maximum Input Voltage		4.5V
Output Voltage V_{OUT}	$V_{\text{IN}} = 3.3\text{V}$, $I_{\text{OUT}} = 0\text{A}$ to 2A	$5\text{V} \pm 4\%$
Maximum Output Current		2A
Typical Output Ripple V_{OUT}	$V_{\text{IN}} = 3.3\text{V}$, $I_{\text{OUT}} = 2\text{A}$	$20\text{mV}_{\text{P-P}}$
Typical efficiency	$V_{\text{IN}} = 5\text{V}$, $I_{\text{OUT}} = 2\text{A}$	87.5%
PARAMETERS FOR 3.3V OUT	CONDITION	VALUE
Minimum Input Voltage		1.8V
Maximum Input Voltage		3.3V
Output Voltage V_{OUT}	$V_{\text{IN}} = 1.8\text{V}$ to 3V , $I_{\text{OUT}} = 0\text{A}$ to 1.5A	$3.3\text{V} \pm 4\%$
Maximum Output Current		1.5A
Typical Output Ripple V_{OUT}	$V_{\text{IN}} = 2.5\text{V}$, $I_{\text{OUT}} = 1.5\text{A}$	$20\text{mV}_{\text{P-P}}$
Typical efficiency	$V_{\text{IN}} = 1.8\text{V}$ to 3V , $I_{\text{OUT}} = 1.5\text{A}$	81%

Input capacitor C1 used only for operation with long inductive input leads. See Application Note 88 for further details.

QUICK START PROCEDURE

Demonstration circuit 700 is easy to set up to evaluate the performance of the LTC3428EDD. Refer to Figure 1 for proper measurement equipment setup and follow the procedure below:

NOTE: When measuring the input or output voltage ripple, care must be taken to avoid a long ground lead on the oscilloscope probe. Measure the input or output voltage ripple by touching the probe tip directly across the Vin or Vout and GND terminals. See Figure 2 for proper scope probe technique.

NOTE: Steps 1-4 are for 5V operation only.

1. Place jumpers in the following positions:

JP1 Run, **JP2** on.

2. With power off, connect the input power supply to VIN and GND.

3. Turn on the power at the input.

NOTE: Make sure that the input voltage does not exceed 4.5V.

4. Check for the proper output voltages.

NOTE: If there is no output, temporarily disconnect the load to make sure that the load is not set too high.

NOTE: Once the proper output voltages are established, adjust the loads within the operating range and observe the output voltage regulation, ripple voltage, efficiency and other parameters.

NOTE: Steps 5-9 are for 3.3V operation only.

5. Place jumper in the following positions:

JP1 Run, **JP2** Removed.

6. With power off, connect the input power supply to VIN and GND.

7. Turn on the power at the input.

NOTE: Make sure that the input voltage is set between 1.8V and 3.3V.

8. Check for the proper output voltages.

NOTE: If there is no output, temporarily disconnect the load to make sure that the load is not set too high.

9. Once the proper output voltages are established, adjust the loads within the operating range and observe the output voltage regulation, ripple voltage, efficiency and other parameters.

QUICK START GUIDE FOR DEMONSTRATION CIRCUIT 700

2.4MHZ, 2-PHASE BOOST CONVERTER

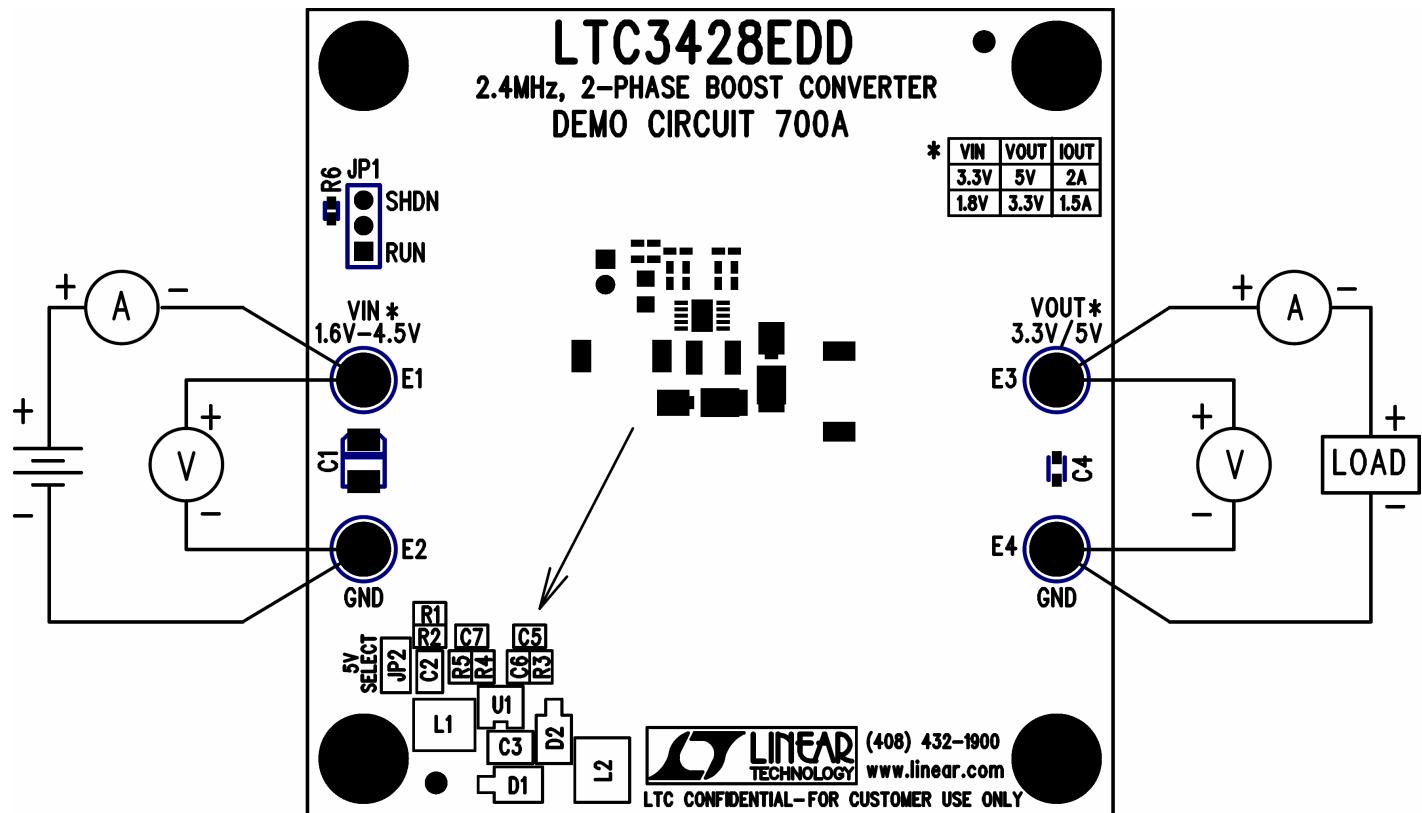


Figure 1. Proper Measurement Equipment Setup





Figure 2. Measuring Input or Output Ripple

QUICK START GUIDE FOR DEMONSTRATION CIRCUIT 700

2.4MHZ, 2-PHASE BOOST CONVERTER

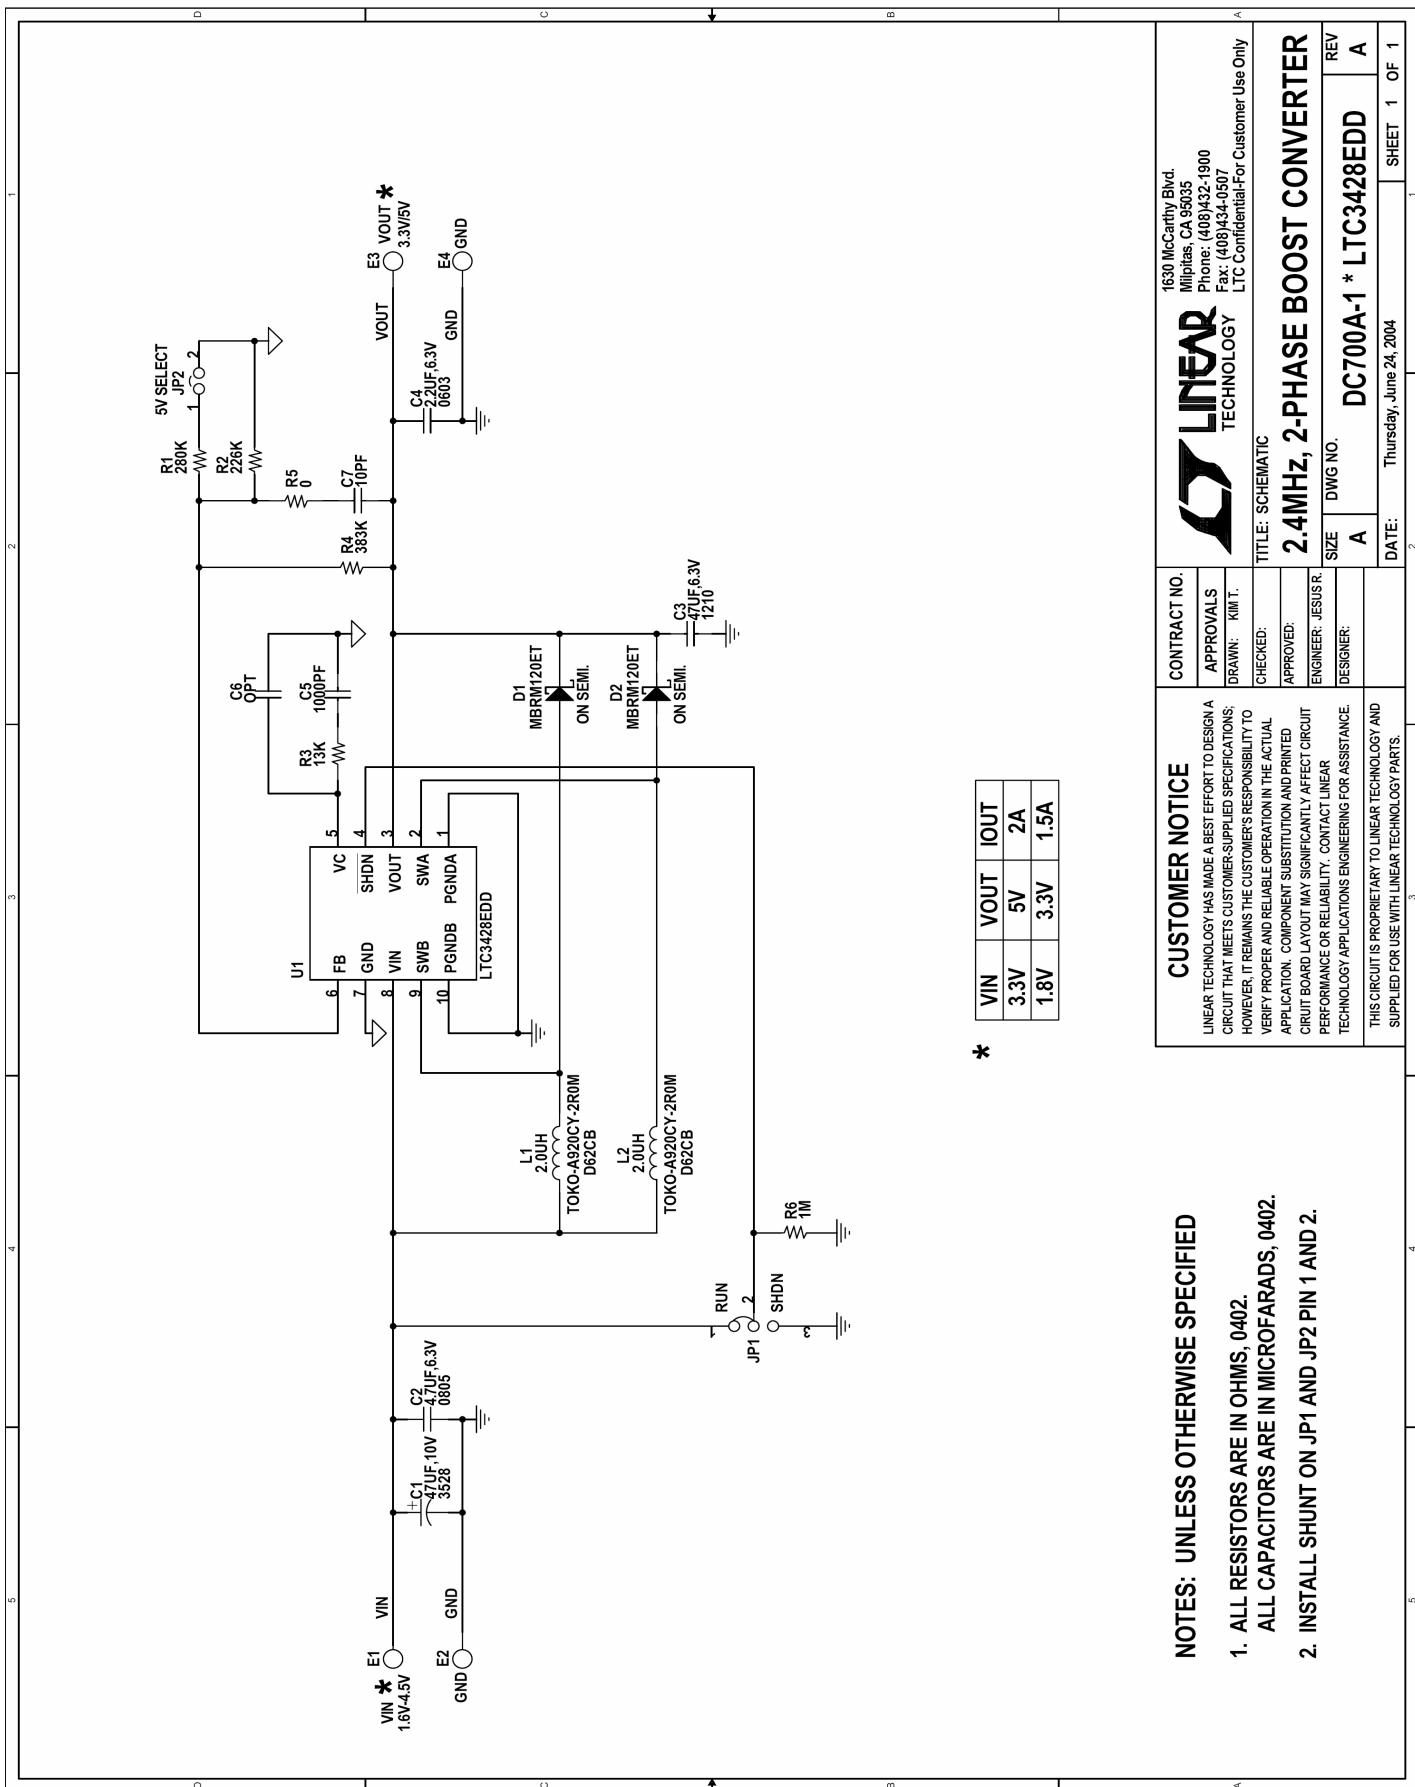

NOTES: UNLESS OTHERWISE SPECIFIED

- ALL RESISTORS ARE IN OHMS, 0402.
- ALL CAPACITORS ARE IN MICROFARADS, 0402.
- INSTALL SHUNT ON JP1 AND JP2 PIN 1 AND 2.

CUSTOMER NOTICE	
LINEAR TECHNOLOGY HAS MADE A BEST EFFORT TO DESIGN A CIRCUIT THAT MEETS CUSTOMER-SUPPLIED SPECIFICATIONS; HOWEVER IT REMAINS THE CUSTOMER'S RESPONSIBILITY TO VERIFY PROPER AND RELIABLE OPERATION IN THE ACTUAL APPLICATION, COMPONENT SUBSTITUTION AND PRINTED CIRCUIT BOARD LAYOUT MAY SIGNIFICANTLY AFFECT CIRCUIT PERFORMANCE OR RELIABILITY. CONTACT LINEAR TECHNOLOGY APPLICATIONS ENGINEERING FOR ASSISTANCE.	
THIS CIRCUIT IS PROPRIETARY TO LINEAR TECHNOLOGY AND SUPPLIED FOR USE WITH LINEAR TECHNOLOGY PARTS.	
CONTRACT NO.	1630 McCarthy Blvd. Milpitas, CA 95035 Phone: (408)432-1900 Fax: (408)434-0507 LTC Confidential-For Customer Use Only
APPROVALS	
DRAWN:	K.M.T.
CHECKED:	
APPROVED:	
ENGINEER:	JESUS R.
DESIGNER:	
SIZE	
DWG NO.	
A	DC700A-1 * LTC3428EDD
REV	A
DATE:	Thursday, June 24, 2004
SHEET	1 OF 1



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помошь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помошь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.