

LTC3805-5

Low Noise SEPIC DC/DC Converter

DESCRIPTION

Demonstration circuit 1576 is high efficiency non-isolated SEPIC (Single Ended Primary Inductor Converter) converter featuring the LTC3805-5 switching controller. The DC1576 converts 5V to 30V input to 12V output and provides over 3A of output current. The converter operates at 300kHz with efficiency over 90%. With proper amount of airflow, the DC1576 converter can generate over 3A of output current. The DC1576 can be easily modified to generate output voltages in the range from 0.8V to 48V.

Also, the DC1576 can be modified for other input voltages like 5V-36V, 9V-36V, 36V-72V, and so on. The wider input voltage range will decrease the converter

efficiency. Therefore, narrow input voltage range will be more desirable.

The LTC3805-5 can be synchronized to an external clock of up to 400kHz. Please refer to LTC3805-5 data sheet for design details and applications information.

Design files for this circuit board are available. Call the LTC factory.

LT, LTC, LTM, LT, Burst Mode, OPTI-LOOP, Over-The-Top and PolyPhase are registered trademarks of Linear Technology Corporation. Adaptive Power, C-Load, DirectSense, Easy Drive, FilterCAD, Hot Swap, LinearView, µModule, Micropower SwitcherCAD, Multimode Dimming, No Latency ΔΣ, No Latency Delta-Sigma, No R_{SENSE}, Operational Filter, PanelProtect, PowerPath, PowerSOT, SmartStart, SoftSpan, Stage Shedding, SwitcherCAD, ThinSOT, UltraFast and VLDO are trademarks of Linear Technology Corporation. Other product names may be trademarks of the companies that manufacture the products.

Table 1. Performance Summary

PARAMETER	CONDITION	VALUE
Minimum Input Voltage	I _{OUT} = 0A to 3A	5V
Maximum Input Voltage	I _{OUT} = 0A to 3A	30V
V _{OUT}	V _{IN} = 5V to 20V, I _{OUT} = 0A to 3A	12V ±3%
Typical Output Ripple V _{OUT}	V _{IN} = 5V to 20V, I _{OUT} = 0A to 3A	100mV _{p-p}
Nominal Switching Frequency		300kHz

QUICK START PROCEDURE

Demonstration circuit 1576 is easy to set up to evaluate the performance of LTC3805-5 circuit. Refer to **Figure 1** for proper measurement equipment setup and follow the procedure below:

NOTE: When measuring the input or output voltage ripple, care must be taken to avoid a long ground lead on the oscilloscope probe. Measure the input or output voltage ripple by touching the probe tip directly across the Vin or Vout and GND terminals. See Figure 2. for proper scope probe technique.

1. With power off, connect the input power supply to Vin and GND. Make sure that the input power sup-

ply has sufficient current rating at minimum input voltage for the required output load.

2. Turn on the power at the input.

NOTE: Make sure that the input voltage does not exceed 30V.

3. Check for the proper output voltage.
V_{out} = 12V, +/-3%.

If there is no output, temporarily disconnect the load to make sure that the load is not set too high.

4. Once the proper output voltage is established, adjust the load within the operating range and ob-

serve the output voltage regulation, ripple voltage, efficiency and other parameters.

5. The DC1576 is equipped with an output capacitor C_{OUT4} (150uF) that approximates typical system rail capacitance. If system board already has capacitance of similar value C_{OUT4} can be removed. The

input capacitor C_{in1} is optional and is used to help with filtering when board is connected to lab supply with long leads. The capacitor C_{in1} can be removed if the input power source is close and has low source impedance.

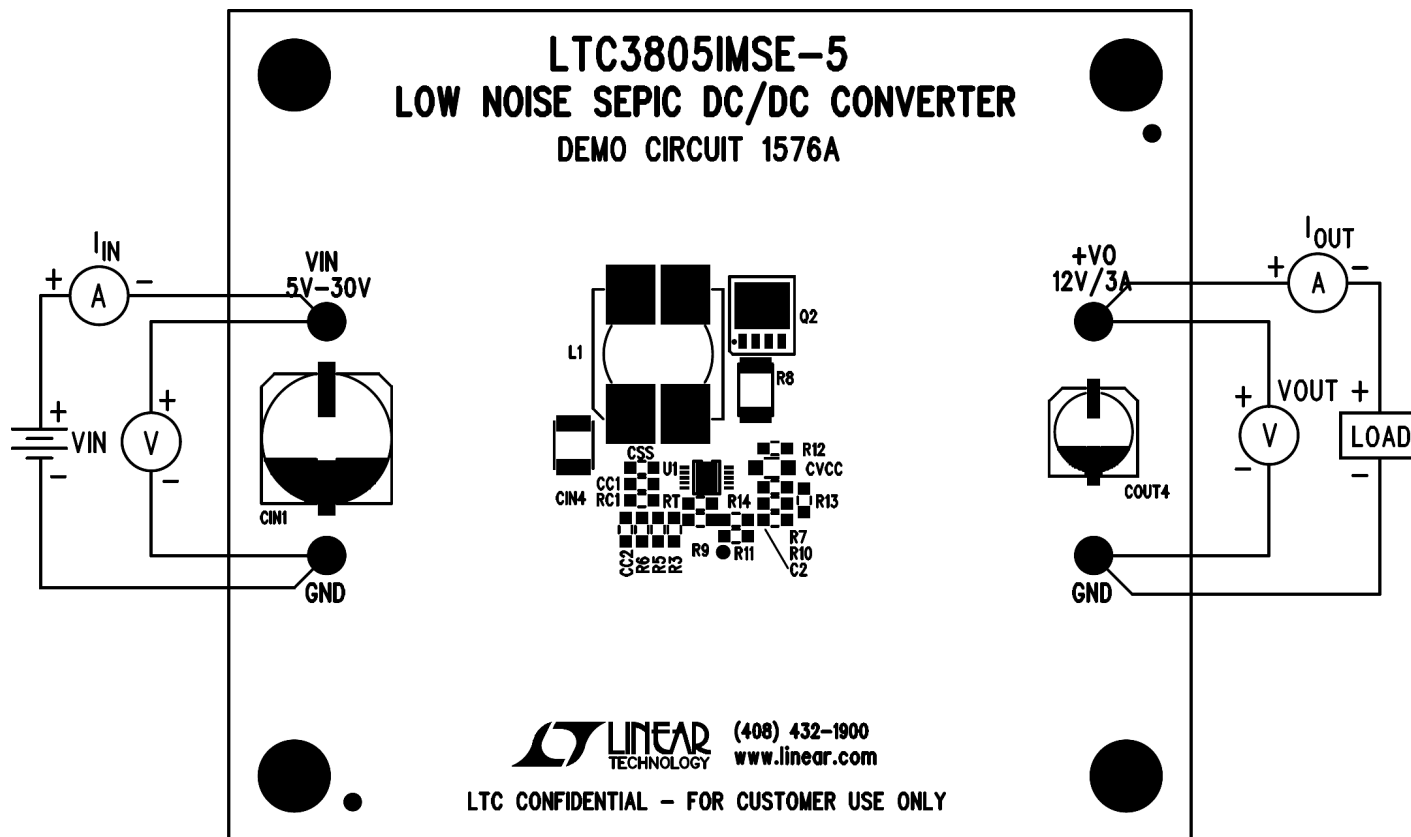


Figure 1. Proper Measurement Equipment Setup




Figure 2. Measuring Input or Output Ripple

CHANGING THE OUTPUT VOLTAGE

To set the output voltage lower than 12V, change the bottom voltage divider resistor connected to FB pin

of U1 (see the schematic on page 5). For example, to get 9V output, change R3 resistor value to 11k.

However, keep in mind that changing the transformer as well may increase the efficiency.

The optional Q1 circuit is used to get the circuit running. Once the circuit is running, the 12V output is used to bias U1 via D2. The startup circuit Q1 is turned off by pulling the emitter of Q1 above 7V. Please contact LTC factory for details.

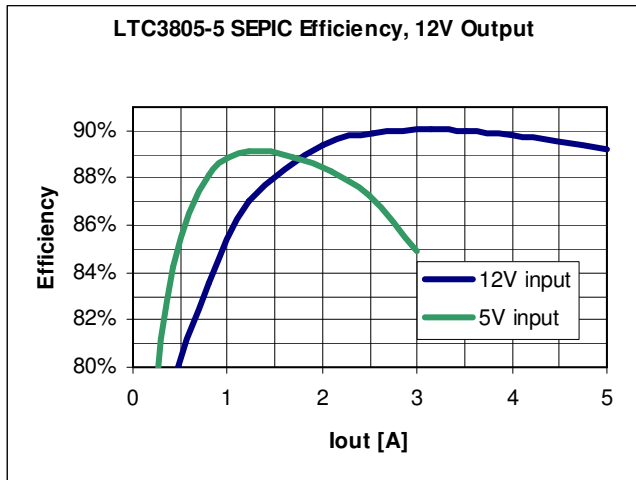


Figure 3. High efficiency of DC1576 allows the board to be used in thermally critical applications with outputs over 3A.

OUTPUT LOAD STEP RESPONSE

The load step response of DC1576 is very fast even though relatively small amount of output capacitance is present (100uF ceramic and 150uF electrolytic). The load step transients are shown in Figure 4. To improve load step response further or to reduce the output ripple, more output capacitance can be added. Low ESR output caps will have greatest effect on reducing the ripple and load step transients.

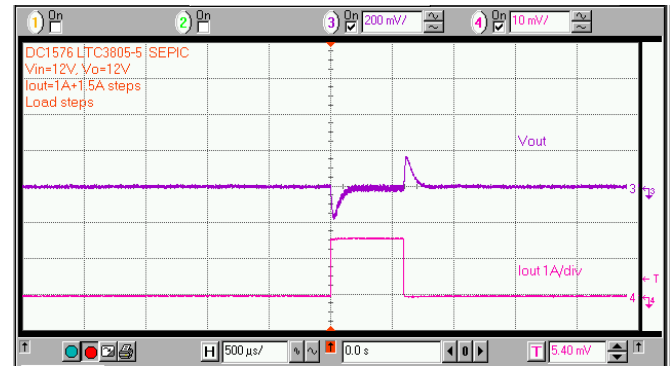


Figure 4. Fast transient response of DC1576 is achieved with a small amount of output capacitance.

SOFT START FUNCTION

The DC1576 features soft-start circuit that controls the inrush current and output voltage ramp at startup. The capacitor C_{SS} controls the startup period. The startup waveforms are shown in figure 5.


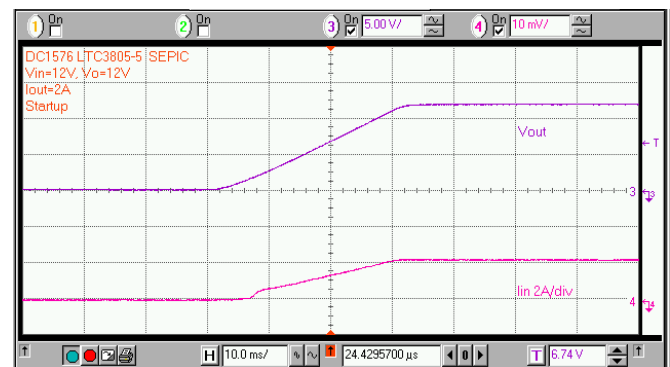


Figure 5. The DC1576 ramps the output slowly at startup without generating an input current surge.

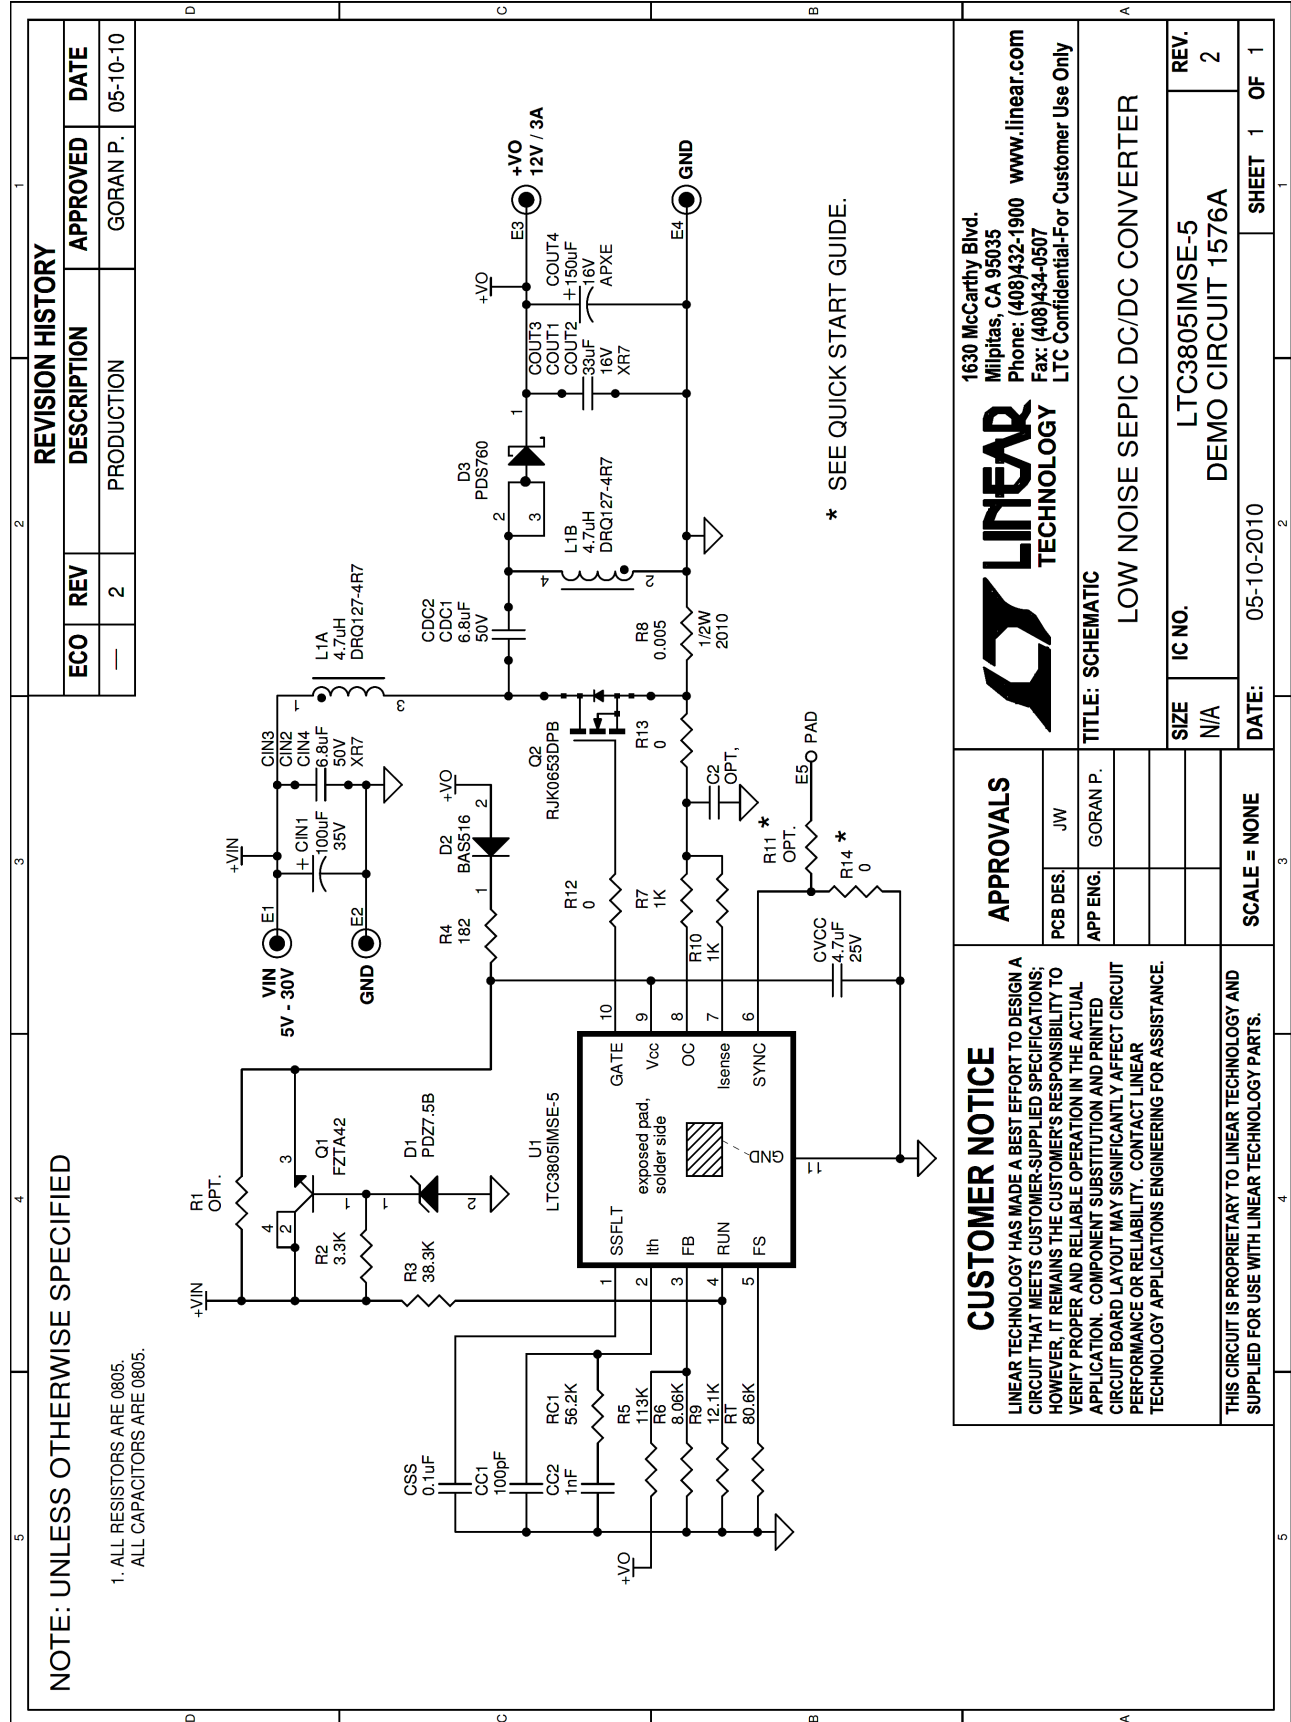

REQUIRED CIRCUIT COMPONENTS:

<i>Item</i>	<i>Qty</i>	<i>Reference</i>	<i>Part Description</i>	<i>Manufacturer / Part #</i>
1	1	CC1	CAP., X7R, 100pF, 50V, 10%, 0805	AVX, 08055C101KAT1A
2	1	CC2	CAP., C0G, 1000pF, 50V, 5%, 0805	TDK, C2012C0G1H102J
3	1	CIN1	CAP., HVH Series, 100uF 35V 20%	SUN ELECT., 35HVH100M
4	5	CIN2,CIN3,CIN4,CDC1,CDC2	CAP., X7R, 6.8uF, 50V, 20%, 1812	TDK, C4532X7R1H685M
5	3	COUT1,COUT2,COUT3	CAP., X5R, 33uF, 16V, 20%, 1812	TDK, C4532X5R1C336M
6	1	COUT4	CAP., ALUM., 150uF, 16V	NIPPON CHEMI-CON, APXE160ARA151MH80G
7	1	CSS	CAP., X7R, 0.1uF, 50V, 20%, 0805	AVX, 08055C104MAT2A
8	1	CVCC	CAP., X5R, 4.7uF, 25V, 20%, 0805	AVX, 08053D475MAT2A
9	1	D1	DIODE, VOLTAGE REGULATOR, 7.5V, SOD323	NXP, PDZ7.5B
10	1	D2	DIODE, HIGH-SPEED DIODE, SOD-523	NXP, BAS516
11	1	D3	DIODE, SCHOTTKY RECTIFIER 7A, POWERDI5	DIODES/ZETEX, PDS760-13
12	1	L1	IND., 4.7uH Coupled Inductor	COILTRONICS, DRQ127-4R7-R
13	1	Q1	XSTR, NPN, HIGH VOLTAGE, FZTA42, SOT223	DIODES/ZETEX, FZTA42TA
14	1	Q2	MOSFET, N-CH, POWER,	RENESAS RJK0653DPB
15	1	R1	RES., CHIP 100K 1/8W 5%, 0805	VISHAY, CRCW0805100KJNEA
16	1	R2	RES., CHIP 3.3K 1/8W 5%, 0805	VISHAY, CRCW08053K30JNEA
17	1	R3	RES., CHIP 38.3K 1/8W 1%, 0805	VISHAY, CRCW080538K3FKEA
18	1	R4	RES., CHIP 182 1/8W 1% 0805	VISHAY, CRCW0805182RFKEA
19	1	R5	RES., CHIP 113K 1/8W 1%, 0805	VISHAY, CRCW0805113KFKEA
20	1	R6	RES., CHIP 8.06K 1/8W 1%, 0805	VISHAY, CRCW08058K06FKEA
21	2	R7,R10	RES., CHIP 1K 1/8W 5%, 0805	VISHAY, CRCW08051K00JNEA
22	1	R8	RES., CHIP 0.005 OHMS 1/2W, 1%, 2010	VISHAY, WSL20105L000FEA
23	1	R9	RES., CHIP 12.1K 1/8W 1%, 0805	VISHAY, CRCW080512K1FKEA
24	3	R12,R13,R14	RES., CHIP 0 1/8W 0805	VISHAY, CRCW08050000Z0EA
25	1	RC1	RES., CHIP 56.2K 1/8W 1%, 0805	VISHAY, CRCW080556K2FKEA
26	1	RT	RES., CHIP 80.6K 1/8W 1%, 0805	VISHAY, CRCW080580K6FKEA
27	1	U1	IC, LTC3805IMSE-5	LINEAR TECH., LTC3805IMSE-5

ADDITIONAL DEMO BOARD CIRCUIT COMPONENTS:

1	0	C2 (OPT)	CAP., 0805	
2	0	R11 (OPT)	OPT.	

HARDWARE-FOR DEMO BOARD ONLY:

1	4	MTG 4 CORNERS	STAND-OFF, NYLON, 0.25" TALL (SNAP ON)	KEYSTONE, 8831 (SNAP ON)
---	---	---------------	--	--------------------------



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.