

LTC3553EPD: Micropower USB Power Manager with Li-Ion Charger, Buck DC/DC, and LDO Regulator

DESCRIPTION

Demonstration Circuit DC1550A is a Micropower USB Power Manager with Li-Ion Charger, Buck DC/DC, and LDO Regulator featuring the LTC[®]3553.

PERFORMANCE SUMMARY Specifications are at T_A = 25°C

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP	MAX	UNITS
VBUS	Bus Input Voltage Range		4.35		6	V
V(BAT)	Battery Float Voltage	Constant Voltage Mode	4.15		4.23	V
I(BAT)	Battery Charge Current	Constant Current Mode, R _{PROG} = 1.87k	420		500	mA
VLDO	LDO Output Voltage	I(VLDO) ≤ 200mA	3.25		3.35	V
VBUCK	Buck Regulator Output Voltage	I(VBUCK) ≤ 200mA	1.15		1.25	V

QUICK START PROCEDURE

Refer to Figure 1 for the proper measurement equipment setup and jumper settings and follow the procedure below.


NOTE. When measuring the input or output voltage ripple, care must be taken to avoid a long ground lead on the oscilloscope probe. Measure the input or output voltage ripple by touching the probe tip directly across the VBUS or VOUT(x) and GND terminals. See Figure 2 for proper scope probe technique.

1. Set PS1 = 0V, PS2 = 3.6V. Press “ON” button for > 0.5s. Observe I(BAT) (AM2), VBUCK (VM5) and VLDO (VM6).
The LTC3553 is in STBY which reduces the battery current to less than 15μA, even with both regulators running. In STBY the maximum current from regulators is reduced to as low as 10mA
2. Set STBY (JP6) to “OFF”, PS1 to 5V. Observe I(VBUS) (AM1), I(BAT) (AM2) and VPROG (VM2).

The LTC3553 is now operating in normal mode drawing more current from the battery. However the regulators are now capable of delivering over 200mA each. Also, since VBUS is now available, the battery charger is operating, but charge current is limited by the input current limit to 100mA.

3. Set HPWR (JP2) to “500mA”. Observe I(VBUS) (AM1), I(BAT) (AM2) and VPROG (VM2).
The input current limit is now 500mA, so the battery charger is delivering ~420mA to the battery.
4. Set LD2 to 200mA, LD3 to 200mA. Observe VBUCK (VM5), VLDO (VM6) and I(BAT) (AM2).
Each regulator is supplying 200mA, and since the efficiency is ~90%, drawing ~225mA. So, the battery charger is only delivering approximately 50mA. This is because the input current limit is 500mA – 225mA – 225mA = 50mA.

5. Set LD2 to 0A, LD3 to 0A. Press “OFF” button.
Observe VBUCK (VM5) and VLDO (VM6).
The regulators are now off and therefore supplying 0 current. The battery charger is once again supplying ~ 420mA to the battery.
6. Reset the Jumpers to their default position.

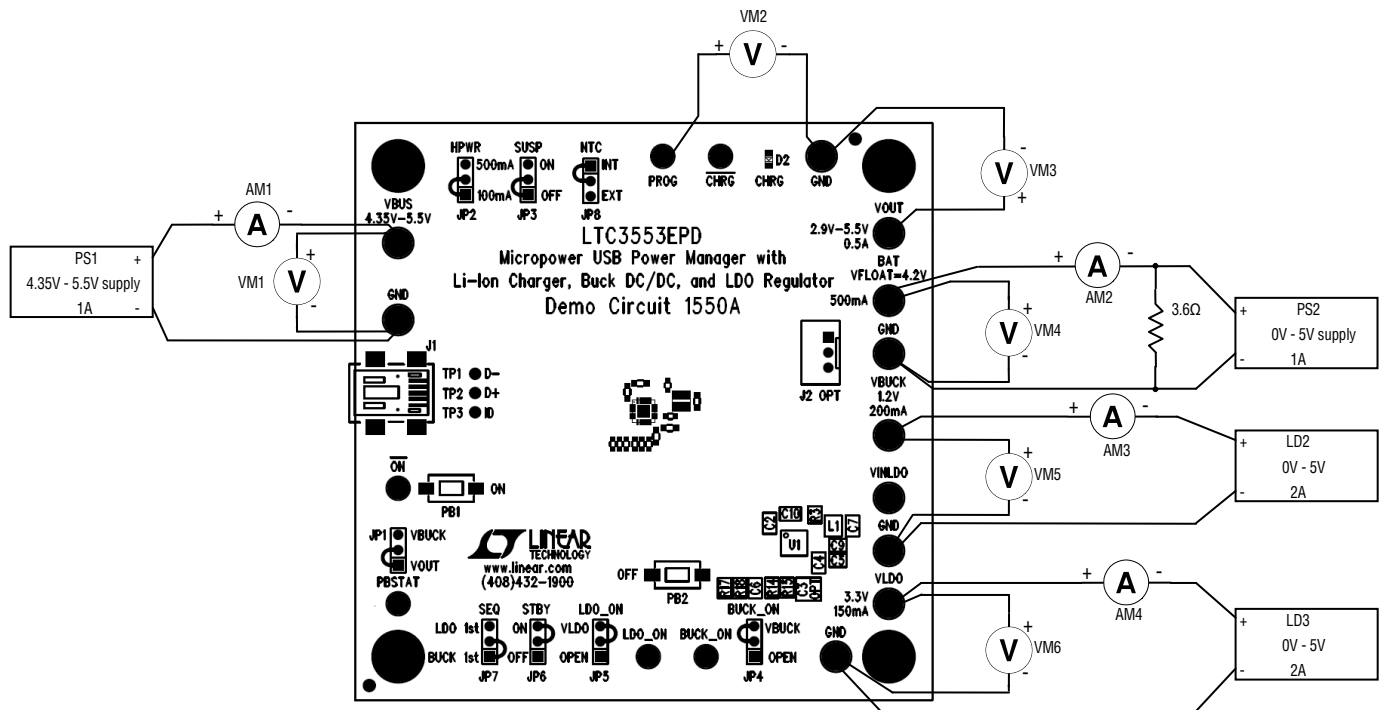

Note: All connections from equipment should be Kelvin connected directly to the board pins which they are connected on this diagram and any input or output leads should be twisted pair.

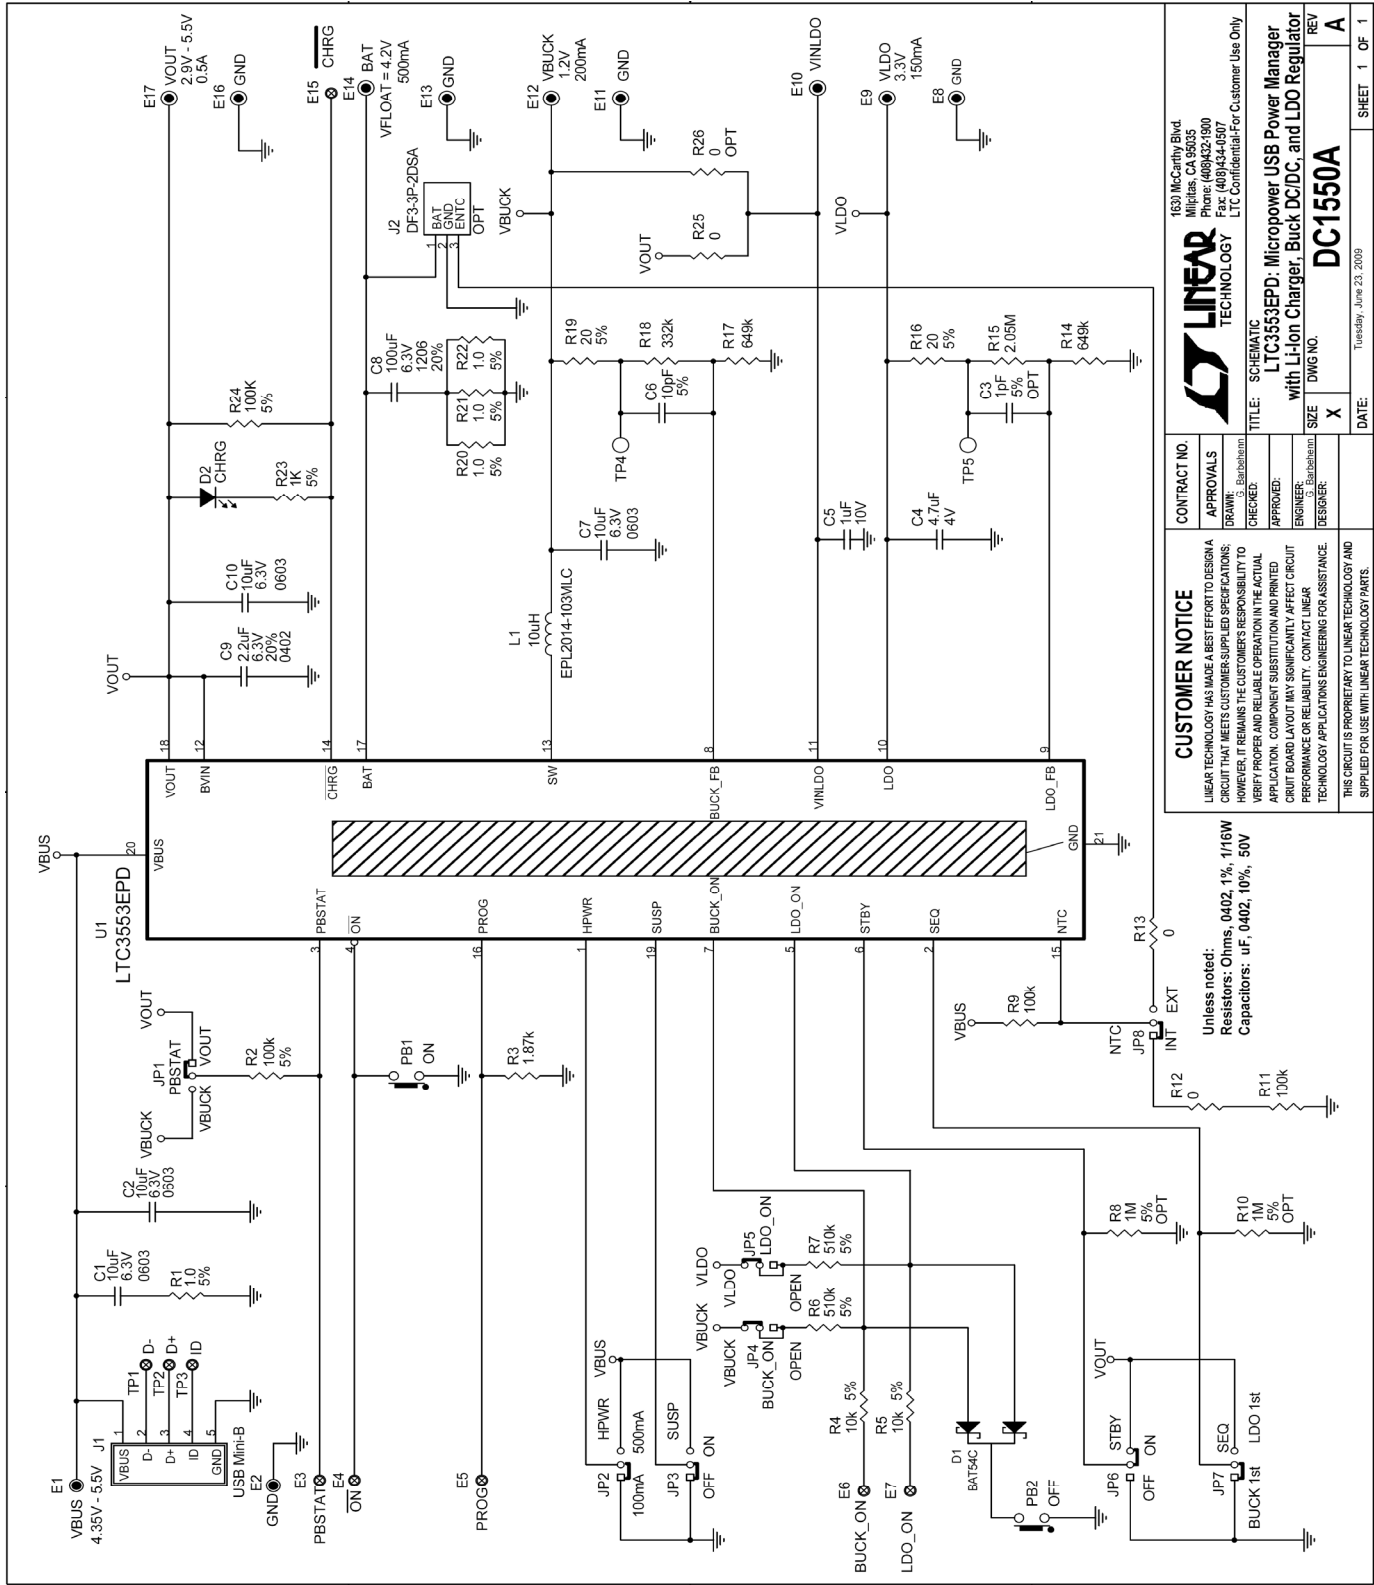


Figure 3. Circuit Schematic

	Qty	Reference	Part Description	Manufacture / Part #
REQUIRED CIRCUIT COMPONENTS:				
1	3	C2, C7, C10	CAP, CHIP, X5R, 10 μ F, $\pm$ 10%, 6.3V, 0603	TDK, C1608X5R0J106K
2	1	C4	CAP, CHIP, X5R, 4.7 μ F, $\pm$ 20%, 4V, 0402	MURATA, GRM155R60G475M
3	1	C5	CAP, CHIP, X5R, 1 μ F, $\pm$ 10%, 10V, 0402	MURATA, GRM155R61A105KE15D
4	1	C6	CAP, CHIP, C0G, 10pF, $\pm$ 5%, 50V, 0402	MURATA, GRM1555C1H100JZ01D
5	1	C9	CAP, CHIP, X5R, 2.2 μ F, $\pm$ 20%, 6.3V, 0402	MURATA, GRM155R60J225ME15D
6	1	L1	IND, SMT, 10 μ H, 459m Ω , $\pm$ 20%, 0.631A, 2mmX2mm	COILCRAFT, EPL2014-103MLC
7	1	R3	RES, CHIP, 1.87k Ω , $\pm$ 1%, 1/16W, 0402	VISHAY, CRCW04021K87FKED
8	2	R9, R11	RES, CHIP, 100k Ω , $\pm$ 1%, 1/16W, 0402	VISHAY, CRCW0402100KFKED
9	3	R12, R13, R25, R26-OPT	RES, CHIP, 0 Ω jumper, 1/16W, 0402	VISHAY, CRCW04020000Z0ED
10	2	R14, R17	RES, CHIP, 649k Ω , $\pm$ 1%, 1/16W, 0402	VISHAY, CRCW0402649KFKED
11	1	R15	RES, CHIP, 2.05MEG Ω , $\pm$ 1%, 1/16W, 0402	VISHAY, CRCW04022M05FKED
12	1	R18	RES, CHIP, 332k Ω , $\pm$ 1%, 1/16W, 0402	VISHAY, CRCW0402332KFKED
13	1	U1	Micropower USB Power Manager with Li-Ion Charger, Buck DC/DC, and LDO Regulator	LINEAR TECH., LTC3553EPD
ADDITIONAL DEMO BOARD CIRCUIT COMPONENTS:				
1	1	C1	CAP, CHIP, X5R, 10 μ F, $\pm$ 10%, 6.3V, 0603	TDK, C1608X5R0J106K
2	0	C3-OPT	CAP, CHIP, C0G, 1pF, $\pm$ 5%, 50V, 0402	VISHAY, VJ0402A1R0JXAA
3	1	C8	CAP, CHIP, X5R, 100 μ F, $\pm$ 20%, 6.3V, 1206	MURATA, GRM31CR60J107ME39L
4	1	D1	DIODE, Dual Schottky, 30V, 200mA, SOT23	DIODES INC., BAT54C
5	1	D2	LED, GREEN, 0603	LITE-ON, LTST-C190KGKT
6	4	R1, R20, R21, R22	RES, CHIP, 1 Ω , $\pm$ 5%, 1/16W, 0402	VISHAY, CRCW04021R00JNED
7	2	R2, R24	RES, CHIP, 100k Ω , $\pm$ 5%, 1/16W, 0402	VISHAY, CRCW0402100KJNED
8	2	R4, R5	RES, CHIP, 10k Ω , $\pm$ 5%, 1/16W, 0402	VISHAY, CRCW040210K0JNED
9	2	R6, R7	RES, CHIP, 510k Ω , $\pm$ 5%, 1/16W, 0402	VISHAY, CRCW0402510KJNED
10	0	R8-OPT, R10-OPT	RES, CHIP, 1MEG Ω , $\pm$ 5%, 1/16W, 0402	VISHAY, CRCW04021M00JNED
11	2	R16, R19	RES, CHIP, 20 Ω , $\pm$ 5%, 1/16W, 0402	VISHAY, CRCW040220R0JNED
12	1	R23	RES, CHIP, 1k Ω , $\pm$ 5%, 1/10W, 0603	VISHAY, CRCW06031K00JNED
HARDWARE FOR DEMO BOARD ONLY:				
1	11	E1, E2, E8, E9, E10, E11, E12, E13, E14, E16, E17	TURRET, 0.09"	MILLMAX, 2501-2
2	6	E3, E4, E5, E6, E7, E15	TURRET, 0.061"	MILLMAX, 2308-2
3	1	J1	CONN, USB Mini-B	TYCO, 1734035-2
4	0	J2-OPT	CONN, 3 Pin Polarized	HIROSE, DF3-3P-2DSA
5	8	JP1, JP2, JP3, JP4, JP5, JP6, JP7, JP8	HEADER, 3 Pin, 2mm	SAMTEC, TMM-103-02-L-S
6	8	JP1, JP2, JP3, JP4, JP5, JP6, JP7, JP8	SHUNT, 2mm	SAMTEC, 2SN-BK-G
7	2	PB1, PB2	SWITCH, N.O. Momentary, 3.5mmx6mm SMT	PANASONIC, EVQPPFA25
8	4		STAND-OFF, NYLON, 0.375"	KEYSTONE, 8832
9	1		FAB, PRINTED CIRCUIT BOARD	DEMO CIRCUIT 1550A
10	1		STENCIL-TOP	STENCIL #1550-1-TOP
11	1		STENCIL-BOTTOM	STENCIL #1550-1-BOTTOM

Figure 4. Bill of Materials



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.