

# QUICK START GUIDE FOR DEMONSTRATION CIRCUIT 760

## BOOST AND INVERTING DC/DC CONVERTERS

LT3472EDD

## DESCRIPTION

Demonstration circuit 760 is a Dual, 1.1MHz Boost/Inverter in 3mmx 3mm DFN featuring the LT3472EDD. The demo circuit demonstrates small size and low component count in a Boost Circuit and an Inverting Circuit. The Boost Converter is designed to convert a 2.7V-4.2V input to 15V output at 25mA-45mA load. The Inverting Circuit generates a -8V output at 35mA-65mA from the same input. Since the maximum Vin of the LT3472DD is 16V, this demo circuit will work well at higher inputs. The only limitation is the 10V rating of the input capacitor. The LT3472 features integrated Schottky diodes for both outputs and requires only one resistor (per output) to set the

output voltage. Both circuits are designed to demonstrate the capacitor programmable Soft-Start feature, advantages of the 1.1MHz constant switching frequency and the internal 36V switches. Both outputs on this demo circuit can be modified for higher voltages. These circuits are intended for space-conscious applications such as CCD Bias, TFT LCD Bias, OLED Bias and +/- Rail Generation for Op Amps.

**Design files for this circuit board are available. Call the LTC factory.**

LT is a trademark of Linear Technology Corporation

**Table 1. Performance Summary ( $T_A = 25^\circ\text{C}$ )**

PARAMETERS FOR 15V BOOST CIRCUIT	CONDITION	VALUE
Minimum Input Voltage		2.7V
Maximum Input Voltage		4.2V
Output Voltage $V_{\text{OUT}}$	$V_{\text{IN}} = 2.7\text{V}$ , $I_{\text{OUT}} = 0\text{mA}$ to $25\text{mA}$	$15\text{V} \pm 5\%$
Output Voltage $V_{\text{OUT}}$	$V_{\text{IN}} = 4.2\text{V}$ , $I_{\text{OUT}} = 0\text{mA}$ to $45\text{mA}$	$15\text{V} \pm 5\%$
Maximum Output Current	$V_{\text{in}} = 2.7\text{V}$	25mA
Maximum Output Current	$V_{\text{in}} = 4.2\text{V}$	45mA
Typical Output Ripple $V_{\text{OUT}}$	$V_{\text{IN}} = 3.3\text{V}$ , $I_{\text{OUT}} = 35\text{mA}$	$20\text{mV}_{\text{P-P}}$
Typical efficiency	$V_{\text{IN}} = 4.2\text{V}$ , $V_{\text{out}} = 15\text{V}$ @ $30\text{mA}$ and $-8\text{V}$ turned off	82%
PARAMETERS FOR -8V INVERTING CIRCUIT		VALUE
Output Voltage $V_{\text{OUT}}$	$V_{\text{IN}} = 2.7\text{V}$ , $I_{\text{OUT}} = 0\text{mA}$ to $35\text{mA}$	$-8\text{V} \pm 5\%$
Output Voltage $V_{\text{OUT}}$	$V_{\text{IN}} = 4.2\text{V}$ , $I_{\text{OUT}} = 0\text{mA}$ to $65\text{mA}$	$-8\text{V} \pm 5\%$
Maximum Output Current	$V_{\text{in}} = 2.7\text{V}$	35mA
Maximum Output Current	$V_{\text{in}} = 4.2\text{V}$	65mA
Typical Output Ripple $V_{\text{OUT}}$	$V_{\text{IN}} = 3.3\text{V}$ , $I_{\text{OUT}} = 50\text{mA}$	$10\text{mV}_{\text{P-P}}$
Typical efficiency	$V_{\text{IN}} = 4.2\text{V}$ , $V_{\text{out}} = 15\text{V}$ @ $0\text{mA}$ and $-8\text{V}$ @ $30\text{mA}$	71%

# QUICK START GUIDE FOR DEMONSTRATION CIRCUIT 760 BOOST AND INVERTING DC/DC CONVERTERS

## QUICK START PROCEDURE

Demonstration circuit 760A is easy to set up to evaluate the performance of the LT3472EDD. Refer to Figure 1 for proper measurement equipment setup and follow the procedure below:

**NOTE:** When measuring the input or output voltage ripple, care must be taken to avoid a long ground lead on the oscilloscope probe. Measure the input or output voltage ripple by touching the probe tip directly across the Vin or Vout and GND terminals. See Figure 2 for proper scope probe technique.

1. Place jumpers in the following positions:

**JP1** On

2. With power off, connect the input power supply to Vin and GND.
3. Turn on the power at the input.
4. Check for the proper output voltages.

**NOTE:** If there is no output, temporarily disconnect the load to make sure that the load is not set too high.

5. Once the proper output voltages are established, adjust the loads within the operating range and observe the output voltage regulation, ripple voltage, efficiency and other parameters.

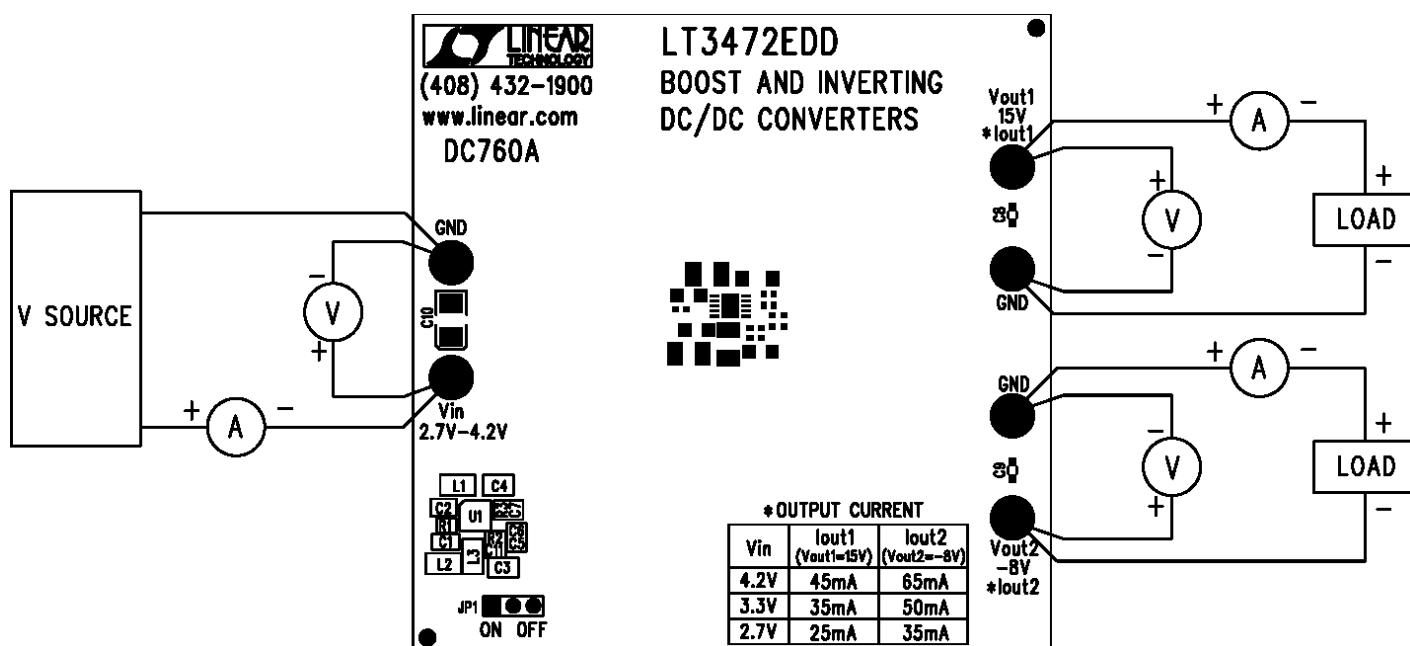


Figure 1. Proper Measurement Equipment Setup





Figure 2. Measuring Input or Output Ripple

# QUICK START GUIDE FOR DEMONSTRATION CIRCUIT 760

## BOOST AND INVERTING DC/DC CONVERTERS

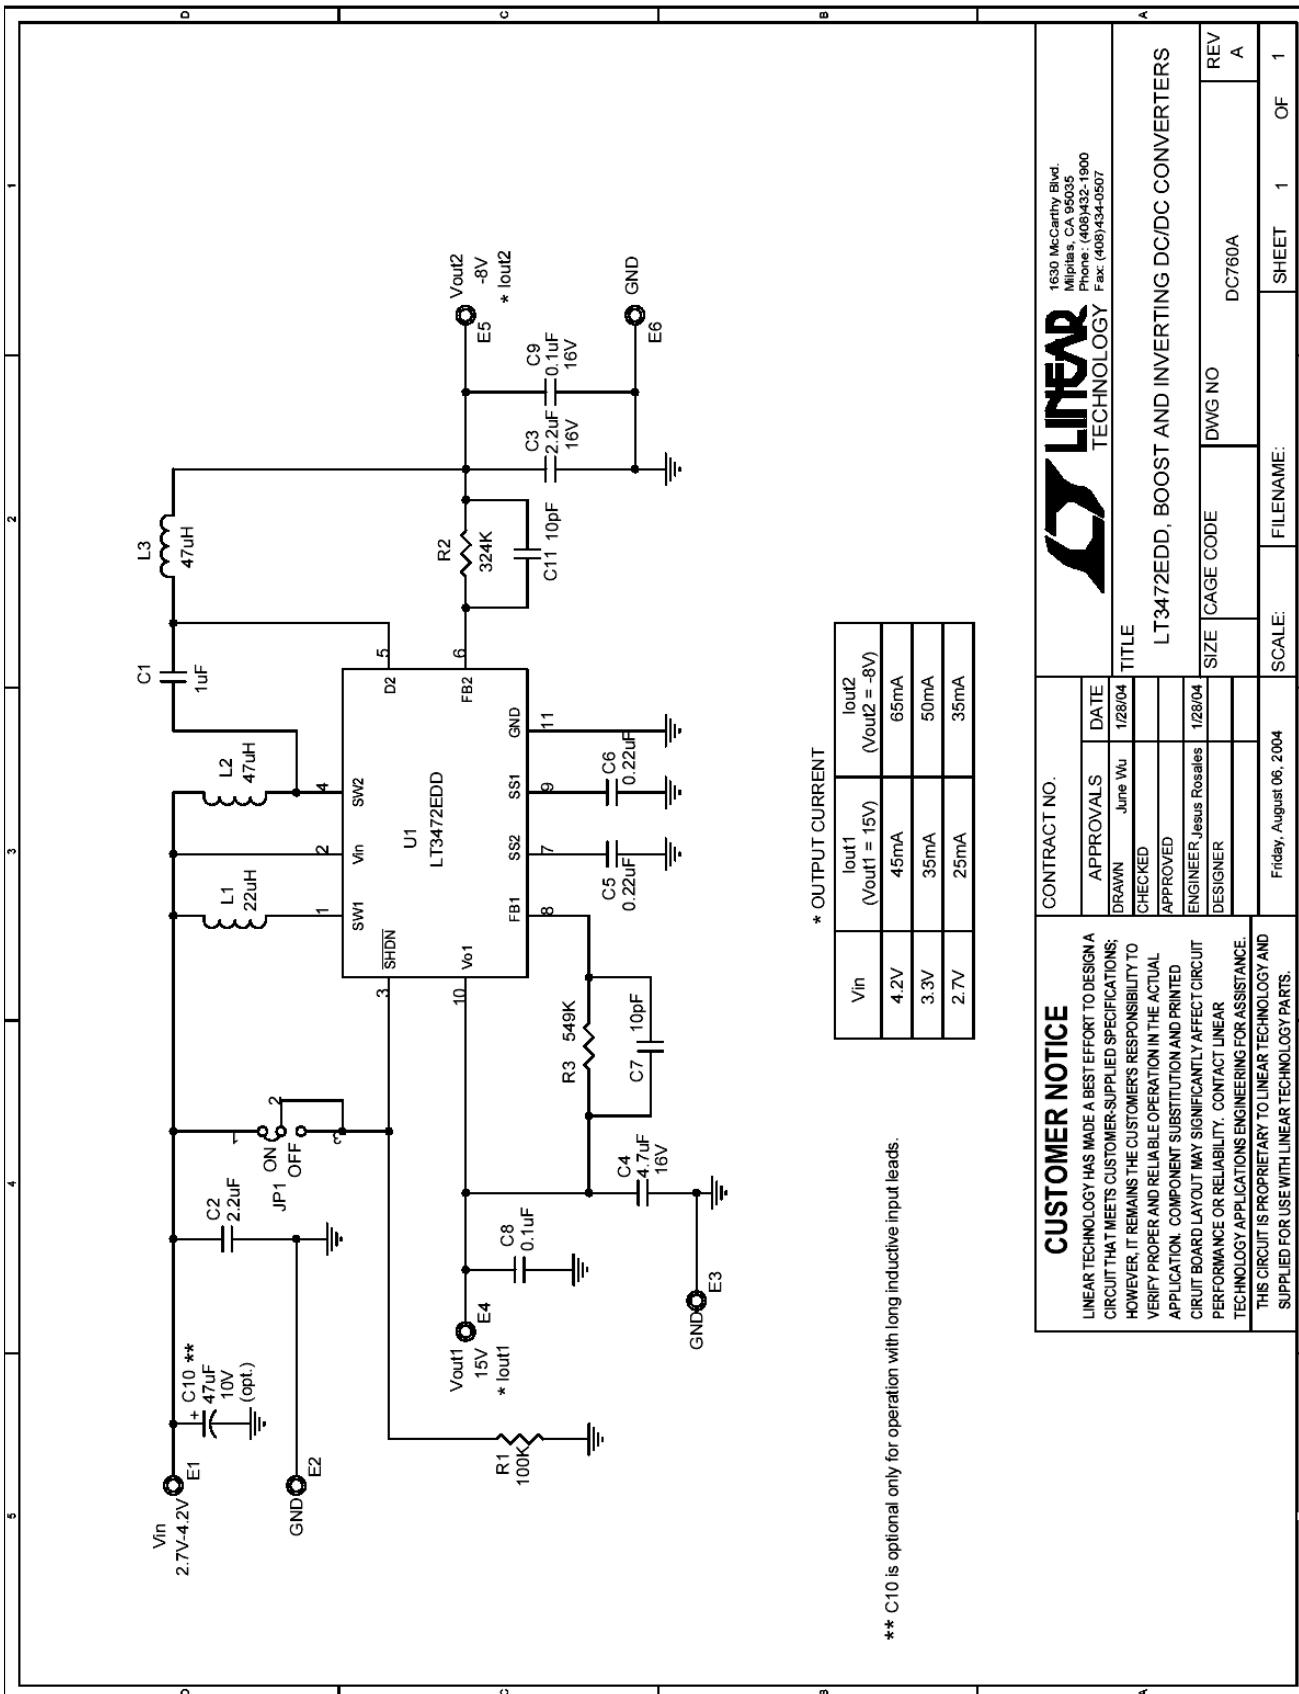

### CUSTOMER NOTICE

LINEAR TECHNOLOGY HAS MADE A BEST EFFORT TO DESIGN A CIRCUIT THAT MEETS CUSTOMER-SUPPLIED SPECIFICATIONS; HOWEVER, IT REMAINS THE CUSTOMER'S RESPONSIBILITY TO VERIFY PROPER AND RELIABLE OPERATION IN THE ACTUAL APPLICATION. COMPONENT SUBSTITUTION AND PRINTED CIRCUIT BOARD LAYOUT MAY SIGNIFICANTLY AFFECT CIRCUIT PERFORMANCE OR RELIABILITY. CONTACT LINEAR TECHNOLOGY APPLICATIONS ENGINEERING FOR ASSISTANCE. THIS CIRCUIT IS PROPRIETARY TO LINEAR TECHNOLOGY AND SUPPLIED FOR USE WITH LINEAR TECHNOLOGY PARTS.

### CONTRACT NO.

APPROVALS	DATE
DRAWN June Wu	12/8/04
CHECKED	
APPROVED	
ENGINEER: Jesus Rosales	12/8/04
DESIGNER	
TECHNOLOGY	

1630 McCarthy Blvd.  
Milpitas, CA 95035  
Phone: (408)434-1900  
Fax: (408)434-0507

L73472EDD, BOOST AND INVERTING DC/DC CONVERTERS

SIZE	CAGE CODE	DWG NO	REV
		DC760A	A

SCALE:	FILENAME:	SHEET	OF
		1	1



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

#### Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помошь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помошь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: [org@eplast1.ru](mailto:org@eplast1.ru)

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.