


24-Outlet Power Strip with Industrial Surge Protector, 15-ft. Cord, 1650 Joules, 72 in. length

MODEL NUMBER: **SS7619-15**

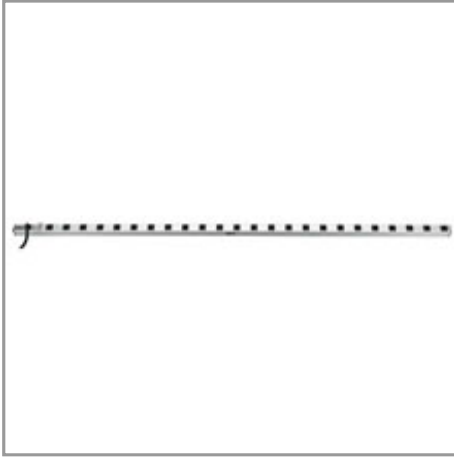

Highlights

- 24 outlets
- 15-ft. cord
- 72-in. length
- 1650-joule rating

Package Includes

- SS7619-15 Power Strip/Surge Suppressor
- Set of adjustable mounting clips
- Warranty information
- Instruction manual

Description

The SS7619-15 6-ft. power strip with AC surge suppression offers a convenient method of horizontal or vertical power distribution in equipment racks, computer rooms, workbenches, raceways and more. Includes 24 NEMA 5-15R output receptacles with 2.795-in. center-to-center spacing, 15-ft. AC line cord and adjustable mounting clips for installation in a wide variety of applications. Protects connected equipment from transient surges and line noise with built-in surge suppression rated at 1650 joules. Corded, multi-outlet strip reduces cabling clutter and enables the connection of multiple electrical devices to a single AC wall socket. Features rugged all-metal housing, lighted power switch with transparent guard to prevent accidental shutoff, 15A resettable circuit breaker and attractive gray color scheme.

PLUG/OUTLETS: Input: NEMA 5-15P/Output: 24 NEMA 5-15R

ELECTRICAL: 120V AC, 50/60Hz, 15A (Requires standard NEMA 5-15R wall receptacle)

FORMAT: 6-ft. corded vertical/raceway power distribution strip

SURGE SUPPRESSION: 1650 joules

Features

- Long 6-ft./72-in. strip offers convenient power distribution and surge suppression in equipment racks, computer rooms, workbenches, raceways and more
- Includes 24 NEMA 5-15R output receptacles with 2.795-in. center-to-center outlet spacing
- Lighted power switch with transparent snap-over guard to prevent accidental shutoff with integrated 15 amp circuit breaker
- Adjustable mounting clips support installation in a variety of applications
- UL1363/1449 - 400V (USA), cUL (Canada)
- 15A power handling capacity with circuit breaker
- 1650-joule AC surge suppression



- 15-ft. AC line cord

Specifications

OUTPUT	
Frequency Compatibility	50 / 60 Hz
Output Receptacles	(24) 5-15R
Output (Watts)	1800
Circuit Breaker (amps)	15A
Outlet Spacing	2.795-in. (center to center)
Right-Angle Outlets	0
INPUT	
Nominal Input Voltage(s) Supported	120V AC
Recommended Electrical Service	120V
Input Connection Type	NEMA 5-15P
Input Cord Length (ft.)	15
Input Cord Length (m)	4.57
Input Cord Gauge Type	14 gauge, SJT
Voltage Compatibility (VAC)	120
Maximum Surge Amps	22000
Right-Angle Plug	0
USER INTERFACE, ALERTS & CONTROLS	
Switches	Combination AC circuit breaker and lighted two-position power switch controls power to all outlets
Locking Switch Cover	Transparent locking switch cover prevents accidental shutoff
SURGE / NOISE SUPPRESSION	
AC Suppression Joule Rating	1650
UL1449 Let Through Rating	400V UL Verified
DATALINE SURGE SUPPRESSION	
Telephone/DSL Protection	0
Cable (Coax) Protection	0
Network (Ethernet) Protection	0



Tripp Lite
1111 W. 35th Street
Chicago, IL 60609 USA
Telephone: 773.869.1234
www.tripplite.com

PHYSICAL	
Unit Dimensions (hwd / in.)	72 x 1.5 x 1.5
Unit Dimensions (hwd / cm)	182.9 x 3.8 x 3.8
Material of Construction	Metal
Included Mounting Accessories	Set of adjustable mounting clamps
Receptacle Color	Black
Color (AC Line Cord)	Black
Outlets Measurement (Center to Center)	69mm
CERTIFICATIONS	
UL1449 3rd Edition (AC Suppression)	UL1449 3rd Edition
UL1363 (Power Tap)	UL1363
cUL / CSA (Canada)	cUL
WARRANTY	
Product Warranty Period (Worldwide)	Lifetime limited warranty

© 2017 Tripp Lite. All rights reserved. All product and company names are trademarks or registered trademarks of their respective holders. Use of them does not imply any affiliation with or endorsement by them. Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice. Tripp Lite uses primary and third-party agencies to test its products for compliance with standards. See a list of Tripp Lite's testing agencies: <https://www.tripplite.com/products/product-certification-agencies>



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.