

QUICK START GUIDE FOR DEMONSTRATION CIRCUIT 849B

750MA, 1.2MHZ SYNCHRONOUS BOOST CONVERTER

LTC3499BEDD

DESCRIPTION

Demonstration circuit 849B is a 750mA, 1.2MHz Synchronous Boost Converter with Reverse Battery Protection featuring the LTC®3499BEDD. The demo board demonstrates a DC/DC boost converter, with a 750mA switch current limit, providing a 3.3V output at 250mA from a two cell input voltage, or a 5V output at 170mA from either a two cell or a Li-Ion battery. **The LTC3499BEDD offers integrated reverse battery protection up to -6V for both the part and the load, drawing typically less than 1uA of current.** The input voltage of this supply can also be increased higher than the output, but thermal limitations reduce the output current that can be delivered. See **V_{IN}>V_{OUT} Operation** section on the datasheet. The

circuit also demonstrates the advantages of output disconnect and inrush current limiting. Small circuit size and low component count make the LTC3499BEDD suitable for use in many space-conscious applications such as Medical Equipment, Digital Cameras, MP3 Players, and other Portable Devices. Other integrated features include peak current limit, soft-start, antiringing control and thermal shutdown.

Design files for this circuit board are available. Call the LTC factory.

LTC is a trademark of Linear Technology Corporation

Table 1. Performance Summary ($T_A = 25^\circ\text{C}$) 3.3V Output

| PARAMETERS | CONDITION | VALUE |
|--|---|---------------------|
| Minimum Input Voltage | | 1.8V |
| Maximum Input Voltage | | 3V |
| Output Voltage V _{OUT} | V _{IN} = 1.8V, I _{OUT} = 0mA to 250mA | 3.3V ±3% |
| Output Voltage V _{OUT} | V _{IN} = 3.0V, I _{OUT} = 0mA to 500mA | 3.3V ±3% |
| Typical Output Ripple V _{OUT} | V _{IN} = 1.8V, I _{OUT} = 250mA | 20mV _{P-P} |
| Typical Efficiency | V _{IN} = 2.4V, I _{OUT} = 160mA | 90% |

Table 2. Performance Summary ($T_A = 25^\circ\text{C}$) 5V Output

| PARAMETERS | CONDITION | VALUE |
|--|---|---------------------|
| Minimum Input Voltage | | 1.8V |
| Maximum Input Voltage | | 4.2V |
| Output Voltage V _{OUT} | V _{IN} = 1.8V, I _{OUT} = 0mA to 170mA | 5V ±3% |
| Output Voltage V _{OUT} | V _{IN} = 2.7V, I _{OUT} = 0mA to 270mA | 5V ±3% |
| Output Voltage V _{OUT} | V _{IN} = 4.2V, I _{OUT} = 0mA to 480mA | 5V ±3% |
| Typical Output Ripple V _{OUT} | V _{IN} = 2.7V, I _{OUT} = 270mA | 22mV _{P-P} |
| Typical efficiency | V _{IN} = 2.7V, I _{OUT} = 160mA | 88% |

QUICK START GUIDE FOR DEMONSTRATION CIRCUIT 849B

750mA, 1.2MHz SYNCHRONOUS BOOST CONVERTER

QUICK START PROCEDURE

Demonstration circuit 849B is easy to set up to evaluate the performance of the LTC3499BEDD. Refer to Figure 1 for proper measurement equipment setup and follow the procedure below:

NOTE: When measuring the input or output voltage ripple, care must be taken to avoid a long ground lead on the oscilloscope probe. Measure the input or output voltage ripple by touching the probe tip directly across the VIN or VOUT and GND terminals. See Figure 2 for proper scope probe technique.

1. Place jumpers in the following positions:

JP1 Run.

JP2 3.3V or 5V (depending on output desired)

2. With power off, connect the input power supply to VIN and GND.
3. Turn on the power at the input.
4. Check for the proper output voltages.

NOTE: If there is no output, temporarily disconnect the load to make sure that the load is not set too high.

NOTE: Once the proper output voltages are established, adjust the loads within the operating range and observe the output voltage regulation, ripple voltage, efficiency and other parameters.

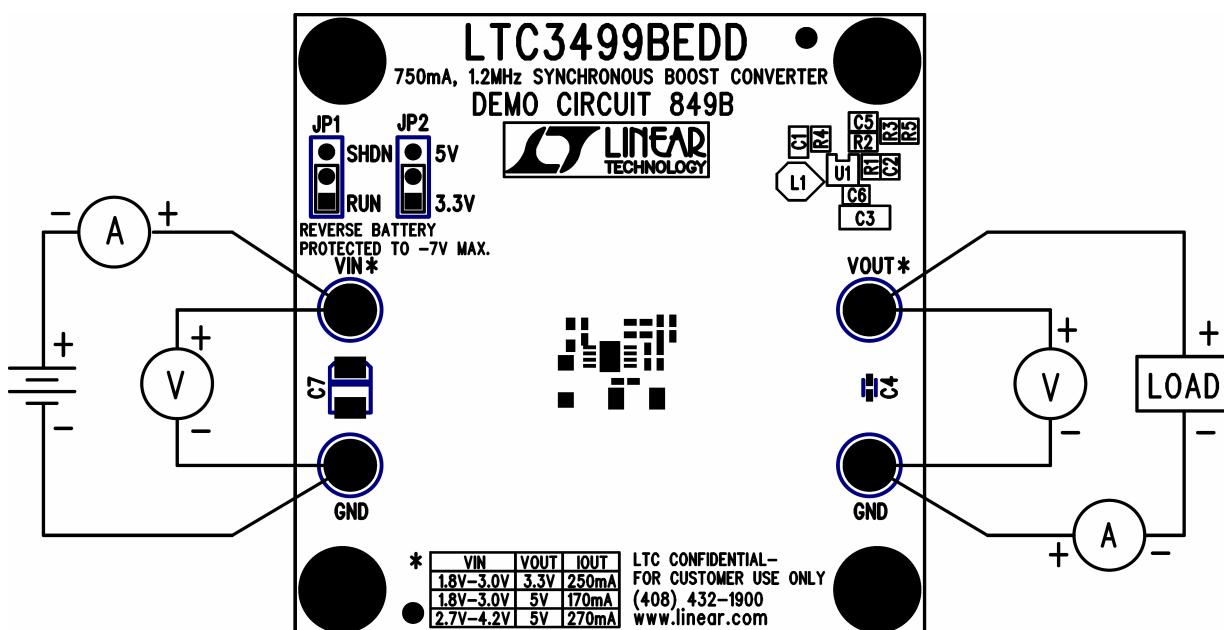


Figure 1. Proper Measurement Equipment Setup





Figure 2. Measuring Input or Output Ripple

QUICK START GUIDE FOR DEMONSTRATION CIRCUIT 849B

750mA, 1.2MHz SYNCHRONOUS BOOST CONVERTER

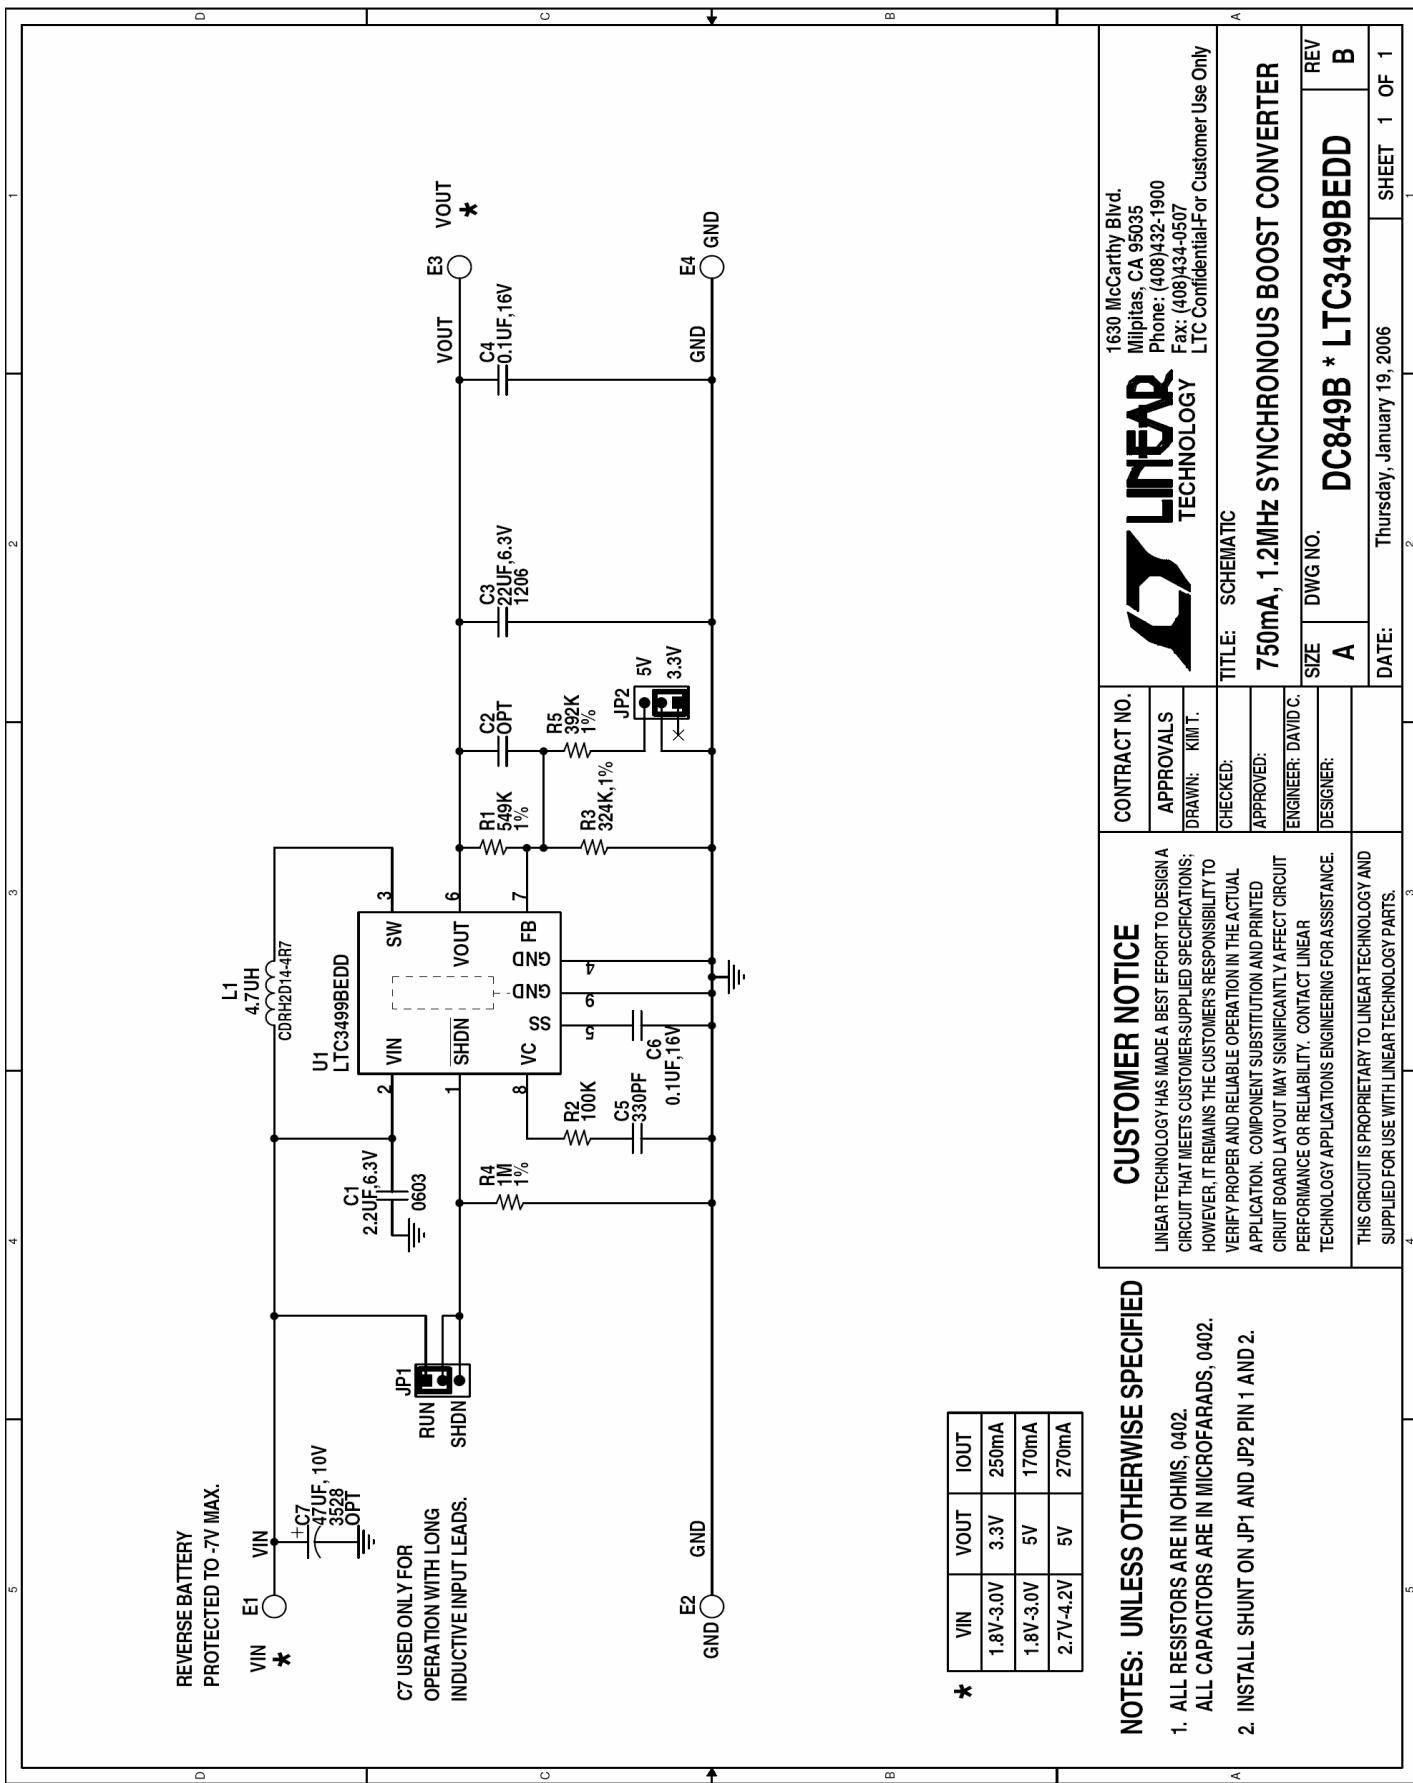

CUSTOMER NOTICE

CONTRACT NO.

APPROVALS

DRAWN:

KIM T.

CHECKED:

APPROVED:

ENGINEER: DAVID C.

DESIGNER:

LINEAR TECHNOLOGY

TITLE: SCHEMATIC

750mA, 1.2MHz SYNCHRONOUS BOOST CONVERTER

THIS CIRCUIT IS PROPRIETARY TO LINEAR TECHNOLOGY AND

SUPPLIED FOR USE WITH LINEAR TECHNOLOGY PARTS.

1630 McCarthy Blvd.

Milpitas, CA 95035

Phone: (408)432-1900

Fax: (408)434-0507

LTC Confidential For Customer Use Only

DATE: Thursday, January 19, 2006

1 OF 1

SIZE A

DWG NO.

DC849B * LTC3499BEDD

REV B



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помошь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помошь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.