


Low standby loss front-end with inrush current limitation and insulated AC switch control

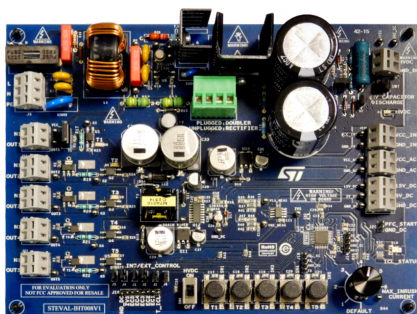

Features

- Fully electronic solution without the need for an inrush current limiter resistor and bulky by-pass electromechanical relay
- DC bus disconnection at standby to reduce loss below 0.3 W
- Inrush current compliant with IEC61000-3-3
- Operation allowed with PFC (continuous or discontinuous)
- EN 55015, IEC 61000-4-11 compliant
- Criteria A @ 2 kV IEC 61000-4-5 and @ 4 kV IEC 61000-4-4
- Insulated control of AC switches used to drive AC loads for residential appliances
- RoHS compliant

Description

The [STEVAL-IHT008V1](#) evaluation board limits the inrush current charging a DC bus capacitor so that it is compliant with the IEC 61000-3-3 standard. This inrush current is based on a soft-start procedure for the rectifier bridge achieved with a [T1635T-8FP](#) Triac added in series with the mains line, which is controlled by the [STM8S103K3](#) microcontroller through progressive phase-control during the startup phase.

This solution drastically reduces standby losses as the DC bus can be totally disconnected from the AC mains when it is not required. The DC bus is easily turned off by turning off the series Triac, without needing an additional relay to open the circuit in standby.

Steady-state losses are also reduced because NTC resistors, traditionally used to limit inrush current, are not required; nor are the corresponding relays to bypass them.

This board also demonstrates that AC loads can be driven with an easy-design isolated solution using the same power supply for the whole system and some opto-transistors to control the [ACST210-8FP](#), [ACS108-8SN](#) and [Z0109MUF](#) AC switches.

Product summary	
STEVAL-IHT008V1 evaluation board	STEVAL-IHT008V1
STEVAL-IHT008V1 evaluation board firmware	STSW-IHT008
Mainstream Access line 8-bit MCU with 8 Kbytes Flash, 16 MHz CPU, integrated EEPROM	STM8S103K3
16 A Snubberless Triac	T1635T-8FP
Overvoltage protected AC switch	ACS108-8SN
Overvoltage protected AC switch	ACST210-8FP
1 A Triacs	Z0109MUF

1 Schematic diagram



Figure 2. STEVAL-IHT008V1 power and insulated control schematic



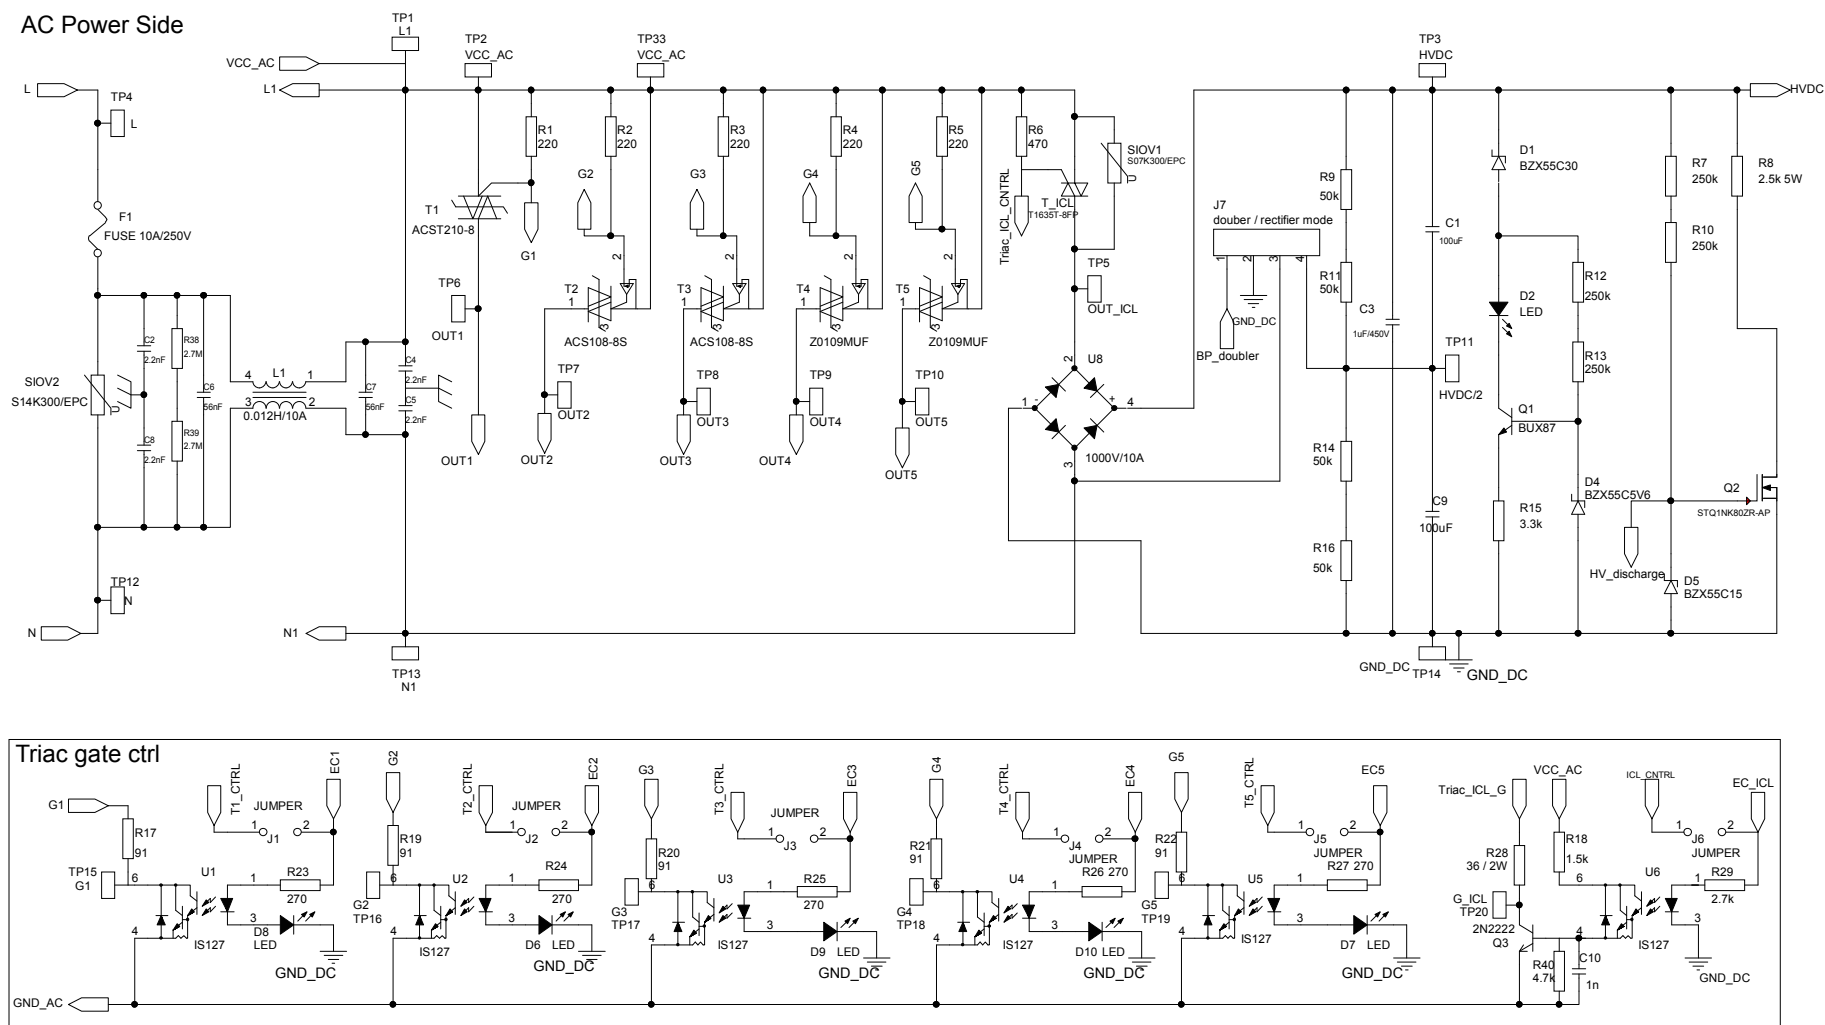


Figure 3. STEVAL-IHT008V1 control circuit schematic (1 of 3)


AC Line and VDC measurement

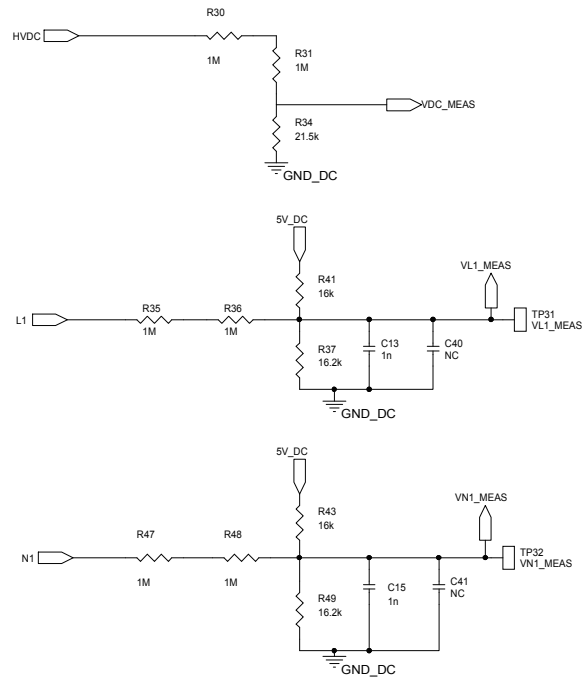

ZVS Detection

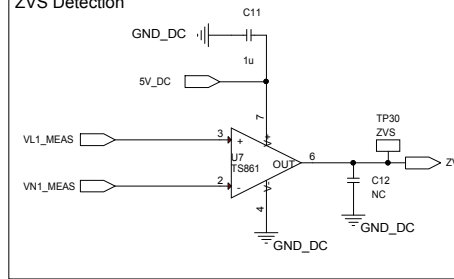

Max Inrush current order

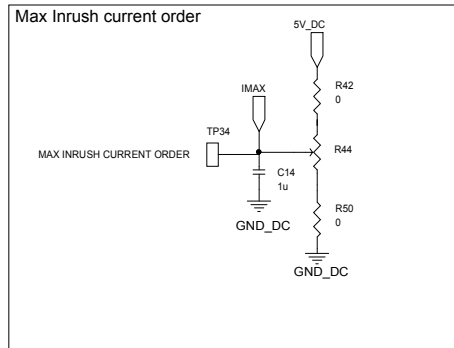

MCU


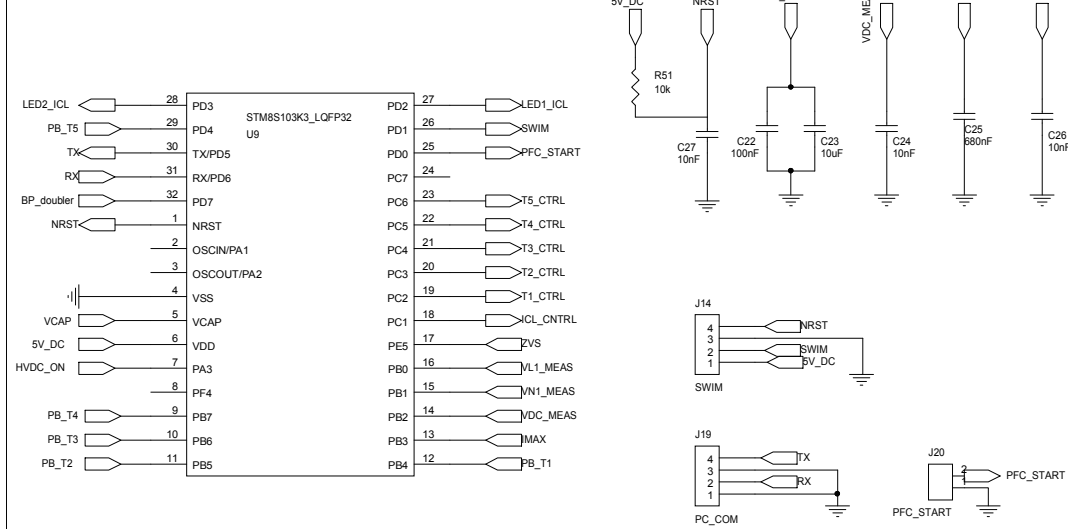


Figure 4. STEVAL-IHT008V1 control circuit schematic (2 of 3)

External_connectors

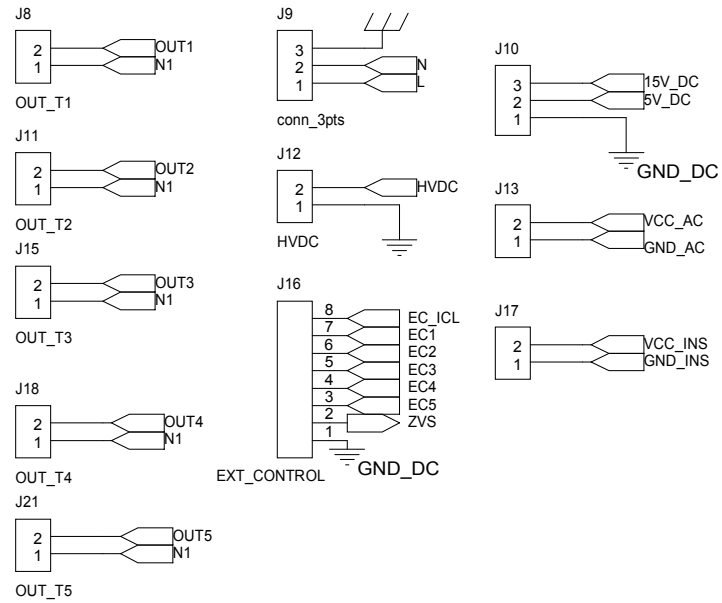

HV_capacitor discharge



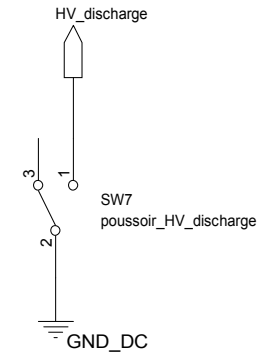


Figure 5. STEVAL-IHT008V1 control circuit schematic (3 of 3)


Push Buttons

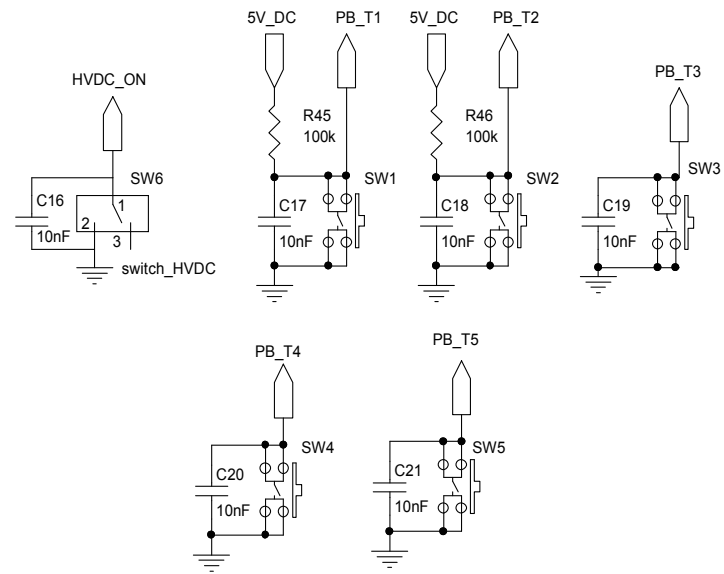

Status LEDs

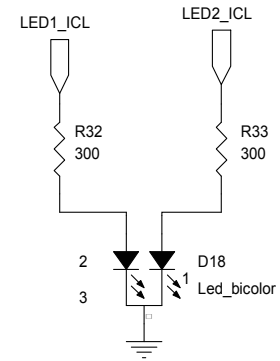

DC Power Supply

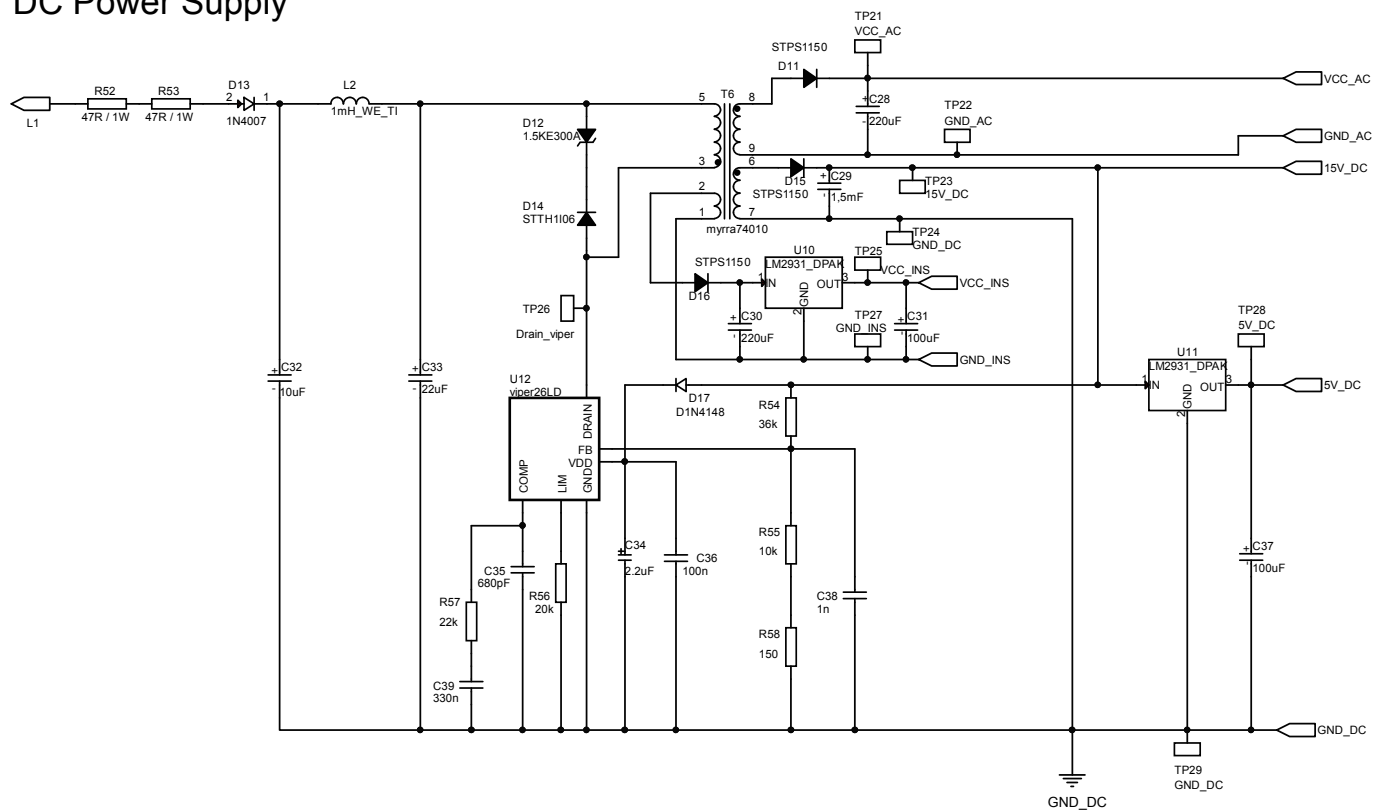

Revision history

Table 1. Document revision history

Date	Version	Changes
01-Feb-2016	1	Initial release.
06-Feb-2019	2	Added cover page product summary table. Updated cover page description Minor text and formatting changes

IMPORTANT NOTICE – PLEASE READ CAREFULLY

STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST's terms and conditions of sale in place at the time of order acknowledgement.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of Purchasers' products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2019 STMicroelectronics – All rights reserved



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.