

QUICK START GUIDE FOR DEMONSTRATION CIRCUIT 625

1MHZ, 1A SYNCHRONOUS BUCK-BOOST CONVERTER

LTC3441

DESCRIPTION

Demonstration Circuit 625 is a constant-frequency synchronous Buck-Boost converter using the LTC3441. The input range is from 2.4V to 5.5V, making it ideal for single-cell lithium-ion or three-cell NiCd/NiMH battery applications. This converter provides up to 95% efficiency, much higher than traditional Buck-Boost converters. For 2.5V minimum input voltage, this converter can provide up to 1A load current.

The output voltage is set at 3.3V. A different output voltage in the range of 2.4V to 5.25V can be obtained by changing one of the feedback resistors. The switching frequency is set at 1MHz, which is a good trade-off between efficiency and size. Applying twice the desired

frequency at the MODE/SYNC pin can also synchronize the switching frequency between 1.15MHz to 1.7MHz. In shutdown, the IC draws less than 1 μ A.

When using long wire connections to the input sources (such as wall adaptors), there can be input over voltage transients during initial plug-in. C8 is installed on DC625 to damp the possible voltage transients. C8 is not needed for any application when input source is close to the regulator. Please refer to Application Note 88 for details.

Design files for this circuit board are available. Call the LTC factory.

Table 1. Performance Summary ($T_A = 25^\circ\text{C}$ unless otherwise noted)

| PARAMETER | CONDITION | VALUE |
|--|--|---------------------------------------|
| Minimum Input Voltage | -40°C to 85°C | 2.4V (2.5V minimum input for 1A load) |
| Maximum Input Voltage | -40°C to 85°C | 5.5V |
| Output Voltage V_{OUT} | $V_{\text{IN}} = 2.5\text{V}$ to 5.25V , $I_{\text{OUT}} = 0\text{A}$ to 1A | $3.3\text{V} \pm 3\%$ |
| Maximum Output Current | $V_{\text{IN}} = 2.5\text{V}$ to 5.25V | 1A |
| Typical Output Ripple V_{OUT} | $V_{\text{IN}} = 3.0\text{V}$, $I_{\text{OUT}} = 1\text{A}$ (20MHz BW) | 40mV _{P-P} |
| Typical Switching Frequency | | 1MHz |
| Efficiency | $V_{\text{IN}} = 4.2\text{V}$, $I_{\text{OUT}} = 0.2\text{A}$ $V_{\text{IN}} = 4.2\text{V}$, $I_{\text{OUT}} = 1\text{A}$ | 94% Typical 89% Typical |
| On/Off Control | Logic Low Voltage-Off, -40°C to 85°C | 0.4V MAX |
| | Logic High Voltage-On | 2.4V MIN |

QUICK START PROCEDURE

Demonstration circuit 625 is easy to set up to evaluate the performance of the LTC3441. Refer to Figure 1 for proper measurement equipment setup and follow the procedure below:

NOTE: When measuring the input or output voltage ripple, care must be taken to avoid a long ground lead on the oscilloscope probe. Measure the input or output voltage ripple by touching the probe tip directly across the V_{in}

QUICK START GUIDE FOR DEMONSTRATION CIRCUIT 625 1MHZ, 1A SYNCHRONOUS BUCK-BOOST CONVERTER

or Vout and GND terminals. See Figure 2 for proper scope probe technique.

1. Place jumpers in the following positions:

JP1 RUN

JP2 FIXED FREQ.

2. With power off, connect the input power supply to Vin and GND.
3. Turn on the power at the input.

NOTE: Make sure that the input voltage does not exceed 5.5V.

4. Check for the proper output voltage. Vout = 3.2V to 3.4V.

NOTE: If there is no output, temporarily disconnect the load to make sure that the load is not set too high.

5. Once the proper output voltage is established, adjust the load within the operating range and observe the output voltage regulation, ripple voltage, efficiency and other parameters.

Linear Tech. Corp.
Demo Circuit 625 RevA

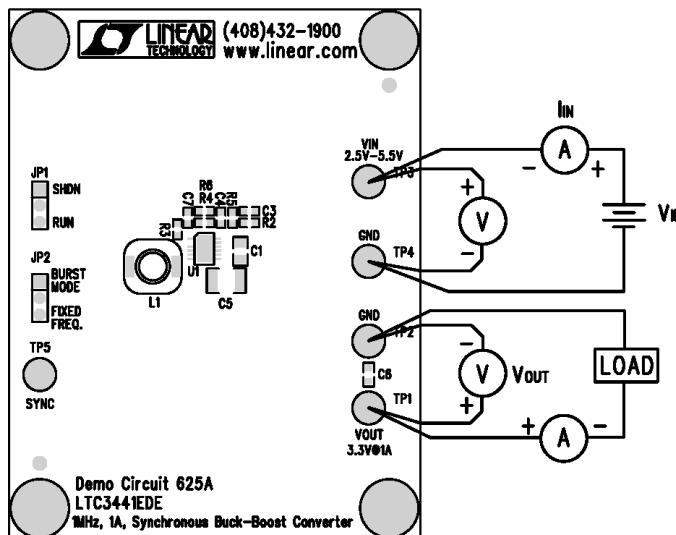


Figure 1. Proper Measurement Equipment Setup

QUICK START GUIDE FOR DEMONSTRATION CIRCUIT 625

1MHZ, 1A SYNCHRONOUS BUCK-BOOST CONVERTER

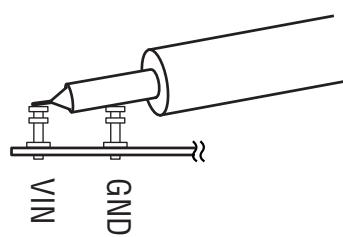


Figure 2. Measuring Input or Output Ripple

GRAPHICS

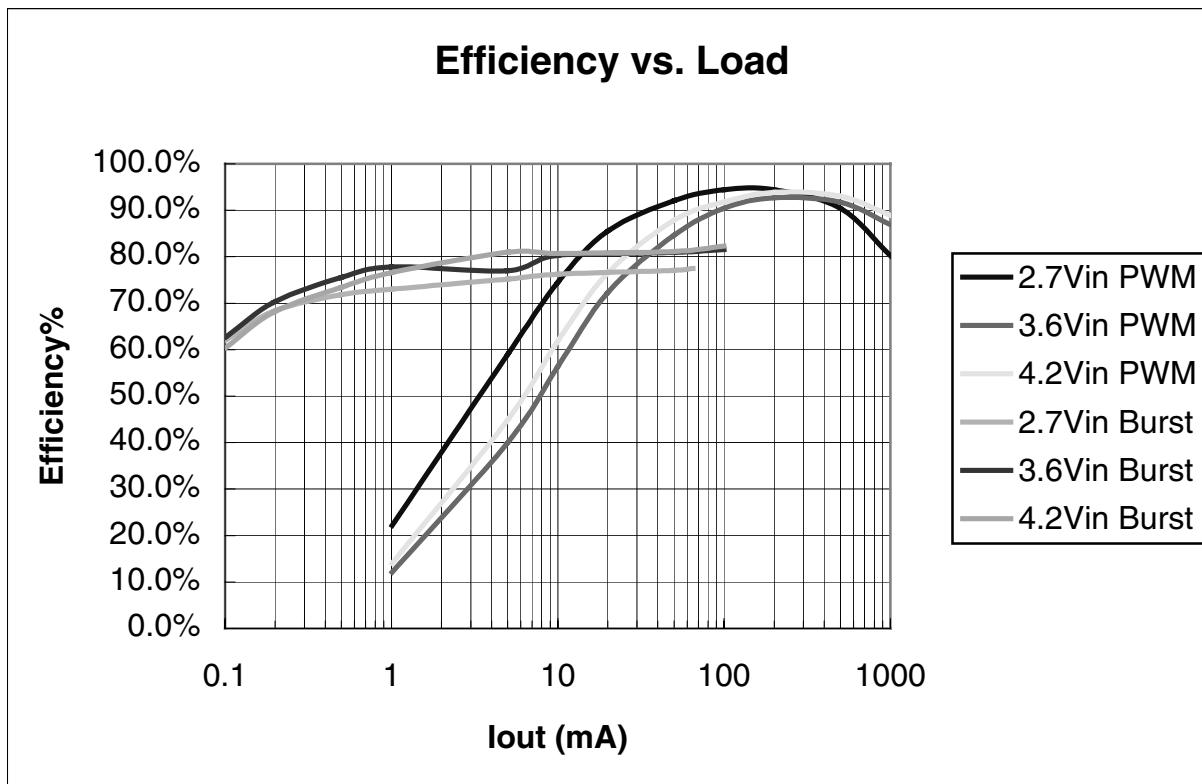


Figure 3. Efficiency of DC625

QUICK START GUIDE FOR DEMONSTRATION CIRCUIT 625

1MHZ, 1A SYNCHRONOUS BUCK-BOOST CONVERTER


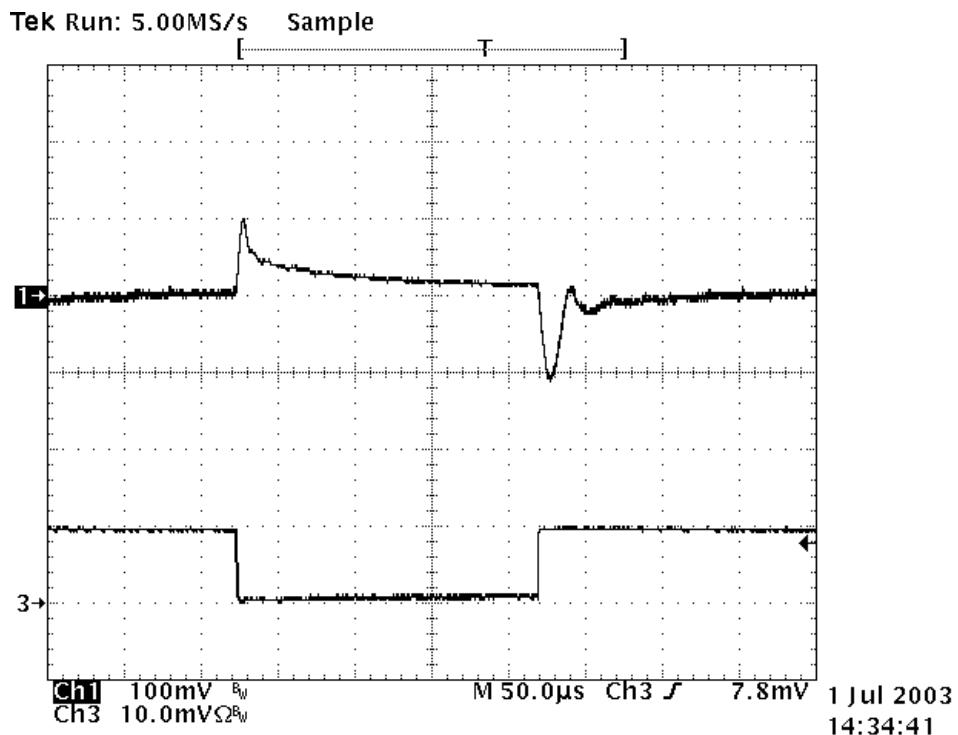


Figure 4. Load Transient Response (Vin=3V;Channel 1: Vout; Channel 2: Iout: load step from 100mA to 1A)

QUICK START GUIDE FOR DEMONSTRATION CIRCUIT 625

1MHZ, 1A SYNCHRONOUS BUCK-BOOST CONVERTER

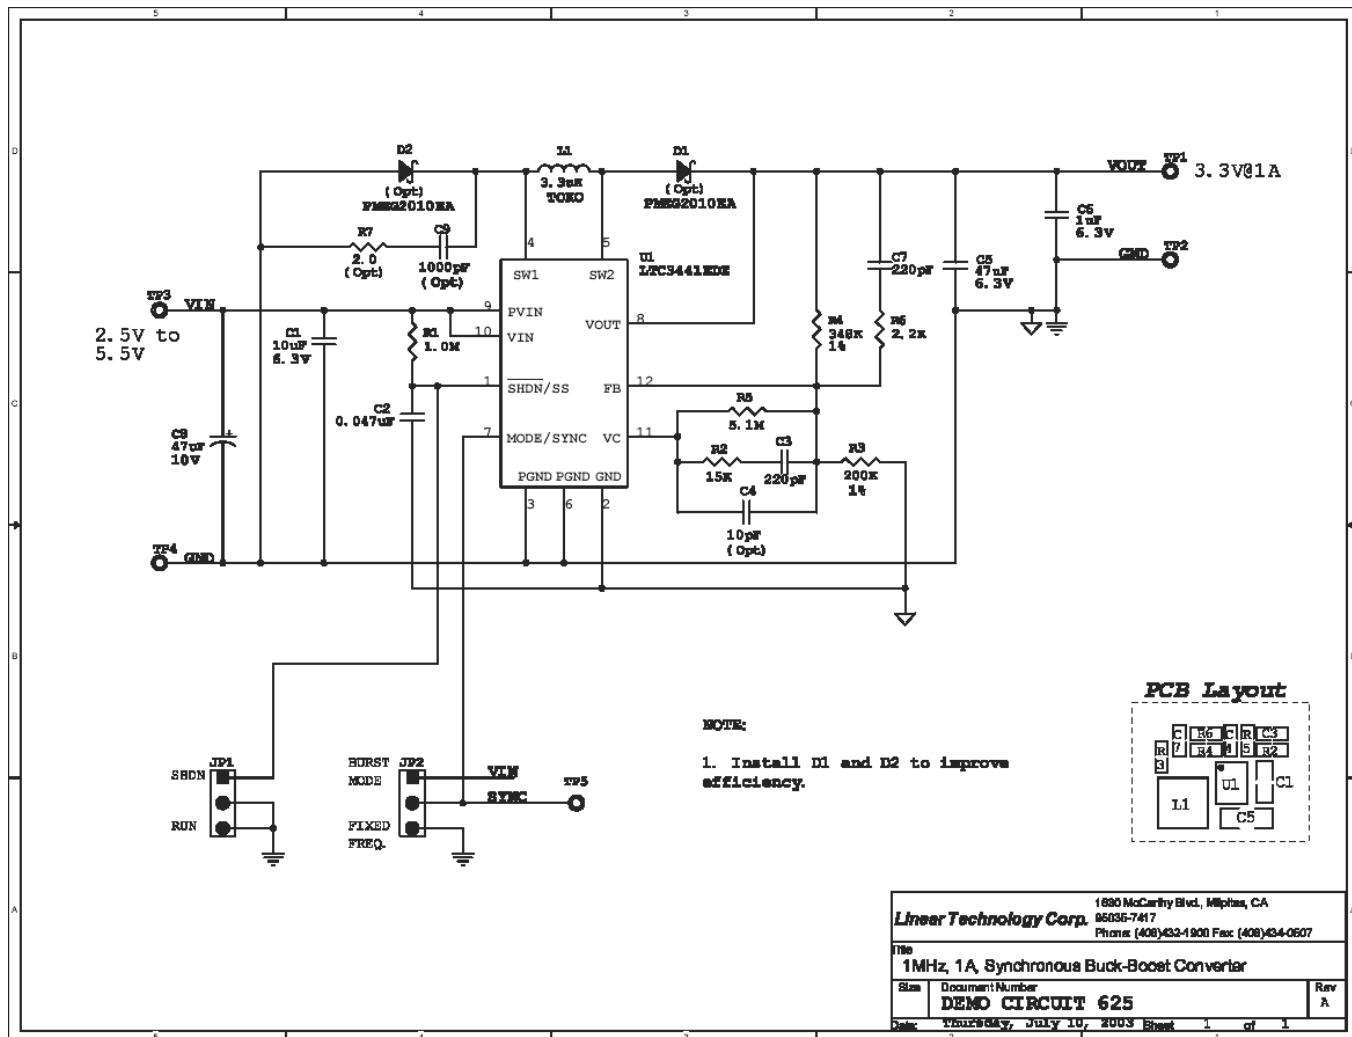


| | |
|--|--|
| 1620 McCarthy Blvd., Milpitas, CA 95036-7417 Phone (408)433-1900 Fax (408)434-0607 | |
| Title: 1MHz, 1A, Synchronous Buck-Boost Converter | |
| Size: | Document Number: DEMO CIRCUIT 625 |
| Date: | Rev: Thursday, July 10, 2003 Sheet 1 of 1 |

QUICK START GUIDE FOR DEMONSTRATION CIRCUIT 625


1MHZ, 1A SYNCHRONOUS BUCK-BOOST CONVERTER

| <i>Item</i> | <i>Qty</i> | <i>Reference</i> | <i>Part Description</i> | <i>Manufacture / Part #</i> |
|-------------|------------|---------------------|--------------------------------|--------------------------------|
| | | | | |
| | | | | |
| 1 | 1 | C1 | Cap., X5R 10 μ F 6.3V 20% | Taiyo Yuden JMK212BJ106MG-T |
| 2 | 1 | C2 | Cap., X5R 0.047 μ F 16V 5% | AVX 0402YD473JAT |
| 3 | 2 | C3,C7 | Cap., NPO 220pF 25V 10% | AVX 04023A221KAT2A |
| 4 | 0 | C4 (Opt) | Cap., NPO 10pF 25V 10% | AVX 04023A100KAT2A |
| 5 | 1 | C5 | Cap., X5R 47 μ F 6.3V 20% | Taiyo Yuden JMK325BJ476MM-T |
| 6 | 1 | C6 | Cap., X5R 1 μ F 6.3V 10% | Taiyo Yuden JMK107BJ105KA-T |
| 7 | 1 | C8 | Cap., Tant. 47 μ F 10V 20% | AVX TAJB476M010 |
| 8 | 0 | C9 (Opt) | Cap., X7R 1000pF 25V 20% | AVX 04023C102MAT2A |
| 9 | 2 | D2,D1 | Schottky Diode, 1A / 20V | PHILIPS PMEG2010EA |
| 10 | 2 | JP1,JP2 | Headers, 3 Pins 2mm Ctrs. | CommConn Con Inc. 2802S-03G2 |
| 11 | 2 | XJP1,XJP2 | Shunt, 2 Pins 2mm Ctrs. | CommConn Con Inc. CCIJ2MM-138G |
| 12 | 1 | L1 | Inductor, 3.3uH | TOKO A916CY-3R3M |
| 13 | 1 | R1 | Res., Chip 1.0M 1/16W 5% | AAC CR05-105JM |
| 14 | 1 | R2 | Res., Chip 15K 1/16W 5% | AAC CR05-153JM |
| 15 | 1 | R3 | Res., Chip 200K 0.06W 1% | AAC CR05-2003FM |
| 16 | 1 | R4 | Res., Chip 348K 1/16W 1% | AAC CR05-3483FM |
| 17 | 1 | R5 | Res., Chip 5.1M 1/16W 5% | AAC CR05-515JM |
| 18 | 1 | R6 | Res., Chip 2.2K 0.06W 5% | AAC CR05-222JM |
| 19 | 0 | R7 (Opt) | Res., Chip 2.0 0.06W 1% | AAC CR05-2R00FM |
| 20 | 5 | TP1,TP2,TP3,TP4,TP5 | Turret, Testpoint | MilI Max 2501-2 |
| 21 | 1 | U1 | I.C., Buck Converter | Linear Tech. Corp. LTC3441EDE |
| 22 | 4 | | SCREW, #4-40, 1/4" | ANY |
| 23 | 4 | | STANDOFF, #4-40 1/4" | MICRO PLASTICS 14HTSP101 |
| 24 | 1 | | PRINTED CIRCUIT BOARD | FAB., DEMO CIRCUIT 625A |
| 25 | 2 | | TOP STENCIL | STENCIL DC625A |

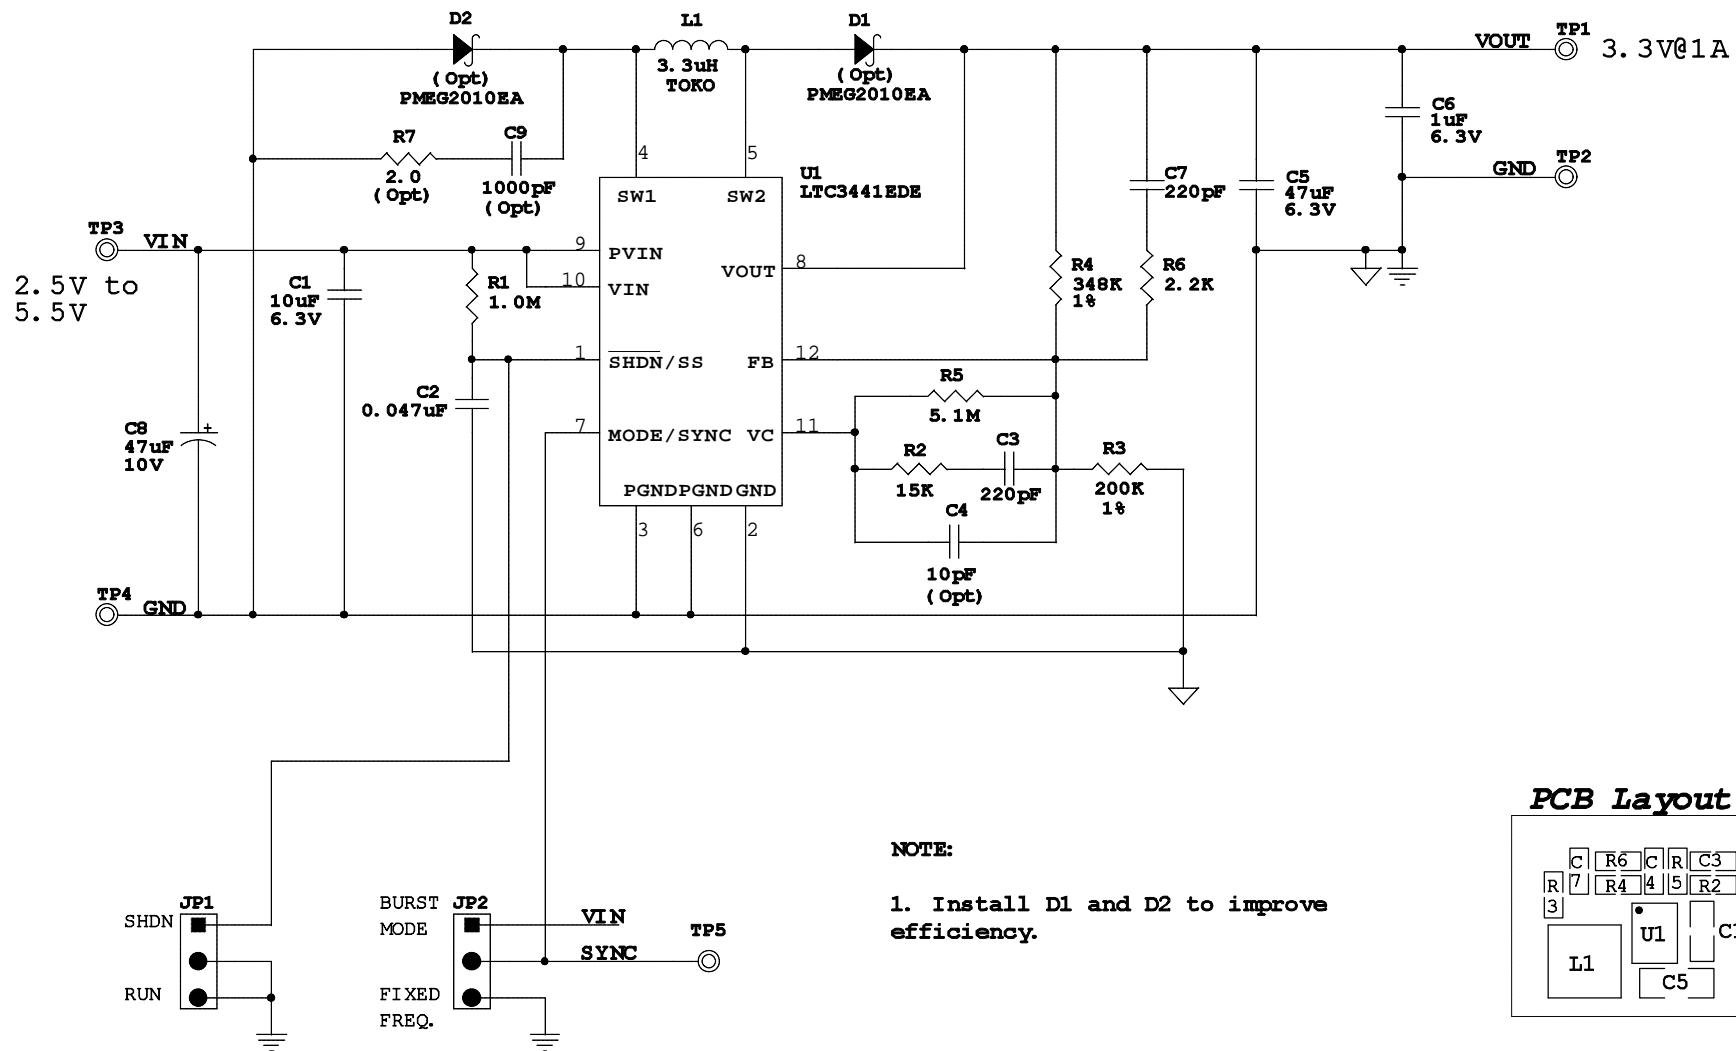

NOTE:

1. Install D1 and D2 to improve efficiency.



Monday, August 25, 2003

1630 McCarthy Blvd., Milpitas, CA
95035-7417
Phone: (408)432-1900 Fax (408)434-0507

Title
1MHz, 1A, Synchronous Buck-Boost Converter

| | | |
|-------------------------|-----------------|--------|
| Size | Document Number | Rev |
| DEMO CIRCUIT 625 | | A |
| Date | Sheet | 1 of 1 |

6/17/2005

| Item | Qty | Reference | Part Description | Manufacture / Part # |
|-------------|------------|---------------------|---------------------------|--------------------------------|
| | | | | |
| 1 | 1 | C1 | Cap., X5R 10uF 6.3V 20% | Taiyo Yuden JMK212BJ106MG-T |
| 2 | 1 | C2 | Cap., X5R 0.047uF 16V 5% | AVX 0402YD473JAT |
| 3 | 2 | C3,C7 | Cap., NPO 220pF 25V 10% | AVX 04023A221KAT2A |
| 4 | 0 | C4 (Opt) | Cap., NPO 10pF 25V 10% | AVX 04023A100KAT2A |
| 5 | 1 | C5 | Cap., X5R 47uF 6.3V 20% | Taiyo Yuden JMK325BJ476MM-T |
| 6 | 1 | C6 | Cap., X5R 1uF 6.3V 10% | Taiyo Yuden JMK107BJ105KA-T |
| 7 | 1 | C8 | Cap., Tant. 47uF 10V 20% | AVX TAJB476M010 |
| 8 | 0 | C9 (Opt) | Cap., X7R 1000pF 25V 20% | AVX 04023C102MAT2A |
| 9 | 2 | D2,D1 | Schottky Diode, 1A / 20V | PHILIPS PMEG2010EA |
| 10 | 2 | JP1,JP2 | Headers, 3 Pins 2mm Ctrs. | CommConn Con Inc. 2802S-03G2 |
| 11 | 2 | XJP1,XJP2 | Shunt, 2 Pins 2mm Ctrs. | CommConn Con Inc. CCIJ2MM-138G |
| 12 | 1 | L1 | Inductor, 3.3uH | TOKO A916CY-3R3M |
| 13 | 1 | R1 | Res., Chip 1.0M 1/16W 5% | AAC CR05-105JM |
| 14 | 1 | R2 | Res., Chip 15K 1/16W 5% | AAC CR05-153JM |
| 15 | 1 | R3 | Res., Chip 200K 0.06W 1% | AAC CR05-2003FM |
| 16 | 1 | R4 | Res., Chip 348K 1/16W 1% | AAC CR05-3483FM |
| 17 | 1 | R5 | Res., Chip 5.1M 1/16W 5% | AAC CR05-515JM |
| 18 | 1 | R6 | Res., Chip 2.2K 0.06W 5% | AAC CR05-222JM |
| 19 | 0 | R7 (Opt) | Res., Chip 2.0 0.06W 1% | AAC CR05-2R00FM |
| 20 | 5 | TP1,TP2,TP3,TP4,TP5 | Turret, Testpoint | Mill Max 2501-2 |
| 21 | 1 | U1 | I.C., Buck Converter | Linear Tech. Corp. LTC3441EDE |
| 22 | 4 | | SCREW, #4-40, 1/4" | ANY |
| 23 | 4 | | STANDOFF, #4-40 1/4" | MICRO PLASTICS 14HTSP101 |
| 24 | 1 | | PRINTED CIRCUIT BOARD | FAB., DEMO CIRCUIT 625A |
| 25 | 2 | | TOP STENCIL | STENCIL DC625A |



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помошь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помошь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.