

QUICK START GUIDE FOR DEMONSTRATION CIRCUIT 834

HIGH VOLTAGE LDO LINEAR REGULATOR

LT3014

DESCRIPTION

Demonstration circuit DC834 is a high voltage micro-power voltage regulator using the LT3014 low dropout linear regulator, which comes in a tiny SOT-23 package. The DC834 has an input voltage range from 3V to 80V, and an output voltage range between 1.22V and 60V. The DC834 is capable of delivering 20mA max. The DC supply current is typically only 6uA in operation, and

less than 1uA in shutdown. The DC834 is assembled with ceramic capacitors, to demonstrate the LT3014 maintaining stability with ceramic output capacitors. Due to its high input voltage range, the DC834 voltage regulator is ideally suited for automotive and industrial applications. **Gerber files for this circuit are available.** **Call the LTC Factory.**

QUICK START PROCEDURE

The DC834 is easy to set up to evaluate the performance of the LT3014. For proper measurement equipment configuration, set up the circuit according to the diagram in **Figure 1**.

Please follow the procedure outlined below for proper operation.

1. Before proceeding to test, insert a shunt into the OFF position of jumper JP4, and insert a shunt into jumper JP1, the 3.3V option.
2. Apply 5V across Vin and Gnd. Insert the jumper JP4 shunt into the ON position. Draw 1mA of load current. Measure Vout; it should be 3.3V +/- 5% (3.135V to 3.465V).
3. Vary the input voltage from 5V to 80V and the load current from no load to 20 mA. Vout should measure 3.3V +/-10% (2.97V to 3.63V).
4. Insert the jumper JP4 shunt into the OFF position and move the shunt in jumper JP1 into jumper JP2, the 5V output voltage option, and repeat the test. Re-insert jumper JP4 into the ON position. Just as in the 3.3 Vout test, the 5V output voltage should read Vout +/- 5% tolerance under static line and load conditions, and +/- 10% tolerance under dynamic line and load conditions.
5. When finished evaluating, insert jumper JP4 shunt into the OFF position.

Warning - if long leads are used to power the demo circuit, the input voltage at the part could “ring”. This ringing could affect the operation of the circuit or even exceed the maximum voltage rating of the IC. To eliminate this, insert a small aluminum electrolytic capacitor (for instance, a Sanyo cap., part # 100CV10BS) on the pads between the input power and return terminals on the bottom of the demo board. The (greater) ESR of the aluminum electrolytic capacitor will dampen the (possible) ringing voltage due to the use of long input leads. On a normal, typical PCB, with short traces, the capacitor is not needed.

QUICK START GUIDE FOR DEMONSTRATION CIRCUIT 834

HIGH VOLTAGE LDO LINEAR REGULATOR

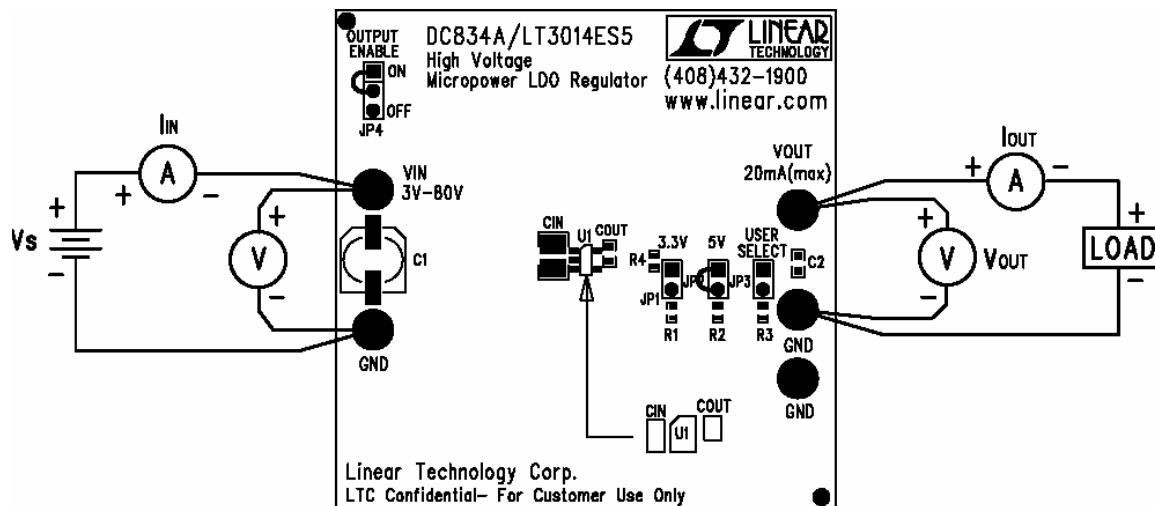


Figure 1. Proper Measurement Equipment Setup





Figure 2. Measuring Input or Output Voltage Ripple

QUICK START GUIDE FOR DEMONSTRATION CIRCUIT 834

HIGH VOLTAGE LDO LINEAR REGULATOR

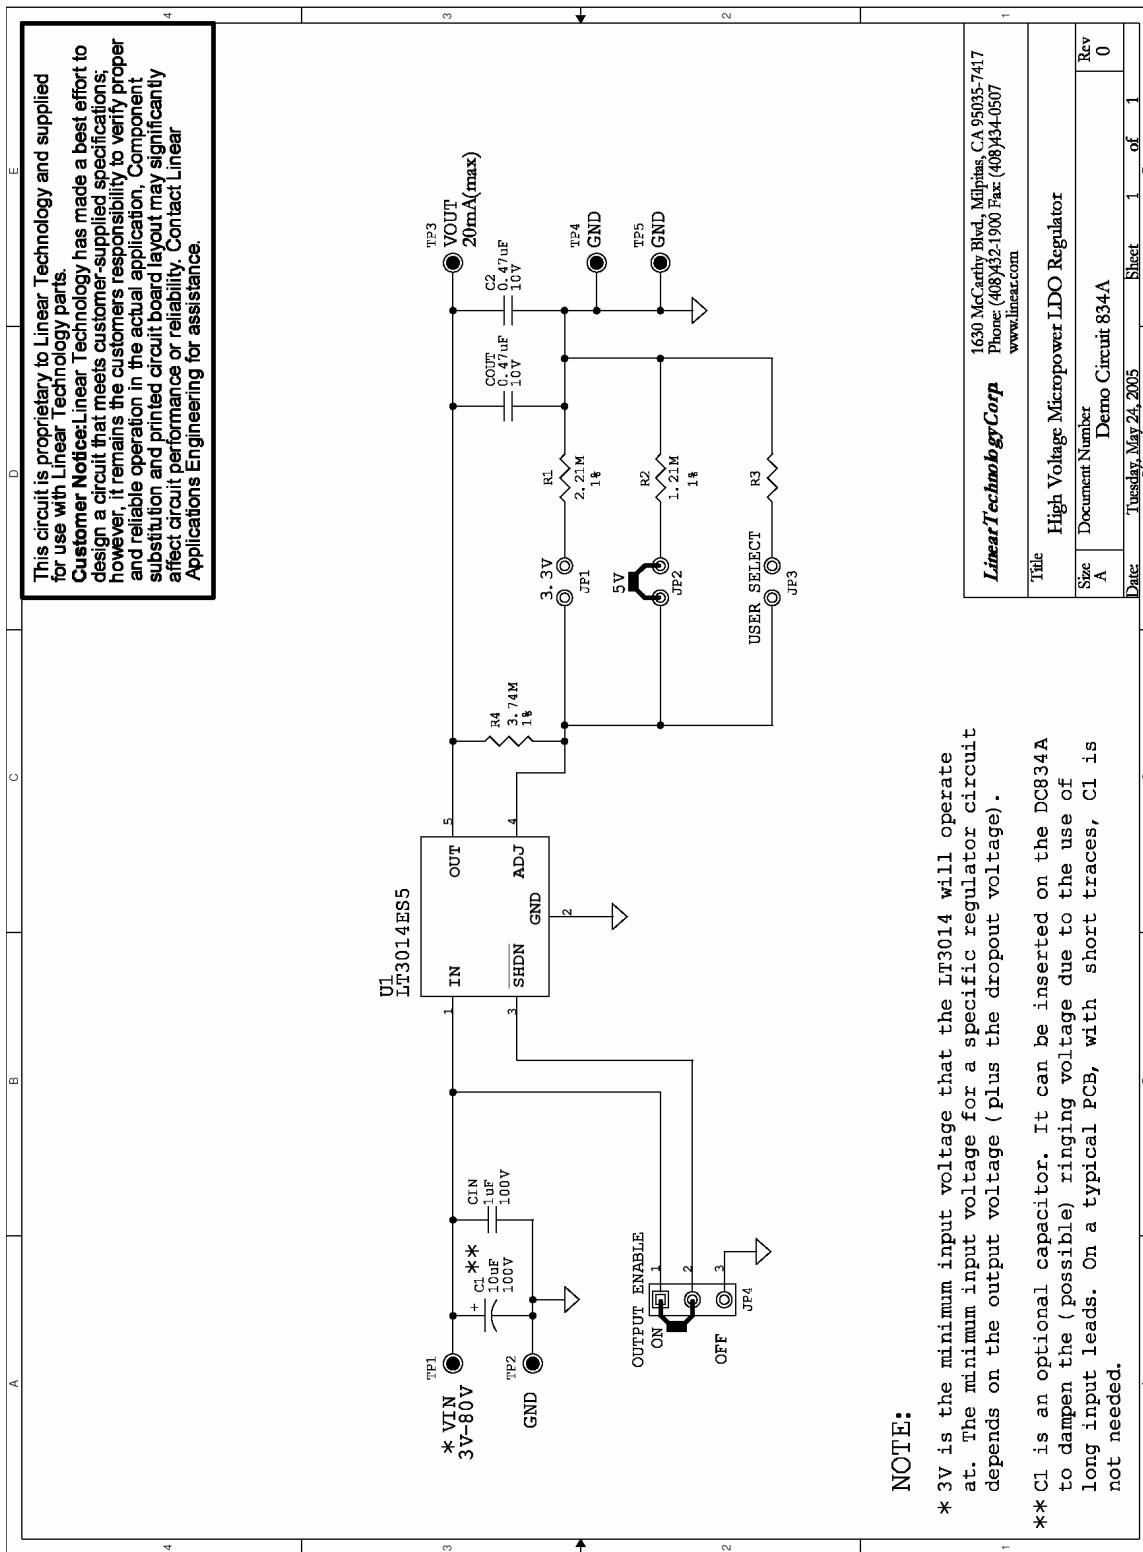

NOTE:

* 3V is the minimum input voltage that the LT3014 will operate at. The minimum input voltage for a specific regulator circuit depends on the output voltage (plus the dropout voltage).

** C1 is an optional capacitor. It can be inserted on the DC834A to dampen the (possible) ringing voltage due to the use of long input leads. On a typical PCB, with short traces, C1 is not needed.

Linear Technology Corp.	1630 McCarthy Blvd. Milpitas CA 95035-7417
Title	High Voltage Micropower LDO Regulator
Size	Document Number
A	Demo Circuit 834A
Date	Tuesday, May 24, 2005
	Sheet 1 of 1
	E
	Rev 0



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помошь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помошь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.