

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

| LOC | DIST | REVISIONS | | | | | |
|-----|------|-----------|-----|---------------------------|---------|-----|------|
| | | P | LTR | DESCRIPTION | DATE | DWN | APVD |
| - | - | H2 | | REVISED PER ECO-11-004587 | 11MAR11 | RK | HMR |

| LOC | DIST | DESCRIPTION | DATE | DWN | APVD | 180.7 | 188.2 | 18 | 1-1546306-8 | |
|------|-------------------|-------------|------|-----|------|-------|-------|------|-------------|-------------|
| - | - | - | - | - | - | 171.2 | 178.7 | 17 | 1-1546306-7 | |
| - | - | - | - | - | - | 161.7 | 169.2 | 16 | 1-1546306-6 | |
| △△△△ | - | - | - | - | - | 152.2 | 159.7 | 15 | 6-1546306-2 | |
| - | - | - | - | - | - | 152.2 | 159.7 | 15 | 1-1546306-5 | |
| - | - | - | - | - | - | 142.7 | 150.2 | 14 | 1-1546306-4 | |
| - | - | - | - | - | - | 133.2 | 140.7 | 13 | 1-1546306-3 | |
| △△ | - | - | - | - | - | 123.7 | 131.2 | 12 | 4-1546306-0 | |
| △△ | - | - | - | - | - | 123.7 | 131.2 | 12 | 3-1546306-3 | |
| - | - | - | - | - | - | 123.7 | 131.2 | 12 | 1-1546306-2 | |
| △ | - | - | 11 | - | - | 114.2 | 121.7 | 11 | 5-1546306-2 | |
| △△ | - | - | - | 2 | - | 114.2 | 121.7 | 11 | 3-1546306-4 | |
| △ | - | - | - | - | - | 114.2 | 121.7 | 11 | 3-1546306-1 | |
| - | - | - | - | - | - | 114.2 | 121.7 | 11 | 1-1546306-1 | |
| △ | - | - | - | - | - | 104.7 | 112.2 | 10 | 6-1546306-0 | |
| △△ | - | - | - | - | - | 104.7 | 112.2 | 10 | 5-1546306-8 | |
| - | - | - | - | - | - | 104.7 | 112.2 | 10 | 1-1546306-0 | |
| △△△ | 4 | 9 | - | - | - | 95.2 | 102.7 | 9 | 6-1546306-3 | |
| △△ | - | - | - | - | - | 95.2 | 102.7 | 9 | 5-1546306-6 | |
| - | - | - | - | - | - | 95.2 | 102.7 | 9 | 1546306-9 | |
| - | - | - | - | - | - | 85.7 | 93.2 | 8 | 5-1546306-9 | |
| △△ | - | - | - | - | - | 85.7 | 93.2 | 8 | 3-1546306-9 | |
| - | - | - | - | - | - | 85.7 | 93.2 | 8 | 1546306-8 | |
| △△ | - | - | - | - | - | 76.2 | 83.7 | 7 | 5-1546306-5 | |
| △ | - | - | 1 | - | 7 | 76.2 | 83.7 | 7 | 5-1546306-0 | |
| - | - | - | - | - | - | 76.2 | 83.7 | 7 | 4-1546306-5 | |
| △ | - | - | - | - | - | 76.2 | 83.7 | 7 | 3-1546306-7 | |
| - | - | - | - | - | - | 76.2 | 83.7 | 7 | 1546306-7 | |
| △△ | - | - | - | - | - | 66.7 | 74.2 | 6 | 5-1546306-4 | |
| △△ | - | - | - | - | 1 | 6 | 66.7 | 74.2 | 6 | 4-1546306-9 |
| - | - | - | - | 6 | - | - | 66.7 | 74.2 | 6 | 4-1546306-8 |
| - | - | - | - | - | - | - | 66.7 | 74.2 | 6 | 4-1546306-4 |
| △ | - | - | - | - | - | 6 | 66.7 | 74.2 | 6 | 3-1546306-6 |
| - | - | - | - | - | - | - | 66.7 | 74.2 | 6 | 1546306-6 |
| △ | - | - | - | - | - | 5 | 57.2 | 64.7 | 5 | 5-1546306-7 |
| △ | 5 | 5 | - | - | - | - | 57.2 | 64.7 | 5 | 5-1546306-3 |
| △△ | SCREW ON ONE SIDE | - | - | - | - | - | 57.2 | 64.7 | 5 | 4-1546306-7 |
| - | - | - | - | - | - | - | 57.2 | 64.7 | 5 | 4-1546306-3 |
| △ | - | - | - | - | - | 5 | 57.2 | 64.7 | 5 | 3-1546306-5 |
| - | - | - | - | - | - | - | 57.2 | 64.7 | 5 | 1546306-5 |
| - | - | - | - | - | - | - | 47.7 | 55.2 | 4 | 4-1546306-2 |
| △△ | - | - | - | - | - | - | 47.7 | 55.2 | 4 | 3-1546306-8 |
| - | - | - | - | - | - | - | 47.7 | 55.2 | 4 | 1546306-4 |
| - | 3 | 3 | - | - | - | - | 38.2 | 45.7 | 3 | 6-1546306-1 |
| - | - | - | - | - | - | - | 38.2 | 45.7 | 3 | 5-1546306-1 |
| - | - | - | - | - | - | - | 38.2 | 45.7 | 3 | 1546306-3 |
| △ | - | - | - | - | - | 2 | 28.7 | 36.2 | 2 | 4-1546306-6 |
| - | - | - | - | 2 | 2 | 2 | 28.7 | 36.2 | 2 | 4-1546306-1 |
| - | - | - | - | - | - | - | 28.7 | 36.2 | 2 | 1546306-2 |

| | | | | | | | | | | | | | | | | | |
|-------|-----------------------|-----------------------|----------------------|----------|----------------------------|----------------------------|-----------------------------|----------------------------|----------------------------|-----------------------------|------------------------|----------------------------|-----------------------------|-------|-------|-------------|----------|
| NOTES | ⑬ QC TAB .187 SS FLAT | ⑫ QC TAB .187 SS FLAT | ⑪ QC TAB .187 SS 90° | ⑩ JUMPER | ⑨ QC TAB DBL SIDE 90° .250 | ⑧ QC TAB DBL SIDE 45° .250 | ⑦ QC TAB DBL SIDE FLAT .250 | ⑥ QC TAB DBL SIDE 90° .187 | ⑤ QC TAB DBL SIDE 45° .187 | ④ QC TAB DBL SIDE FLAT .187 | ③ QC TAB SGL SIDE .250 | ② QC TAB SGL SIDE 45° .250 | ① QC TAB SGL SIDE FLAT .250 | DIM B | DIM A | NO. OF POS. | PART NO. |
|-------|-----------------------|-----------------------|----------------------|----------|----------------------------|----------------------------|-----------------------------|----------------------------|----------------------------|-----------------------------|------------------------|----------------------------|-----------------------------|-------|-------|-------------|----------|

THIS DRAWING IS A CONTROLLED DOCUMENT.

| | | | |
|----------------|--|--------------------------|--|
| DIMENSIONS: MM | TOLERANCES UNLESS OTHERWISE SPECIFIED: | DWN S SCHLEGEL 20AUG2002 | TE Connectivity |
| | 0 PLC ± - | CHK C RICHARD 8/20/02 | |
| MATERIAL | 1 PLC ± 0.3 | APVD C RICHARD 8/20/02 | |
| | 2 PLC ± 0.25 | PRODUCT SPEC | NAME 9.50MM (.374) DBL ROW BARRIER STRIP W/O WASHER |
| | 3 PLC ± - | APPLICATION SPEC | SIZE A2 CAGE CODE 00779 DRAWING NO C=1546306 RESTRICTED TO |
| | 4 PLC ± - | WEIGHT | SCALE NTS SHEET 1 OF 3 REV H2 |
| | ANGLES ± 2' | CUSTOMER DRAWING | |

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

| LOC | | DIST | | REVISIONS | | | |
|-----|-----|-------------|------|-----------|------|--|--|
| P | LTR | DESCRIPTION | DATE | DWN | APVD | | |
| - | - | SEE SHEET 1 | - | - | - | | |

PHYSICAL PROPERTIES:
 HOUSING MATERIAL: THERMOPLASTIC, PC
 FLAMMABILITY: UL94V-0 COLOR: BLACK
 MAX BOW/WARP: .0056 IN/IN.

TERMINAL:
 TERMINALS: BRASS, TIN PLATED
 SCREWS: 6-32, STEEL, NICKEL PLATED

MECHANICAL:
 PITCH (TERMINAL SPACING): 9.50mm(.374")
 WIRE RANGE: 12-22 AWG
 RECOMMENDED TIGHTENING TORQUE: 12IN-LBS MAX.

ELECTRICAL PROPERTIES:
 MAXIMUM CURRENT: 20A
 OPERATING VOLTAGE: 300V

ENVIRONMENTAL PROPERTIES:
 OPERATING TEMP RANGE: -40°C TO +120°C.


- 1 SEE FIGURE.
- 2 MARKED WITH WHITE INK.
- 3 PRELIMINARY PART NUMBER.
- 4 SCREWS AND TERMINALS ARE NICKEL PLATED BRASS.
- 5 STAINLESS STEEL SCREWS.
- 6 SCREWS ARE NICKEL PLATED BRASS.
- 7 WIRE CLAMP SCREWS TO BE USED ONLY ON SIDE OPPOSITE QC TABS.
- 8 TE CONNECTIVITY LOGO LOCATED APPROXIMATE AREA SHOWN.

-- SELECT LOAD CHART --

| | | | | | | | | | | | | | | | | | | | | | | | | | |
|------------------|---------------------|---------|--------------------|----|--------|-----|--------------------------|---|--------------------------|---|---------------------------|----|--------------------------|---|--------------------------|---|---------------------------|---|--------------------------|---|--------------------------|---|---------------------------|-------------|-------------|
| - | - | 4-5,5-6 | - | - | - | - | ALL | - | - | - | - | 11 | 3-1546306-4 | | | | | | | | | | | | |
| - | - | - | - | - | - | ALL | 1-3 | - | - | - | - | 10 | 6-1546306-0 | | | | | | | | | | | | |
| - | - | 1,2 | - | - | ALL | - | - | - | - | - | - | 7 | 5-1546306-0 | | | | | | | | | | | | |
| - | - | - | - | 1 | ALL | - | - | - | - | - | - | 6 | 4-1546306-9 | | | | | | | | | | | | |
| 12 | QC TAB .187 SS FLAT | 11 | QC TAB .187 SS 90° | 10 | JUMPER | 9 | QC TAB DBL SIDE 90° .250 | 8 | QC TAB DBL SIDE 45° .250 | 7 | QC TAB DBL SIDE FLAT .250 | 6 | QC TAB DBL SIDE 90° .187 | 5 | QC TAB DBL SIDE 45° .187 | 4 | QC TAB DBL SIDE FLAT .187 | 3 | QC TAB SGL SIDE 90° .250 | 2 | QC TAB SGL SIDE 45° .250 | 1 | QC TAB SGL SIDE FLAT .250 | NO. OF POS. | PART NUMBER |
| POSITIONS LOADED | | | | | | | | | | | | | | | | | | | | | | | | | |


| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|---------------------|---------------------|--------------------|---------------------|--------|--------------------|--------------------------|--------|--------------------------|--------------------------|---------------------------|--------------------------|--------------------------|---------------------------|--------------------------|--------------------------|---------------------------|--------------------------|--------------------------|---------------------------|--------------------------|--------------------------|---------------------------|--------------------------|-------|---------------------------|----------|-------------|-------------|----------|-------------|-------------|-------|-------------|-------------|
| - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | 294.7 | 302.2 | 30 | 3-1546306-0 | | | | | | | |
| - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | 285.2 | 292.7 | 29 | 2-1546306-9 | | | |
| - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | 275.7 | 283.2 | 28 | 2-1546306-8 | |
| - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | 266.2 | 273.7 | 27 | 2-1546306-7 |
| - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | 256.7 | 264.2 | 26 | 2-1546306-6 |
| - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | 247.2 | 254.7 | 25 | 2-1546306-5 |
| - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | 237.7 | 245.2 | 24 | 2-1546306-4 |
| - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | 228.2 | 235.7 | 23 | 2-1546306-3 |
| - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | 218.7 | 226.2 | 22 | 2-1546306-2 |
| - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | 209.2 | 216.7 | 21 | 2-1546306-1 |
| 1 | QC TAB .187 SS FLAT | 1 | QC TAB .187 SS 90° | 1 | JUMPER | 1 | QC TAB DBL SIDE 90° .250 | 1 | QC TAB DBL SIDE 45° .250 | 1 | QC TAB DBL SIDE FLAT .250 | 1 | QC TAB DBL SIDE 90° .187 | 1 | QC TAB DBL SIDE 45° .187 | 1 | QC TAB DBL SIDE FLAT .187 | 1 | QC TAB SGL SIDE 90° .250 | 1 | QC TAB SGL SIDE 45° .250 | 1 | QC TAB SGL SIDE FLAT .250 | DIM B | DIM A | NO. OF POS. | PART NO. | 199.7 | 207.2 | 20 | 3-1546306-2 | | | | |
| - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | 199.7 | 207.2 | 20 | 2-1546306-0 |
| - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | 190.2 | 197.7 | 19 | 1-1546306-9 |
| NOTES | 13 | QC TAB .187 SS FLAT | 12 | QC TAB .187 SS FLAT | 11 | QC TAB .187 SS 90° | 10 | JUMPER | 9 | QC TAB DBL SIDE 90° .250 | 8 | QC TAB DBL SIDE 45° .250 | 7 | QC TAB DBL SIDE FLAT .250 | 6 | QC TAB DBL SIDE 90° .187 | 5 | QC TAB DBL SIDE 45° .187 | 4 | QC TAB DBL SIDE FLAT .187 | 3 | QC TAB SGL SIDE 90° .250 | 2 | QC TAB SGL SIDE 45° .250 | 1 | QC TAB SGL SIDE FLAT .250 | DIM B | DIM A | NO. OF POS. | PART NO. | | | | | |

1 2 SPL MARKING


| | | | | |
|---|--|--------------------------------|---|--------------------|
| THIS DRAWING IS A CONTROLLED DOCUMENT. | | DWN S SCHLEGEL 20AUG2002 |  TE Connectivity | |
| DIMENSIONS: MM | | CHK C RICHARD 8/20/02 | | |
| TOLERANCES UNLESS OTHERWISE SPECIFIED: | | APVD C RICHARD 8/20/02 | NAME 9.50MM (.374) DBL ROW BARRIER STRIP W/O WASHER | |
| 0 PLC ± - 1 PLC ± 0.3 2 PLC ± 0.25 3 PLC ± - 4 PLC ± - ANGLES ± 2° | | PRODUCT SPEC - | RESTRICTED TO - | |
| MATERIAL | | APPLICATION SPEC - | SIZE A2 | CAGE CODE 00779 |
| FINISH | | WEIGHT - | DRAWING NO C=1546306 | |
| | | CUSTOMER DRAWING | | SCALE NTS |
| | | SHEET 2 of 3 | | REV H2 |

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.


| LOC | | DIST | | REVISIONS | | | |
|-----|-----|-------------|------|-----------|------|---|---|
| P | LTR | DESCRIPTION | DATE | DWN | APVD | | |
| - | - | SEE SHEET 1 | - | - | - | - | - |

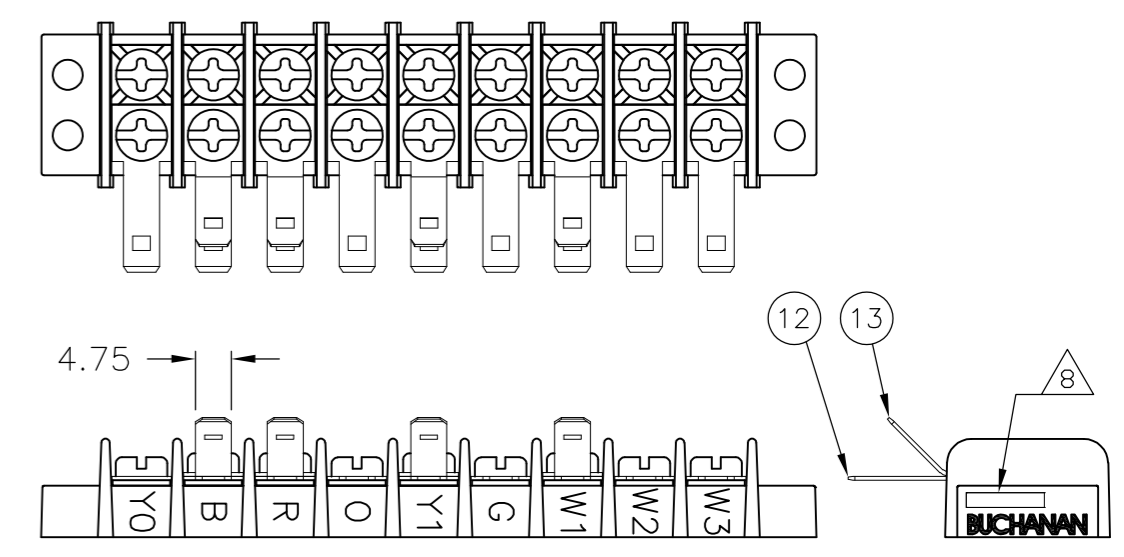


6-1546306-3

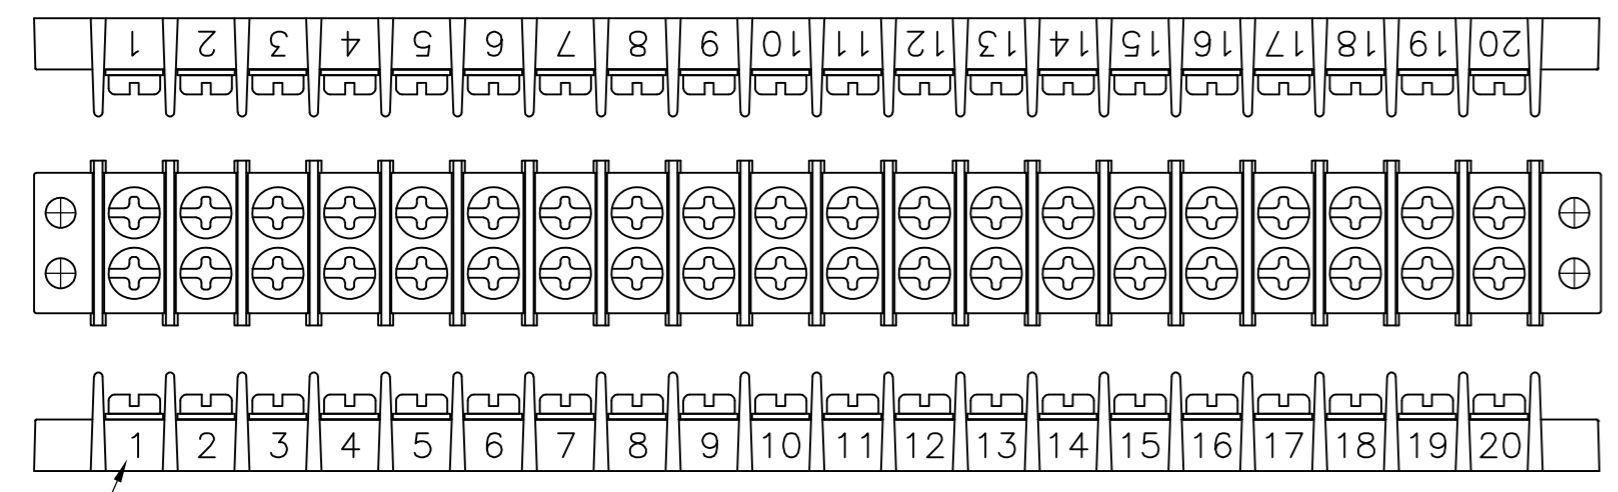


3-1546306-2

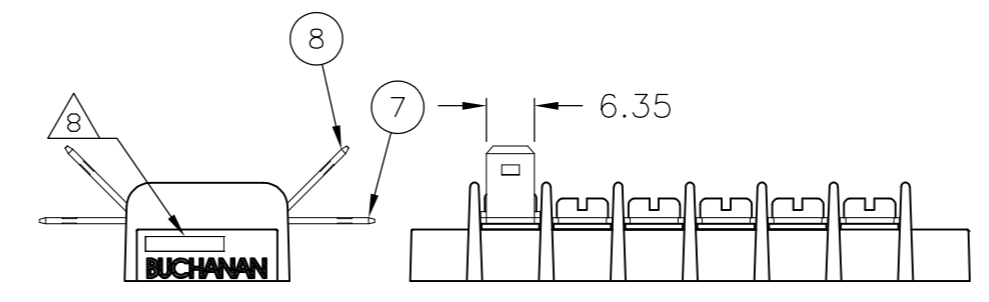


4-1546306-9

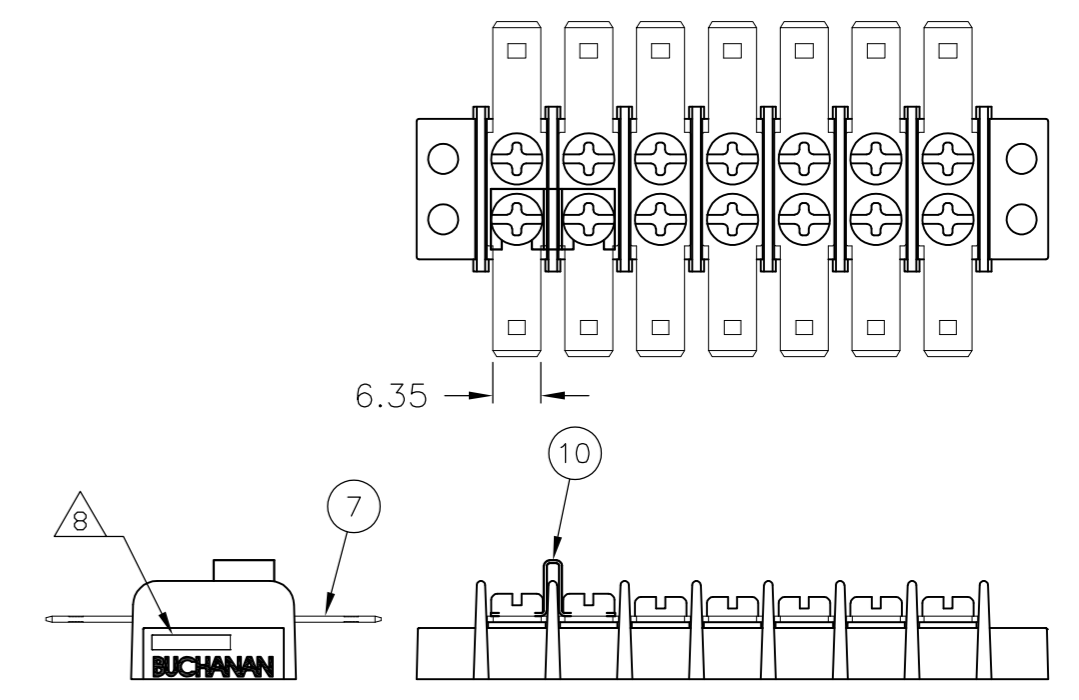



5-1546306-0

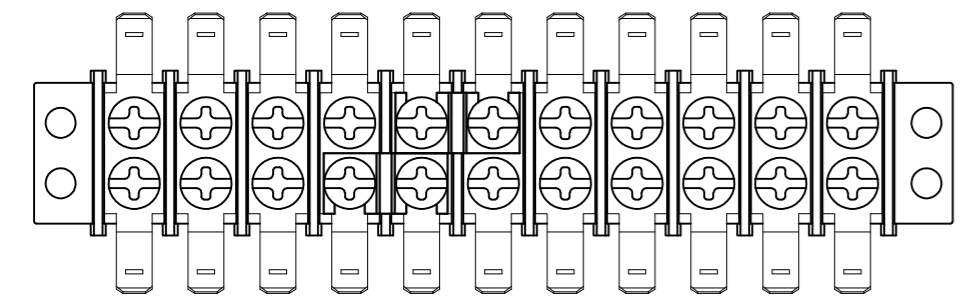


3-1546306-4

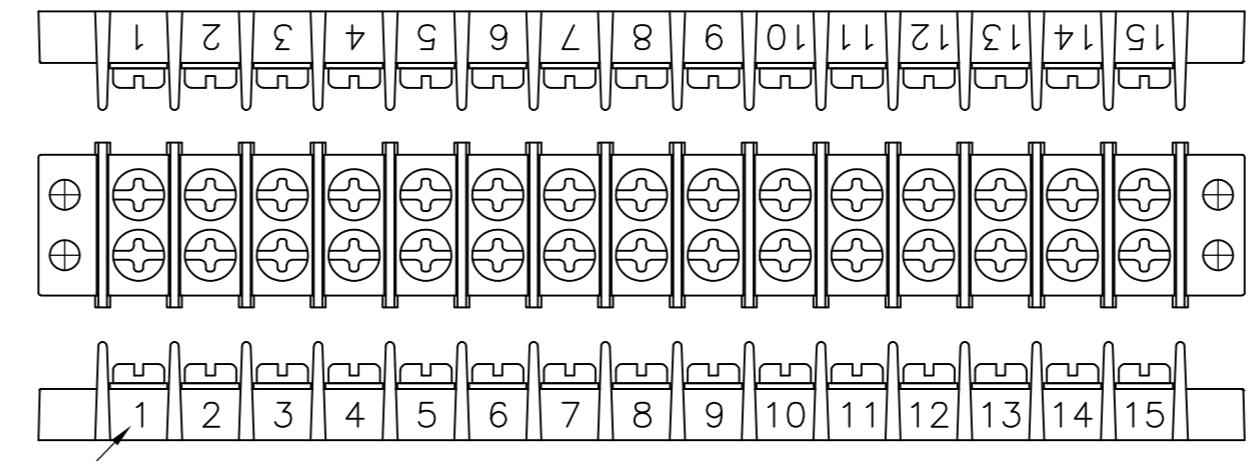

6-1546306-2

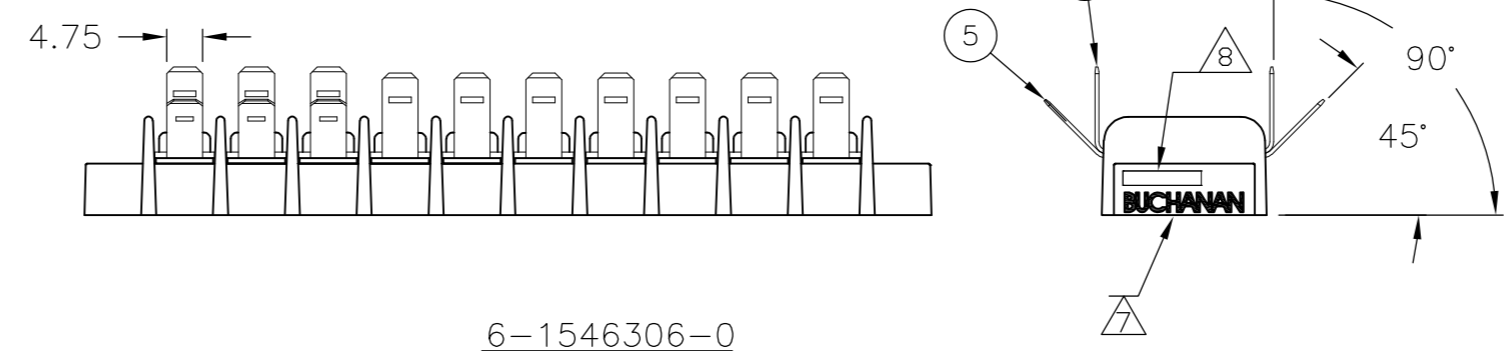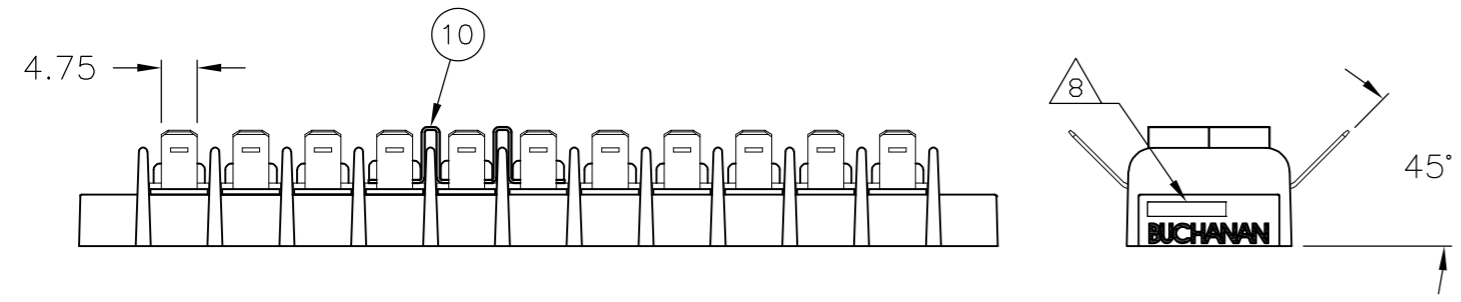

6-1546306-0

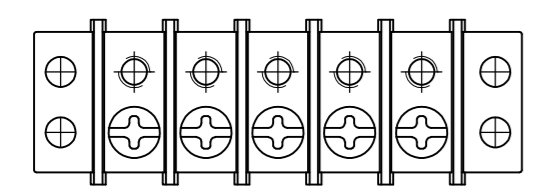

4-1546306-7

| | | | | |
|--|--|--------------------------------|--|--|
| THIS DRAWING IS A CONTROLLED DOCUMENT. | | DWN S SCHLEGEL 20AUG2002 | TE Connectivity | |
| DIMENSIONS: MM | | CHK C RICHARD 8/20/02 | | |
| TOLERANCES UNLESS OTHERWISE SPECIFIED: | | APVD C RICHARD 8/20/02 | NAME 9.50MM (.374) DBL ROW BARRIER STRIP W/O WASHER | |
| 0 PLC ± - | | PRODUCT SPEC | SIZE A2 | |
| 1 PLC ± 0.3 | | APPLICATION SPEC | CAGE CODE 00779 | |
| 2 PLC ± 0.25 | | WEIGHT | DRAWING NO C=1546306 | |
| 3 PLC ± - | | FINISH | RESTRICTED TO | |
| 4 PLC ± - | | MATERIAL | SCALE NTS | |
| ANGLES ± 2° | | CUSTOMER DRAWING | SHEET 3 OF 3 | |
| FINISH | | | REV H2 | |



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.