


1

2

3

4

FCI PART NO.	POWER TYPE	LENGTH "X"
10084088-Z0050YYLF	12V	500+25/-0
10084088-Z0100YYLF	12V	1000±15
10084088-Z0300YYLF	12V	3000±25
10084088-Z0500YYLF	12V	5000±25

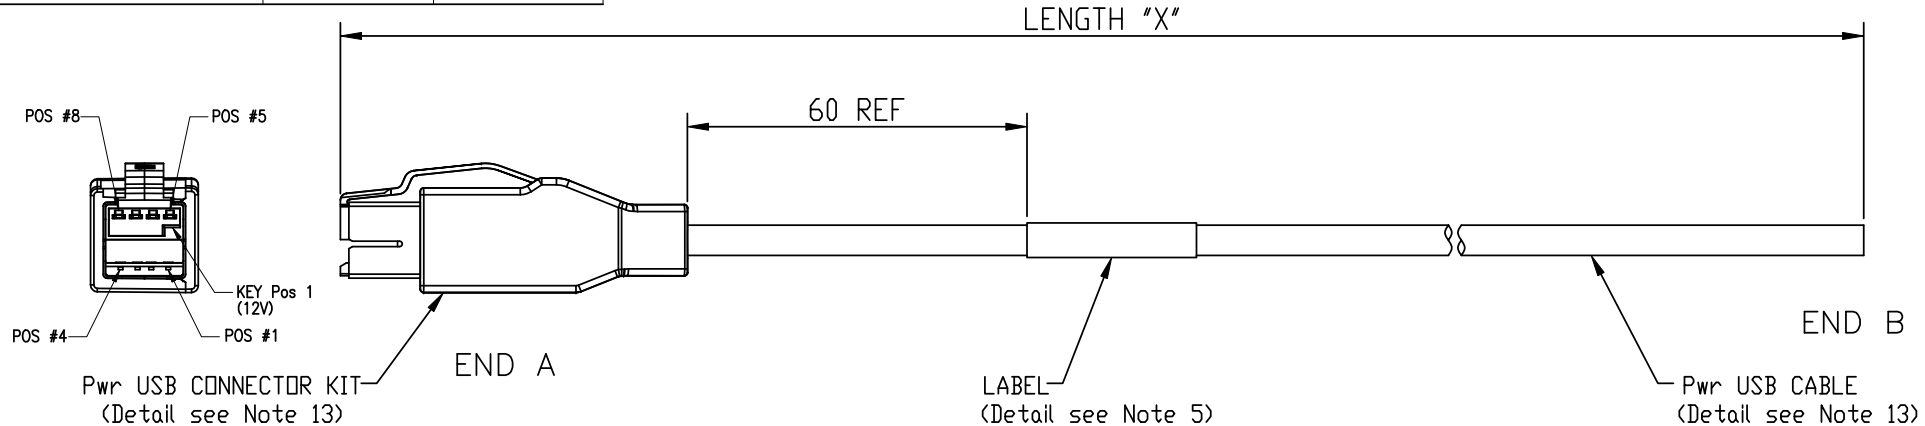

PIN ASSIGNMENT

END A	SIGNAL NAME	WIRE COLOR	WIRE AWG	END B
1	VBUS (+5V)	RED	20	-
2	DATA -	WHITE	28	-
3	DATA +	GREEN	28	-
4	GND	BLACK	20	-
5	12V GND	BLUE	20	-
6	+12V	BROWN	20	-
7	+12V	ORANGE	20	-
8	12V GND	YELLOW	20	-
SHELL	FRAME GND	-	SHIELD	-

Mark with
10075076001
REV. proj_revision
in area indicated
by X....

rev	ecn no	dr	date
A	N08-0120	ST	6/18/2008

TOLERANCES UNLESS OTHERWISE SPECIFIED			
LINEAR			-
			-
			-
ANGULAR	0°	±2°	-
			-

Material				Spec ref		spec_ref			
Mat code				surface		tolerance		projection	MM
Heattreat				ISO 1302		ISO 406 ISO 1101			
Plating/Finish									
Dr	Sunny Tsai	10/11/2007				size		Scale	
Eng	Sunny Tsai	10/11/2007	Product family			CABLE ASS'Y		A3	-
Chr	Jackson Wang	10/11/2007	Model Name			ECN			
Appr	Jackson Wang	10/11/2007	Model Revision			REL Level			
		title				dwg no		Rev.	
		SINGLE END POWER USB 12V CABLE ASSEMBLY - BLACK				10084088		A	
Pro/E file		catalog no				CUSTOMER DWG		sheet 1 of 3	

REV F - 2006-04-17

2

3PDM: Rev:A

STATUSReleased

Printed: Jul 10, 2009

FCI CONFIDENTIAL

FCI

This document is the property of and embodies CONFIDENTIAL and PROPRIETARY information of FCI. No part of the information shown on this document may be used in any way or disclosed to others without the written consent of FCI. Copyright FCI.

FCI PART NO.


SEE SHEET 1

NOTES:

1. MATES WITH FCI PART NUMBER: 55917/57496.
2. UNLESS OTHERWISE SPECIFIED ASSEMBLED LENGTH TOLERANCE=
=< 1 METER= ±15.0mm
> 1 METER TO 10 METER= ±2% OF L1 OR L2
> 10 METER= +0%/-4% OF L1 OR L2

3. PART NUMBER SCHEME FOR CABLE ASSEMBLY:

10084088 - Z X X X X Y Y LF

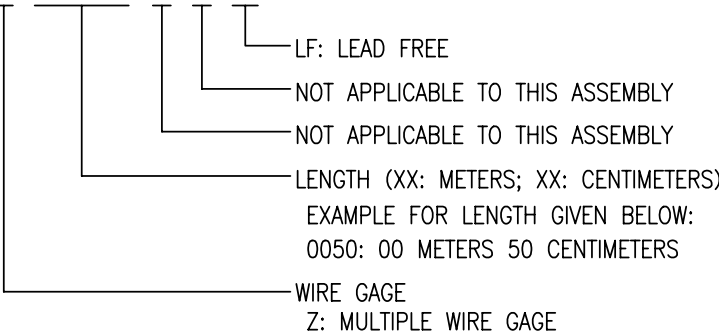

4. UNLESS OTHERWISE SPECIFIED LABEL POSITION SHALL BE APPROXIMATELY 60mm FROM REAR OF CONNECTOR.
5. UNLESS OTHERWISE SPECIFIED STANDARD LABEL SHALL BE BRADY LABEL P/N THT-10-427-30.

LABEL DETAILS:

FCI	----	MANUFACTURER CODE OR NAME
10084088-ZXXXXYYLF	----	FCI P/N
REV.A	----	REVISION
WWYY	----	DATE CODE WWYY FORMAT
MADE IN CHINA	----	COUNTRY ORIGIN

6. ALL CABLE ASSEMBLIES SHALL BE TESTED 100% FOR CONTINUITY AS DEFINED IN WIRING LIST.

7. UNLESS OTHERWISE SPECIFIED ALL CABLE ASSEMBLIES SHALL BE 100% HI-POT TESTED BY APPLYING 300V DC FOR MINIMUM OF 10ms, UNLESS ACTIVE COMPONENTS ARE USED IN THIS ASSEMBLY.
8. OTHER TESTING PERFORMED AS REQUIRED:
DIELECTRIC RESISTANCE: 50M Ohms MIN.
CONNECTION RESISTANCE: 0.8 Ohms MAX. (-Z0050YYLF, 0.5MR LENGTH)
1.0 Ohms MAX. (-Z0100YYLF, 1.0MR LENGTH)
1.2 Ohms MAX. (-Z0300YYLF, 3.0MR LENGTH)
1.8 Ohms MAX. (-Z0500YYLF, 5.0MR LENGTH)
9. THIS DIMENSION IS A FINISHED PRODUCT LENGTH.
10. LEAD FREE PRODUCTS MEET EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.
11. CONNECTOR ASSEMBLIES SHOWN ARE FOR REFERENCE ONLY AND MAY NOT SHOWN ALL PART DETAIL, REFERENCE CONNECTOR ASSEMBLY DRAWINGS FOR COMPLETE DETAILS.
12. PACKAGE: EACH CABLE ASSEMBLY IN CLDEAR ZIP-LOCK BPLY BAG, THEN BULK PACKED IN A BOX.

Mark with
10075076001
REV. prai_revision
in area indicated
by X....

rev	ecn no	dr	date
-	See sheet 1	-	-
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-

TOLERANCES UNLESS OTHERWISE SPECIFIED			
LINEAR			
ANGULAR	0°	±2°	

Material				Spec ref	spec_ref		
Mat code				surface ISO 1302	tolerance ISO 406 ISO 1101	projection 	MM 
Heattreat							
Plating/Finish							
Dr	Sunny Tsai	10/11/2007				size	Scale
Eng	Sunny Tsai	10/11/2007	Product family CABLE ASS'Y			A3	-
Chr	Jackson Wang	10/11/2007	Model Name			ECN	
Appr	Jackson Wang	10/11/2007	Model Revision			REL Level	
		title SINGLE END POWER USB 12V CABLE ASSEMBLY - BLACK			dwg no 10084088		Rev. A
Pro/E file		catalog no			CUSTOMER DWG		sheet 2 of 3

FCI PART NO. SEE SHEET 1

NOTES:

13. COMPONENT DETAIL

A) Pwr USB CONNECTOR KIT:

MATERIALS	SPECIFICATIONS
SHELLS	HIGH STRENGTH COPPER ALLOY
HOUSINGS	THERMOPLASTIC UL94V-0 RATED, COLOR: TEAL
TERMINALS	HIGH STRENGTH COPPER ALLOY
COVERS	THERMOPLASTIC UL94V-0 RATED PEBBLE GRAY
PLATING	
SHELL	UNDERPLATE; 40 MICROINCHES NI 100 MICROINCHES MIN BRIGHT TIN
TERMINALS	UNDERPLATE; 40 MICROINCHES NI CONTACT AREA; 30 MICROINCHES GXT TAIL AREA; 100 MICROINCHES MATTED TIN
ELECTRICAL	
VOLTAGE RATING	USB;5.25VDC,+POWER;12VDC
DIELECTRIC WITHSTANDING VOLTAGE	750 VAC
INSUL. RESISTANCE	1000 MEG OHMS AT 500 VDC
CURRENT RATING(NOTE 1)	1.50A USB SECTION 3.00A POWER SECTION

B) Pwr USB CABLE:

SPEC: 28AWG*1P+20AWG*6C+AL/MYLAR+DRAIN+BRAID

1) UL TYPE: CM
CSA TYPE: CMG

2) CONSTRUCTION:

ITEM		SPECIFICATIONS	
CONDUCTOR	AWG	28AWG	20AWG
	MATERIAL	TINNED COPPER	TINNED COPPER
	COND.SIZE	7/0.127mm	19/0.20mm
INSULATION	MATERIAL	HD-PE	SR-PVC
	OD	0.80±0.05mm	1.5±0.05mm
	NO.	1PAIR	6C
AL/MYLAR	COVERAGE	100%	
	OVERLAP	25% Min.	
DRAIN	AWG	28AWG	
	MATERIAL	TINNED COPPER	
	COND.SIZE	7/0.127mm	
BRAID	MATERIAL	TINNED COPPER	
	SIZE	16/7/0.10mm	
JACKET	MATERIAL	PVC	
	OD	6.50±0.25mm	
	COLOR	BLACK (OTHER COLORS AVAILABLE ON REQUEST)	
ELECTRICAL CHARACTERISTICS			
RATING		RATING: TEMP 80℃ VOLTAGE 30V	
Conductor Resistance at 20℃ (MAX)		28AWG < 237.25 Ωm/KM	
		20AWG < 34.6 Ωm/KM	
IMPEDANCE (Differential)		90 Ωm±15%; at TDR	
DELAY		< 26ns/Cable; at TDR	
SKEW		100ps MAX.	
ATTENUATION		Refer to USB 2.0 Specification	

Mark with
10075076001
REV. proj_revision
in area indicated
by X....

rev	ecn no	dr	date
-	See Sheet 1	-	-
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-

TOLERANCES UNLESS OTHERWISE SPECIFIED

LINEAR			-	-	-	-
			-	-	-	-
			-	-	-	-
ANGULAR	0°	±2°	-	-	-	-

Material				Spec ref		spec_ref	
Mat code				surface ISO 1302	tolerance ISO 406 ISO 1101	projection 	MM 
Heattreat							
Plating/Finish							
Dr	Sunny Tsai	10/11/2007				size A3	Scale -
Eng	Sunny Tsai	10/11/2007	Product family		CABLE ASS'Y		
Chr	Jackson Wang	10/11/2007	Model Name			ECN	
Appr	Jackson Wang	10/11/2007	Model Revision			REL Level	
		title			dwg no		Rev.
		SINGLE END POWER USB 12V CABLE ASSEMBLY - BLACK			10084088		A
Pro/E file		catalog no			CUSTOMER DWG		sheet 3 of 3



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.