


HLCP-J100, HDSP-4820, HDSP-4830 & HDSP-4832

10-Element Bar Graph Array



Data Sheet



Description

These 10-element LED arrays are designed to display information in easily recognizable bar graph form. The packages are end stackable and therefore capable of displaying long strings of information. Use of these bar graph arrays eliminates the alignment, intensity, and color matching problems associated with discrete LEDs. The HDSP-4820/4830/4840/4850 and HLCPJ100 each contain LEDs of one color. The HDSP-4832/4836 are multicolor arrays with High Efficiency Red, Yellow, and High Performance Green LEDs in a single package.


Applications

- Industrial Controls
- Instrumentation
- Office Equipment
- Computer Peripherals
- Consumer Products

Features

- Custom Multicolor Array Capability
- Matched LEDs for Uniform Appearance
- End Stackable
- Package Interlock Ensures Correct Alignment
- Low Profile Package
- Rugged Construction
- Large, Easily Recognizable Segments
- High ON-OFF Contrast, Segment to Segment
- Wide Viewing Angle
- Categorized for Luminous Intensity
- HDSP-4832/4836/4840/4850 Categorized for Dominant Wavelength
- HLCP-J100 Operates at Low Current
Typical Intensity of 1.0 mcd at 1 mA Drive Current

Package Dimensions

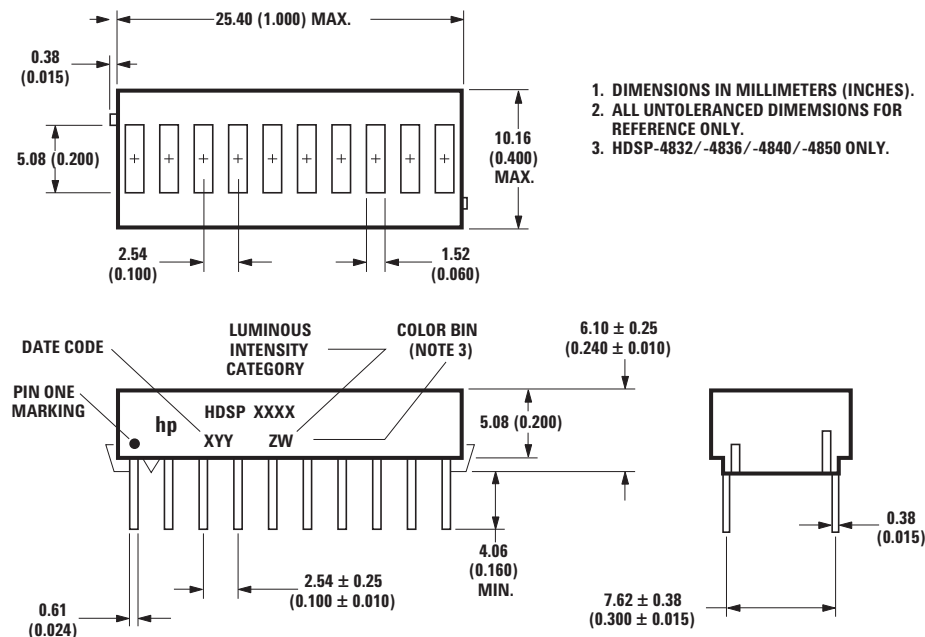


Absolute Maximum Ratings [1]

| Parameter | Red HDSP-4820 | AlGaAs Red HLCP-J100 | HER HDSP-4830 | Yellow HDSP-4840 | Green HDSP-4850 |
|--|------------------------------------|-------------------------|----------------------|----------------------|----------------------|
| Average Power Dissipation per LED ($T_A = 25^\circ\text{C}$) | 63 mW | 37 mW | 87 mW | 50 mW | 105 mW |
| Peak Forward Current per LED | 150 mA ^[2] | 45 mA ^[3] | 90 mA ^[4] | 60 mA ^[4] | 90 mA ^[4] |
| DC Forward Current per LED | 30 mA ^[5] | 15 mA ^[5] | 30 mA ^[6] | 20 mA ^[6] | 30 mA ^[6] |
| Operating Temperature Range | -40°C to +85°C | -20°C to +100°C | -40°C to +85°C | -40°C to +85°C | -20°C to +85°C |
| Storage Temperature Range | -40°C to +85°C | -55°C to +100°C | -40°C to +85°C | -40°C to +85°C | -40°C to +85°C |
| Reverse Voltage per LED | 3.0 V | 5.0 V | 3.0 V | 3.0 V | 3.0 V |
| Lead Solder Dipping Temperature (1.59 mm (1/16 inch) below seating plane) ^[7] | 260°C for 5 seconds ^[8] | | | | |
| Wave Soldering Temperature (at 2 mm distance from the body) | 250°C for 3 seconds | | | | |

Notes:

1. Absolute maximum ratings for HER, Yellow, and Green elements of the multicolor arrays are identical to the HDSP-4830/4840/4850 maximum ratings.
2. See Figure 1 to establish pulsed operating conditions. Maximum pulse width is 1.5 ms.
3. See Figure 2 to establish pulsed operating conditions. Maximum pulse width is 1.5 ms.
4. See Figure 8 to establish pulsed operating conditions. Maximum pulse width is 2 ms.
5. Derate maximum DC current for Red above $T_A = 62^\circ\text{C}$ at $0.79 \text{ mA}/^\circ\text{C}$, and AlGaAs Red above $T_A = 91^\circ\text{C}$ at $0.8 \text{ mA}/^\circ\text{C}$. See Figure 3.
6. Derate maximum DC current for HER above $T_A = 48^\circ\text{C}$ at $0.58 \text{ mA}/^\circ\text{C}$, Yellow above $T_A = 70^\circ\text{C}$ at $0.66 \text{ mA}/^\circ\text{C}$, and Green above $T_A = 37^\circ\text{C}$ at $0.48 \text{ mA}/^\circ\text{C}$. See Figure 9.
7. Clean only in water, isopropanol, ethanol, Freon TF or TE (or equivalent), or Genesolve DI-15 (or equivalent).
8. Maximum tolerable component side temperature is 134°C during solder process.

Internal Circuit Diagram

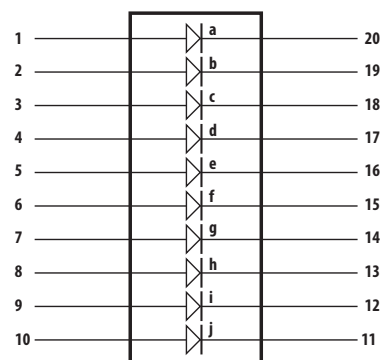

| Pin | Function | Pin | Function |
|-----|----------|-----|-----------|
| 1 | Anode a | 11 | Cathode j |
| 2 | Anode b | 12 | Cathode i |
| 3 | Anode c | 13 | Cathode h |
| 4 | Anode d | 14 | Cathode g |
| 5 | Anode e | 15 | Cathode f |
| 6 | Anode f | 16 | Cathode e |
| 7 | Anode g | 17 | Cathode d |
| 8 | Anode h | 18 | Cathode c |
| 9 | Anode i | 19 | Cathode b |
| 10 | Anode j | 20 | Cathode a |

Multicolor Array Segment Colors

| Segment | HDSP-4832 Segment Color | HDSP-4836 Segment Color |
|---------|----------------------------|----------------------------|
| a | HER | HER |
| b | HER | HER |
| c | HER | Yellow |
| d | Yellow | Yellow |
| e | Yellow | Green |
| f | Yellow | Green |
| g | Yellow | Yellow |
| h | Green | Yellow |
| i | Green | HER |
| j | Green | HER |

Electrical/Optical Characteristics at $T_A = 25^\circ\text{C}$ ^[4]

Red HDSP-4820

| Parameter | Symbol | Min. | Typ. | Max. | Units | Test Conditions |
|--|-----------------------------|------|------|------|------------------------|--------------------------|
| Luminous Intensity per LED (Unit Average) ^[1] | I_V | 610 | 1250 | | μcd | $I_F = 20\text{ mA}$ |
| Peak Wavelength | λ_{PEAK} | | 655 | | nm | |
| Dominant Wavelength ^[2] | λ_d | | 645 | | nm | |
| Forward Voltage per LED | V_F | | 1.6 | 2.0 | V | $I_F = 20\text{ mA}$ |
| Reverse Voltage per LED ^[5] | V_R | 3 | 12 | | V | $I_R = 100\ \mu\text{A}$ |
| Temperature Coefficient V_F per LED | $\Delta V_F/^\circ\text{C}$ | | -2.0 | | mV/ $^\circ\text{C}$ | |
| Thermal Resistance LED Junction-to-Pin | $R\theta_{\text{J-PIN}}$ | | 300 | | $^\circ\text{C/W/LED}$ | |

AlGaAs Red HLCP-J100

| Parameter | Symbol | Min. | Typ. | Max. | Units | Test Conditions |
|---|-----------------------------|------|--------------|------|------------------------|---|
| Luminous Intensity per LED (Unit Average) ^[1] | I_V | 600 | 1000 5200 | | μcd | $I_F = 1\text{ mA}$ $I_F = 20\text{ mA Pk};$ 1 of 4 Duty Factor |
| Peak Wavelength | λ_{PEAK} | | 645 | | nm | |
| Dominant Wavelength ^[2] | λ_d | | 637 | | nm | |
| Forward Voltage per LED | V_F | | 1.6 1.8 | 2.2 | V | $I_F = 1\text{ mA}$ $I_F = 20\text{ mA}$ |
| Reverse Voltage per LED ^[5] | V_R | 5 | 1.5 | | V | $I_R = 100\ \mu\text{A}$ |
| Temperature Coefficient V_F per LED | $\Delta V_F/^\circ\text{C}$ | | -2.0 | | mV/ $^\circ\text{C}$ | |
| Thermal Resistance LED Junction-to-Pin | $R\theta_{\text{J-PIN}}$ | | 300 | | $^\circ\text{C/W/LED}$ | |

High Efficiency Red HDSP-4830

| Parameter | Symbol | Min. | Typ. | Max. | Units | Test Conditions |
|--|-------------------------------|------|------|------|------------------------|-------------------------|
| Luminous Intensity per LED (Unit Average) ^[1,4] | I_V | 900 | 3500 | | μcd | $I_F = 10 \text{ mA}$ |
| Peak Wavelength | λ_{PEAK} | | 635 | | nm | |
| Dominant Wavelength ^[2] | λ_d | | 626 | | nm | |
| Forward Voltage per LED | V_F | | 2.1 | 2.5 | V | $I_F = 20 \text{ mA}$ |
| Reverse Voltage per LED ^[5] | V_R | 3 | 30 | | V | $I_R = 100 \mu\text{A}$ |
| Temperature Coefficient V_F per LED | $\Delta V_F / ^\circ\text{C}$ | | -2.0 | | mV/ $^\circ\text{C}$ | |
| Thermal Resistance LED Junction-to-Pin | $R\theta_{\text{J-PIN}}$ | | 300 | | $^\circ\text{C/W/LED}$ | |

Yellow HDSP-4840

| Parameter | Symbol | Min. | Typ. | Max. | Units | Test Conditions |
|--|-------------------------------|------|------|------|------------------------|-------------------------|
| Luminous Intensity per LED (Unit Average) ^[1,4] | I_V | 600 | 1900 | | μcd | $I_F = 10 \text{ mA}$ |
| Peak Wavelength | λ_{PEAK} | | 583 | | nm | |
| Dominant Wavelength ^[2,3] | λ_d | 581 | 585 | 592 | nm | |
| Forward Voltage per LED | V_F | | 2.2 | 2.5 | V | $I_F = 20 \text{ mA}$ |
| Reverse Voltage per LED ^[5] | V_R | 3 | 40 | | V | $I_R = 100 \mu\text{A}$ |
| Temperature Coefficient V_F per LED | $\Delta V_F / ^\circ\text{C}$ | | -2.0 | | mV/ $^\circ\text{C}$ | |
| Thermal Resistance LED Junction-to-Pin | $R\theta_{\text{J-PIN}}$ | | 300 | | $^\circ\text{C/W/LED}$ | |

Green HDSP-4850

| Parameter | Symbol | Min. | Typ. | Max. | Units | Test Conditions |
|--|-------------------------------|------|------|------|------------------------|-------------------------|
| Luminous Intensity per LED (Unit Average) ^[1,4] | I_V | 600 | 1900 | | μcd | $I_F = 10 \text{ mA}$ |
| Peak Wavelength | λ_{PEAK} | | 566 | | nm | |
| Dominant Wavelength ^[2,3] | λ_d | | 571 | 577 | nm | |
| Forward Voltage per LED | V_F | | 2.1 | 2.5 | V | $I_F = 20 \text{ mA}$ |
| Reverse Voltage per LED ^[5] | V_R | 3 | 50 | | V | $I_R = 100 \mu\text{A}$ |
| Temperature Coefficient V_F per LED | $\Delta V_F / ^\circ\text{C}$ | | -2.0 | | mV/ $^\circ\text{C}$ | |
| Thermal Resistance LED Junction-to-Pin | $R\theta_{\text{J-PIN}}$ | | 300 | | $^\circ\text{C/W/LED}$ | |

Notes:

1. The bar graph arrays are categorized for luminous intensity. The category is designated by a letter located on the side of the package.
2. The dominant wavelength, λ_d , is derived from the CIE chromaticity diagram and is that single wavelength which defines the color of the device.
3. The HDSP-4832/-4836/-4840/-4850 bar graph arrays are categorized by dominant wavelength with the category designated by a number adjacent to the intensity category letter. Only the yellow elements of the HDSP-4832/-4836 are categorized for color.
4. Electrical/optical characteristics of the High-Efficiency Red elements of the HDSP-4832/-4836 are identical to the HDSP-4830 characteristics. Characteristics of Yellow elements of the HDSP-4832/-4836 are identical to the HDSP-4840. Characteristics of Green elements of the HDSP-4832/-4836 are identical to the HDSP-4850.
5. Reverse voltage per LED should be limited to 3.0 V max. for the HDSP-4820/-4830/-4840/-4850/-4832/-4836 and 5.0 V max. for the HLCP-J100.

Red, AlGaAs Red

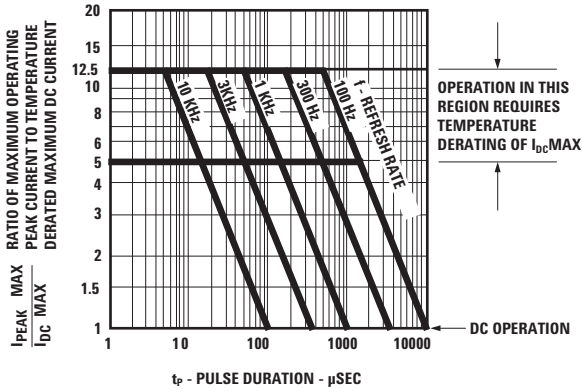


Figure 1. Maximum Tolerable Peak Current vs. Pulse Duration – Red.

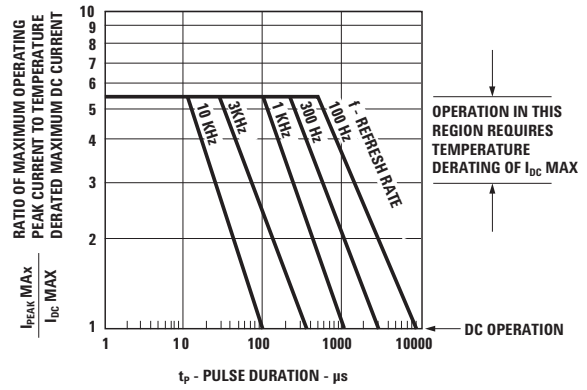


Figure 2. Maximum Tolerable Peak Current vs. Pulse Duration – AlGaAs Red.

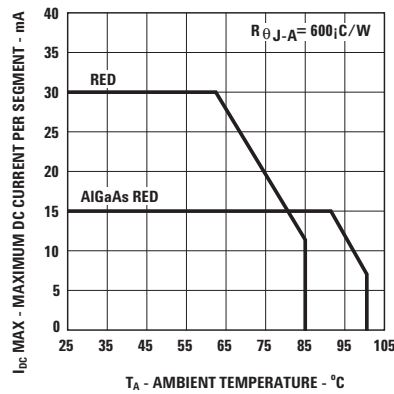


Figure 3. Maximum Allowable DC Current vs. Ambient Temperature.

$T_{JMAX} = 100^{\circ}\text{C}$ for Red and $T_{JMAX} = 110^{\circ}\text{C}$ for AlGaAs Red.

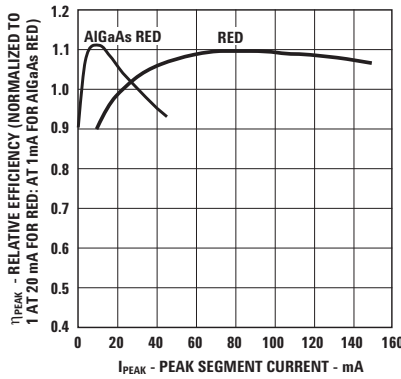


Figure 4. Relative Efficiency (Luminous Intensity per Unit Current) vs. Peak Current.

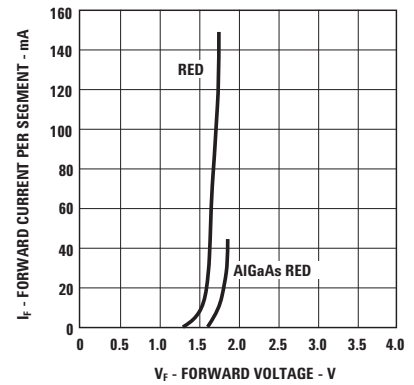


Figure 5. Forward Current vs. Forward Voltage.

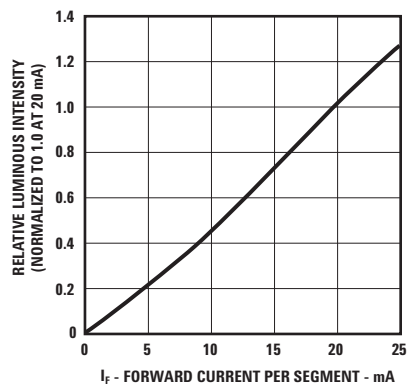


Figure 6. Relative Luminous Intensity vs. DC Forward Current – Red.

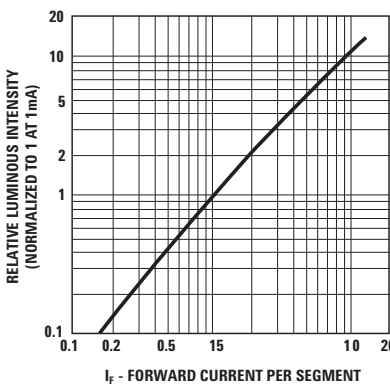


Figure 7. Relative Luminous Intensity vs. DC Forward Current – AlGaAs.

For a Detailed Explanation on the Use of Data Sheet Information and Recommended Soldering Procedures, See Application Note 1005.

HER, Yellow, Green

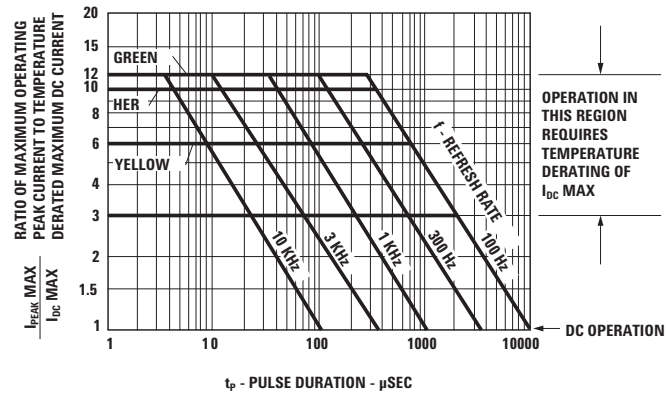


Figure 8. Maximum Tolerable Peak Current vs. Pulse Duration –

HER/Yellow/Green.

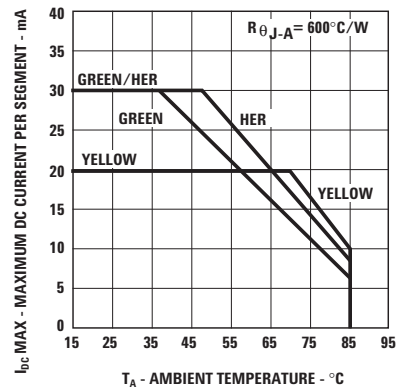


Figure 9. Maximum Allowable DC Current vs. Ambient Temperature. $T_{JMAX} = 100^{\circ}\text{C}$.

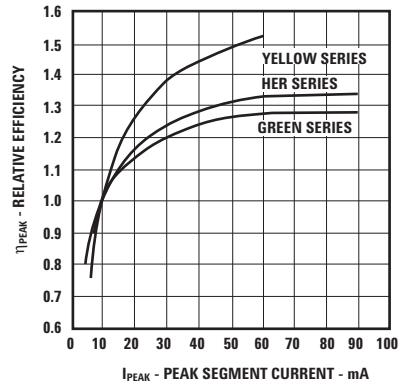


Figure 10. Relative Efficiency (Luminous Intensity per Unit Current) vs. Peak Current.

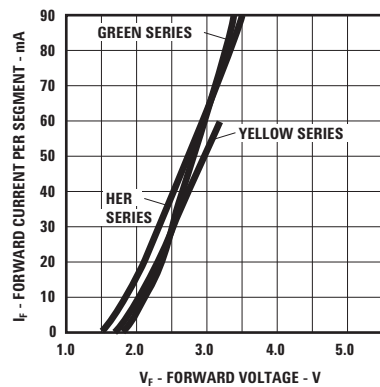


Figure 11. Forward Current vs. Forward Voltage.

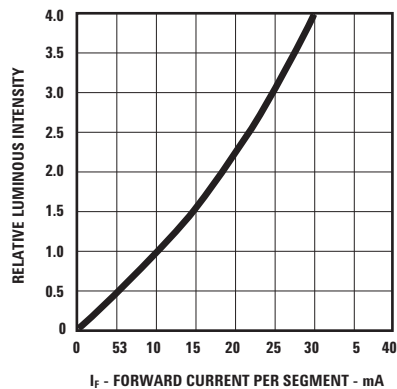


Figure 12. Relative Luminous Intensity vs. DC Forward Current.

For a Detailed Explanation on the Use of Data Sheet Information and Recommended Soldering Procedures, See Application Note 1005.

Electrical/Optical

These versatile bar graph arrays are composed of ten light emitting diodes. The light from each LED is optically stretched to form individual elements. The Red (HDSP-4820) bar graph array LEDs use a p-n junction diffused into a GaAsP epitaxial layer on a GaAs substrate. The AlGaAs Red (HLCP-J100) bar graph array LEDs use double heterojunction AlGaAs on a GaAs substrate. HER (HDSP-4830) and Yellow (HDSP-4840) bar graph array LEDs use a GaAsP epitaxial layer on a GaP substrate. Green (HDSP-4850) bar graph array LEDs use liquid phase GaP epitaxial layer on a GaP substrate. The multicolor bar graph arrays (HDSP-4832/4836) have HER, Yellow, and Green LEDs in one package. These displays are designed for strobed operation. The typical forward voltage values can be scaled from Figures 5 and 11. These values should be used to calculate the current limiting resistor value and typical power consumption. Expected maximum V_F values for driver circuit design and maximum power dissipation may be calculated using the V_{FMAX} models:

Standard Red HDSP-4820 series

$$V_{FMAX} = 1.8 \text{ V} + I_{Peak} (10 \Omega)$$

For: $I_{Peak} \geq 5 \text{ mA}$

AlGaAs Red HLCP-J100 series

$$V_{FMAX} = 1.8 \text{ V} + I_{Peak} (20 \Omega)$$

For: $I_{Peak} \leq 20 \text{ mA}$

$$V_{FMAX} = 2.0 \text{ V} + I_{Peak} (10 \Omega)$$

For: $I_{Peak} \geq 20 \text{ mA}$

HER (HDSP-4830) and Yellow (HDSP-4840) series

$$V_{FMAX} = 1.6 + I_{Peak} (45 \Omega)$$

For: $5 \text{ mA} \leq I_{Peak} \leq 20 \text{ mA}$

$$V_{FMAX} = 1.75 + I_{Peak} (38 \Omega)$$

For: $I_{Peak} \geq 20 \text{ mA}$

Green (HDSP-4850) series

$$V_{FMAX} = 2.0 + I_{Peak} (50 \Omega)$$

For: $I_{Peak} > 5 \text{ mA}$

Figures 4 and 10 allow the designer to calculate the luminous intensity at different peak and average currents. The following equation calculates intensity at different peak and average currents:

$$I_VAVG = (I_{F AVG} / I_{F AVG \text{ DATA SHEET}}) \eta_{peak} (I_V \text{ DATA SHEET})$$

Where:

I_VAVG is the calculated time averaged luminous intensity resulting from $I_{F AVG}$.

$I_{F AVG}$ is the desired time averaged LED current.

$I_{F AVG \text{ DATA SHEET}}$ is the data sheet test current for $I_V \text{ DATA SHEET}$.

η_{peak} is the relative efficiency at the peak current, scaled from Figure 4 or 10.

$I_V \text{ DATA SHEET}$ is the data sheet luminous intensity, resulting from $I_{F AVG \text{ DATA SHEET}}$.

For example, what is the luminous intensity of an HDSP-4830 driven at 50 mA peak 1/5 duty factor?

$$I_{F AVG} = (50 \text{ mA}) (0.2) = 10 \text{ mA}$$

$$I_{F AVG \text{ DATA SHEET}} = 10 \text{ mA}$$

$$\eta_{peak} = 1.3$$

$$I_V \text{ DATA SHEET} = 3500 \mu\text{cd}$$

Therefore

$$I_VAVG = (10 \text{ mA} / 10 \text{ mA}) (1.3) (3500 \text{ mcd}) = 4550 \text{ mcd}$$

For product information and a complete list of distributors, please go to our web site: www.avagotech.com

Avago, Avago Technologies, and the A logo are trademarks of Avago Technologies in the United States and other countries. Data subject to change. Copyright © 2005-2009 Avago Technologies. All rights reserved. Obsoletes AV01-0277EN AV02-1798EN - November 5, 2009

AVAGO
TECHNOLOGIES



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.