

Features

Unregulated Converter

- 3kVDC or 4kVDC Isolation
- Optional Continuous Short Circuit Protected
- Custom Solutions Available
- UL94V-0 Package Material
- Efficiency to 84 %
- Suitable for IGBT Applications

Description

The RK and RH Series DC/DC-Converter complements Recom's industrial range of converters with very high isolations of 3KV and 4kVDC. The extended operating temperature range covering -40°C to $+90^{\circ}\text{C}$ is a standard feature. The converters are EN-60601-1 certified, making them suitable for medical as well as IGBT driver applications.

Selection Guide

Part Number		Input Voltage	Output Voltage	Output Current	Efficiency	Max Capacitive Load ⁽¹⁾
SIP 7	(4kV)	(VDC)	(VDC)	(mA)	(%)	
RK-xx05S*	(H)	5, 12, 15, 24	5	200	70-78	1000μF
RK-xx09S*	(H)	5, 12, 15, 24	9	111	70-80	1000μF
RK-xx12S*	(H)	5, 12, 15, 24	12	84	78-82	470μF
RK-xx15S*	(H)	5, 12, 15, 24	15	66	80-82	470μF
RH-xx05D*	(H)	5, 12, 15, 24	±5	±100	74-78	±470μF
RH-xx09D*	(H)	5, 12, 15, 24	±9	±56	76-79	±470μF
RH-xx12D*	(H)	5, 12, 15, 24	±12	±42	78-84	±220μF
RH-xx15D*	(H)	5, 12, 15, 24	±15	±33	80-84	±220μF
RH-xx1509D*	(H)	5, 12, 24	+15/-9	+33/-56	70-81	+220/-470μF

xx = Input Voltage. Other input and output voltage combinations available on request.

* add Suffix "P" for Continuous Short Circuit Protection, e.g. RK-0505S/P, RK-0505S/HP

Specifications (measured at $T_A = 25^{\circ}\text{C}$, nominal input voltage, full load and after warm-up)

Input Voltage Range		±10%
Output Voltage Accuracy		±5%
Line Voltage Regulation		1.2%/1% of Vin typ.
Load Voltage Regulation (10% to 100% full load)	5V output type	15% max.
	9V, 12V, 15V, 24V output types	10% max.
	RH-xx1509D	10% max.
Output Ripple and Noise (20MHz limited)	Single output types	100mVp-p max.
	Dual output types	±75mVp-p max.
Operating Frequency	RK types	50kHz min. / 100kHz typ. / 105kHz max.
	RH types	57kHz min. / 100kHz typ. / 105kHz max.
	RK-xx1509D	50kHz min. / 88kHz typ.
Efficiency at Full Load		70% min. / 80% typ.
Minimum Load = 0%		Specifications valid for 10% minimum load only.
Isolation Voltage		(tested for 1 second) 3000VDC
		(rated for 1 minute***) 1500VAC / 60Hz
Isolation Voltage	H-Suffix	(tested for 1 second) 4000VDC
	H-Suffix	(rated for 1 minute***) 2000VAC / 60Hz
Isolation Capacitance	RK types	20pF min. / 75pF max.
	RH types	20pF min. / 65pF max.
Isolation Resistance		15 GΩ min.
Short Circuit Protection		1 Second
P-Suffix		Continuous
Operating Temperature Range (free air convection, without derating)		-40°C to +90°C (see Graph)
Storage Temperature Range		-55°C to +125°C
Relative Humidity		95% RH

continued on next page

ECONOLINE

DC/DC-Converter


with 3 year Warranty

RECOM

1 Watt

SIP7


Single & Dual Output

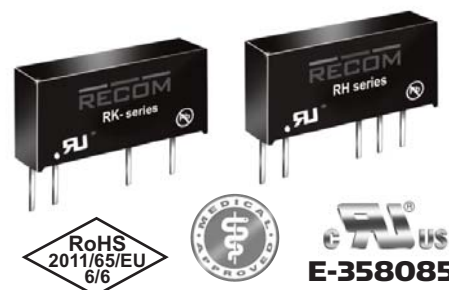

EN-60950-1 Certified
IEC/EN-60601-1 Certified**
UL-60950-1 Certified**
**** +15/-9 Version excluded**

RK_RH

Derating-Graph (Ambient Temperature)

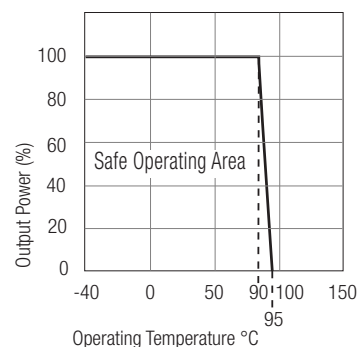

***Any data referred to in this datasheet are of indicative nature and based on our practical experience only. For further details, please refer to our Application Notes.



Refer to Application Notes

Specifications (measured at $T_A = 25^\circ\text{C}$, nominal input voltage, full load and after warm-up)



Package Weight	2.6g	
H-Suffix	2.8g	
Packing Quantity	25 pcs per Tube	
MTBF (+25°C)	RK types	992 x 10 ³ hours
Detailed Information see Application Notes chapter "MTBF"	RH types	1012 x 10 ³ hours
	RK types	145 x 10 ³ hours
(+85°C)	RH types	151 x 10 ³ hours
using MIL-HDBK 217F		
Certifications		
EN General Safety	Report: SPCLVD1109103	EN60950-1: 2006 + A12:2011
EN Medical Safety	Report: SPCMD1205098-4	IEC/EN 60601-1: 2006, 3rd Edition
UL General Safety	Report: E358085	UL60950-1, 2nd Edition

Typical Characteristics



RK-xx05S

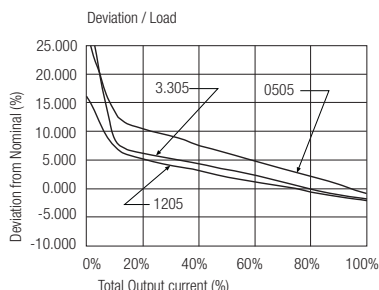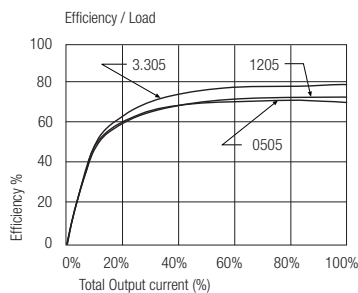



RK-xx09S

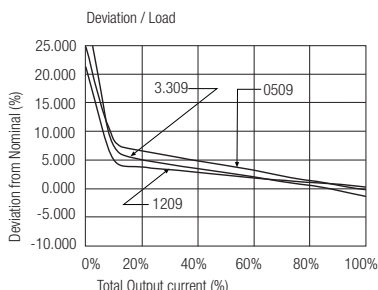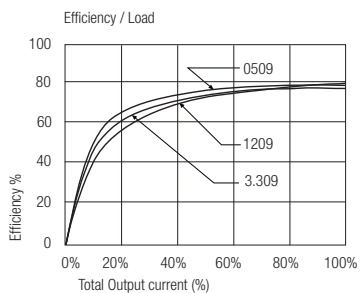



RK-xx12S

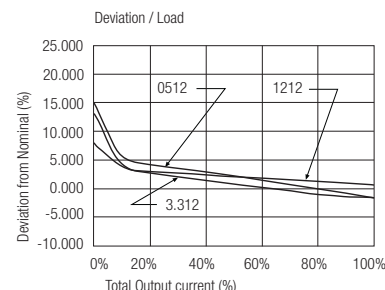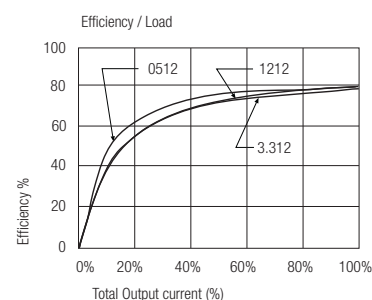



RK-xx15S

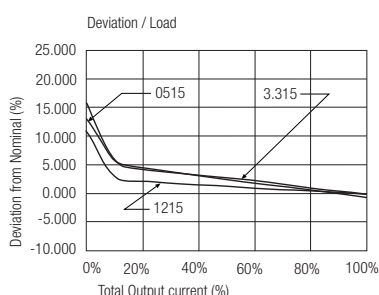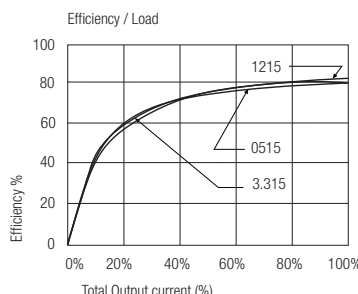

RH-xx05D

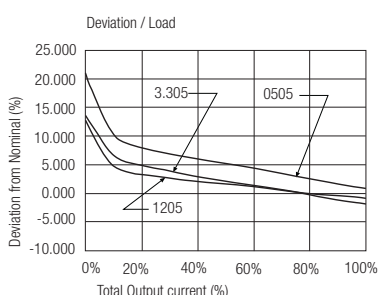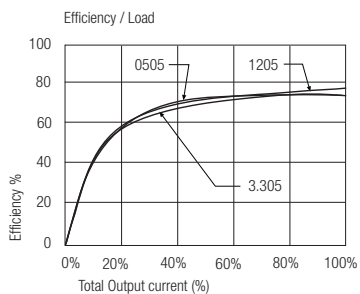


RH-xx09D

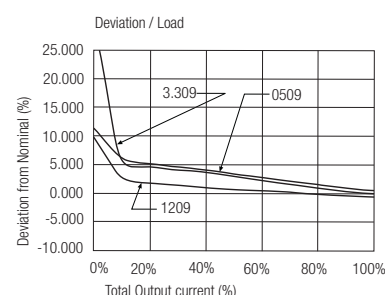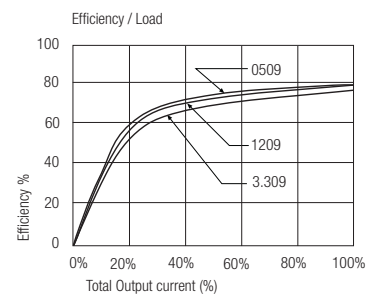


Typical Characteristics


RH-xx12D

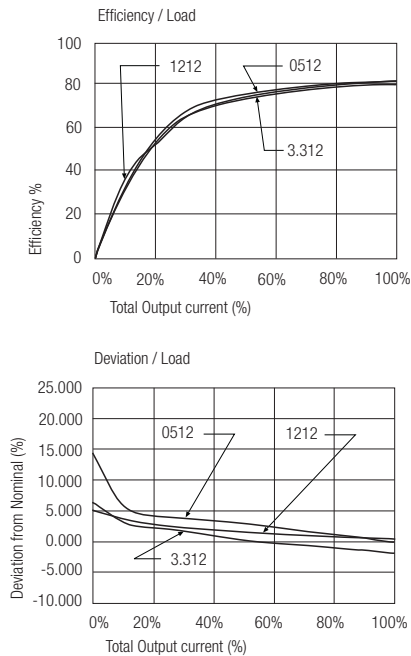

RH-xx15D

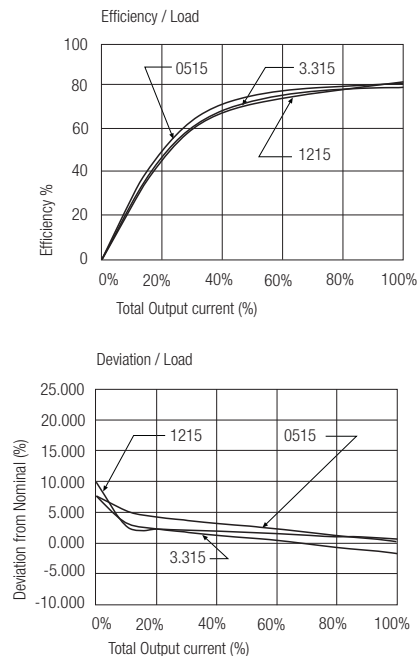

IGBT Application Circuit

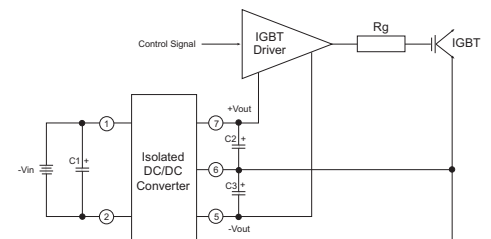


Notes


Note 1 Maximum capacitive load is defined as the capacitive load that will allow start up in under 1 second without damage to the converter.

Package Style and Pinning (mm)


7 PIN SIP Package

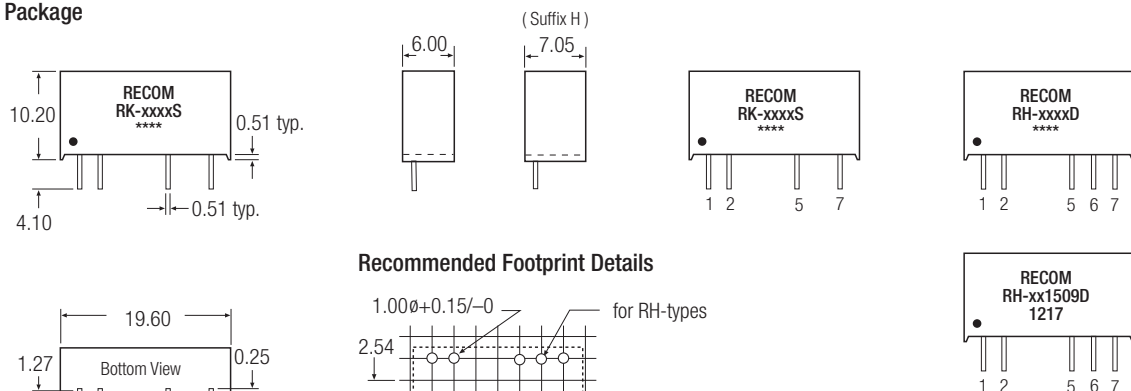

Recommended Footprint Details

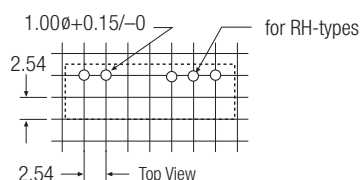

Recommended Footprint Details

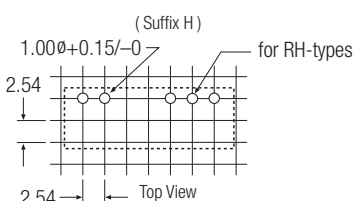

Pin Connections
RK-xxxxS

Pin #	Single
1	+Vin
2	-Vin
5	-Vout
7	+Vout

Pin Connections
RH-xxxxD

Pin #	Dual
1	+Vin
2	-Vin
5	-Vout
6	Com
7	+Vout

XX.X ± 0.5 mm
XX.XX ± 0.25 mm

The product information and specifications are subject to change without prior notice. RECOM products are not authorized for use in safety-critical applications (such as life support) without RECOM's explicit written consent. A safety-critical application is defined as an application where a failure of a RECOM product may reasonably be expected to endanger or cause loss of life, inflict bodily harm or damage property. The buyer shall indemnify and hold harmless RECOM, its affiliated companies and its representatives against any damage claims in connection with the unauthorized use of RECOM products in such safety-critical applications.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.