

## Features

## Unregulated Converter

- 3kVDC or 4kVDC Isolation
- Optional Continuous Short Circuit Protected
- Custom Solutions Available
- UL94V-0 Package Material
- Efficiency to 84 %
- Suitable for IGBT Applications

### Description

The RK and RH Series DC/DC-Converter complements Recom's industrial range of converters with very high isolations of 3KV and 4kVDC. The extended operating temperature range covering  $-40^{\circ}\text{C}$  to  $+90^{\circ}\text{C}$  is a standard feature. The converters are EN-60601-1 certified, making them suitable for medical as well as IGBT driver applications.

### Selection Guide

| Part Number |       | Input Voltage (VDC) | Output Voltage (VDC) | Output Current (mA) | Efficiency (%) | Max Capacitive Load <sup>(1)</sup> |
|-------------|-------|---------------------|----------------------|---------------------|----------------|------------------------------------|
| SIP 7       | (4kV) |                     |                      |                     |                |                                    |
| RK-xx05S*   | (H)   | 5, 12, 15, 24       | 5                    | 200                 | 70-78          | 1000 $\mu\text{F}$                 |
| RK-xx09S*   | (H)   | 5, 12, 15, 24       | 9                    | 111                 | 70-80          | 1000 $\mu\text{F}$                 |
| RK-xx12S*   | (H)   | 5, 12, 15, 24       | 12                   | 84                  | 78-82          | 470 $\mu\text{F}$                  |
| RK-xx15S*   | (H)   | 5, 12, 15, 24       | 15                   | 66                  | 80-82          | 470 $\mu\text{F}$                  |
| RH-xx05D*   | (H)   | 5, 12, 15, 24       | $\pm 5$              | $\pm 100$           | 74-78          | $\pm 470\mu\text{F}$               |
| RH-xx09D*   | (H)   | 5, 12, 15, 24       | $\pm 9$              | $\pm 56$            | 76-79          | $\pm 470\mu\text{F}$               |
| RH-xx12D*   | (H)   | 5, 12, 15, 24       | $\pm 12$             | $\pm 42$            | 78-84          | $\pm 220\mu\text{F}$               |
| RH-xx15D*   | (H)   | 5, 12, 15, 24       | $\pm 15$             | $\pm 33$            | 80-84          | $\pm 220\mu\text{F}$               |
| RH-xx1509D* | (H)   | 5, 12, 24           | +15/-9               | +33/-56             | 70-81          | +220/-470 $\mu\text{F}$            |

xx = Input Voltage. Other input and output voltage combinations available on request.

\* add Suffix "P" for Continuous Short Circuit Protection, e.g. RK-0505S/P, RK-0505S/HP

### Specifications (measured at $T_A = 25^{\circ}\text{C}$ , nominal input voltage, full load and after warm-up)

|                                                                     |                                                            |                                        |
|---------------------------------------------------------------------|------------------------------------------------------------|----------------------------------------|
| Input Voltage Range                                                 | $\pm 10\%$                                                 |                                        |
| Output Voltage Accuracy                                             | $\pm 5\%$                                                  |                                        |
| Line Voltage Regulation                                             | 1.2%/1% of $V_{in}$ typ.                                   |                                        |
| Load Voltage Regulation                                             | 5V output type                                             | 15% max.                               |
| (10% to 100% full load)                                             | 9V, 12V, 15V, 24V output types                             | 10% max.                               |
|                                                                     | RH-xx1509D                                                 | 10% max.                               |
| Output Ripple and Noise (20MHz limited)                             | Single output types                                        | 100mVp-p max.                          |
|                                                                     | Dual output types                                          | $\pm 75\text{mVp-p}$ max.              |
| Operating Frequency                                                 | RK types                                                   | 50kHz min. / 100kHz typ. / 105kHz max. |
|                                                                     | RH types                                                   | 57kHz min. / 100kHz typ. / 105kHz max. |
|                                                                     | RK-xx1509D                                                 | 50kHz min. / 88kHz typ.                |
| Efficiency at Full Load                                             | 70% min. / 80% typ.                                        |                                        |
| Minimum Load = 0%                                                   | Specifications valid for 10% minimum load only.            |                                        |
| Isolation Voltage                                                   | (tested for 1 second)                                      | 3000VDC                                |
|                                                                     | (rated for 1 minute***)                                    | 1500VAC / 60Hz                         |
| Isolation Voltage                                                   | H-Suffix                                                   | (tested for 1 second)                  |
|                                                                     | H-Suffix                                                   | (rated for 1 minute***)                |
|                                                                     |                                                            | 4000VDC                                |
|                                                                     |                                                            | 2000VAC / 60Hz                         |
| Isolation Capacitance                                               | RK types                                                   | 20pF min. / 75pF max.                  |
|                                                                     | RH types                                                   | 20pF min. / 65pF max.                  |
| Isolation Resistance                                                | 15 G $\Omega$ min.                                         |                                        |
| Short Circuit Protection                                            | 1 Second                                                   |                                        |
| P-Suffix                                                            | Continuous                                                 |                                        |
| Operating Temperature Range (free air convection, without derating) | $-40^{\circ}\text{C}$ to $+90^{\circ}\text{C}$ (see Graph) |                                        |
| Storage Temperature Range                                           | $-55^{\circ}\text{C}$ to $+125^{\circ}\text{C}$            |                                        |
| Relative Humidity                                                   | 95% RH                                                     |                                        |

continued on next page

## ECONOLINE

## DC/DC-Converter


with 3 year Warranty

# RECOM

## 1 Watt

## SIP7

## Single & Dual Output

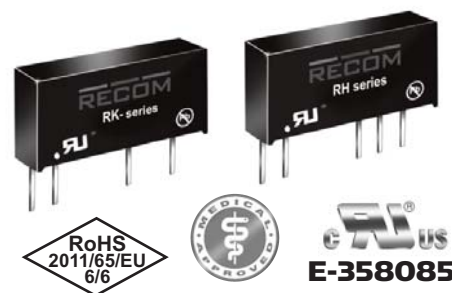

**EN-60950-1 Certified**  
**IEC/EN-60601-1 Certified\*\***  
**UL-60950-1 Certified\*\***  
**\*\* +15/-9 Version excluded**

# RK\_RH

## Derating-Graph (Ambient Temperature)



\*\*\*Any data referred to in this datasheet are of indicative nature and based on our practical experience only. For further details, please refer to our Application Notes.



Refer to Application Notes

### Specifications (measured at $T_A = 25^\circ\text{C}$ , nominal input voltage, full load and after warm-up)



|                     |                        |                                   |
|---------------------|------------------------|-----------------------------------|
| Package Weight      |                        | 2.6g                              |
| H-Suffix            |                        | 2.8g                              |
| Packing Quantity    |                        | 25 pcs per Tube                   |
| MTBF (+25°C)        | RK types<br>RH types   | 992 x 10 <sup>3</sup> hours       |
| (+85°C)             |                        | 1012 x 10 <sup>3</sup> hours      |
|                     | RK types               | 145 x 10 <sup>3</sup> hours       |
|                     | RH types               | 151 x 10 <sup>3</sup> hours       |
| using MIL-HDBK 217F |                        |                                   |
| Certifications      |                        |                                   |
| EN General Safety   | Report: SPCLVD1109103  | EN60950-1: 2006 + A1:2011         |
| EN Medical Safety   | Report: SPCMD1205098-4 | IEC/EN 60601-1: 2006, 3rd Edition |
| UL General Safety   | Report: E358085        | UL60950-1, 2nd Edition            |

### Typical Characteristics



#### RK-xx05S

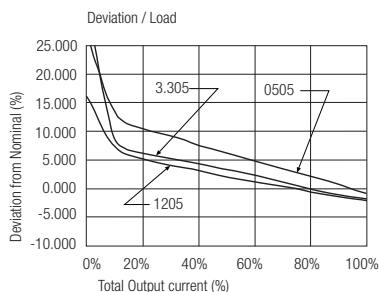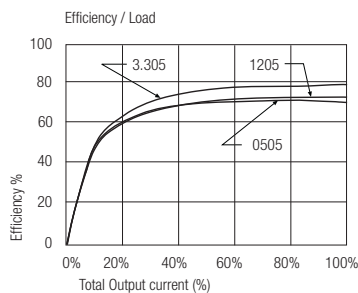



#### RK-xx09S

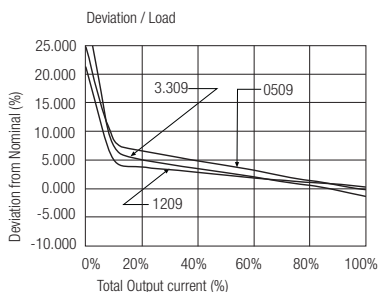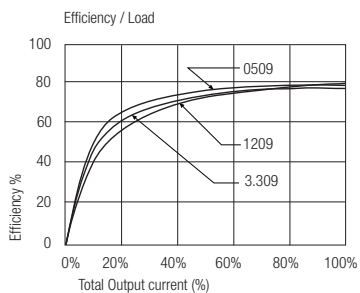



#### RK-xx12S

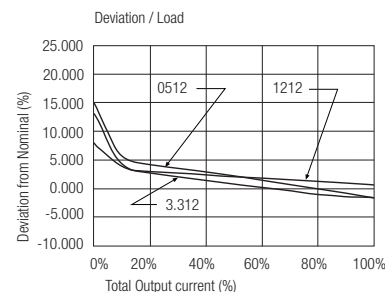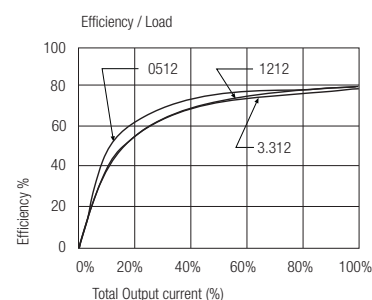



#### RK-xx15S

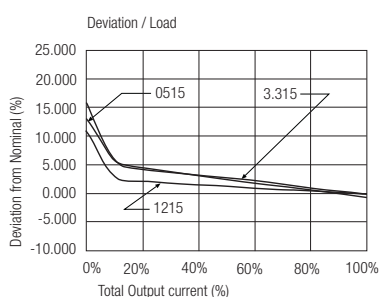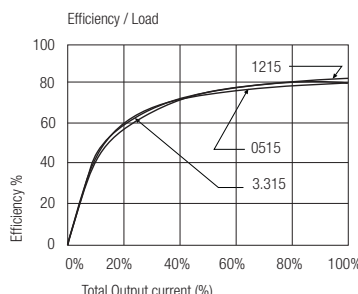

#### RH-xx05D

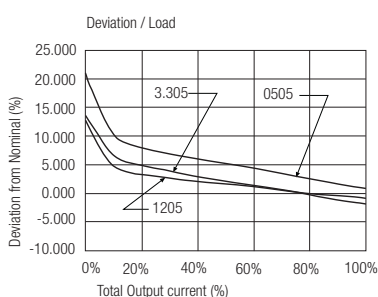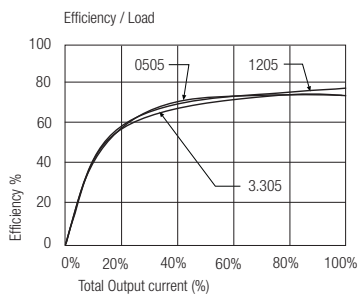

#### RH-xx09D

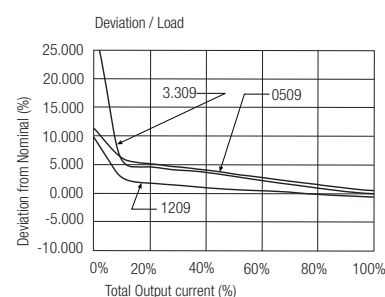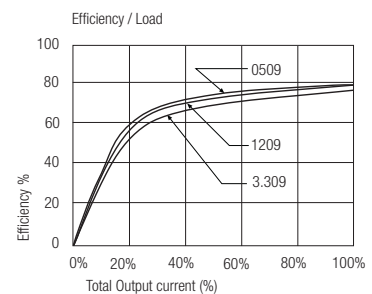

**Typical Characteristics**

**RH-xx12D**



**RH-xx15D**



**IGBT Application  
Circuit**




**Notes**


Note 1 Maximum capacitive load is defined as the capacitive load that will allow start up in under 1 second without damage to the converter.

**Package Style and Pinning (mm)**


**7 PIN SIP Package**

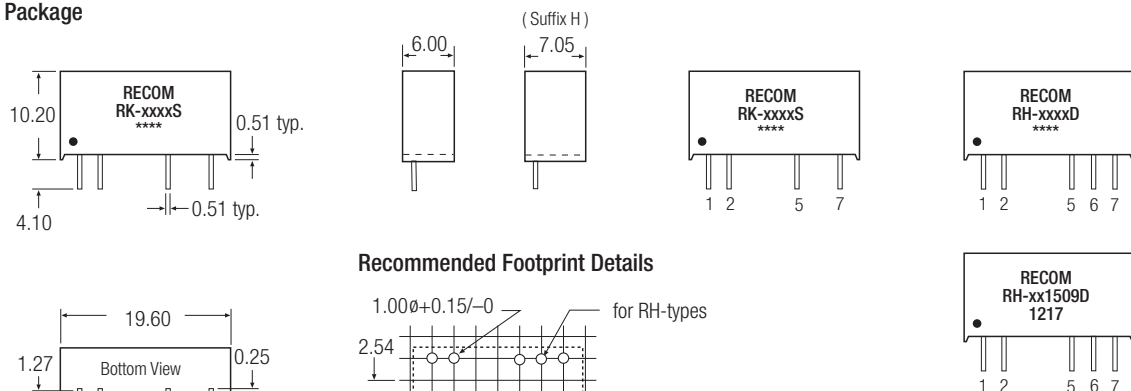

**Recommended Footprint Details**

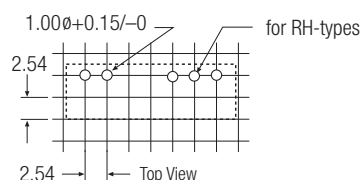

**Recommended Footprint Details**

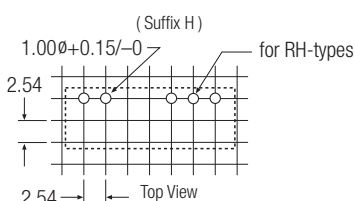

**Pin Connections  
RK-xxxxS**

| Pin # | Single |
|-------|--------|
| 1     | +Vin   |
| 2     | -Vin   |
| 5     | -Vout  |
| 7     | +Vout  |

**Pin Connections  
RH-xxxxD**

| Pin # | Dual  |
|-------|-------|
| 1     | +Vin  |
| 2     | -Vin  |
| 5     | -Vout |
| 6     | Com   |
| 7     | +Vout |

XX.X ± 0.5 mm  
XX.XX ± 0.25 mm

The product information and specifications are subject to change without prior notice. RECOM products are not authorized for use in safety-critical applications (such as life support) without RECOM's explicit written consent. A safety-critical application is defined as an application where a failure of a RECOM product may reasonably be expected to endanger or cause loss of life, inflict bodily harm or damage property. The buyer shall indemnify and hold harmless RECOM, its affiliated companies and its representatives against any damage claims in connection with the unauthorized use of RECOM products in such safety-critical applications.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.