

## Features

## Regulated Converter

- 1kVDC or 2kVDC Isolation
- SMD Package Styles
- Single Regulated Output (Internal Linear Regulator)
- UL94V-0 Package Material
- Optional Continuous Short Circuit Protected
- Fully Encapsulated
- Efficiency to 62 %
- Built-In EN55022 Class A Filter

### Description

The R0.5Z series DC/DC converter has been designed for isolating or converting DC power rails where board space is at a premium. Although no larger than a standard unregulated SMD converter, the R0.5Z series also incorporates an internal linear regulator to deliver a stable output voltage which makes it ideal for powering logic level or supply voltage sensitive circuitry.

### Specifications (measured at $T_A = 25^\circ\text{C}$ , nominal input voltage, full load and after warm-up)

| Part Number SMD | Input Voltage (VDC) | Output Voltage (VDC) | Output Current (mA) | Efficiency (%) | Max Capacitive Load <sup>(1)</sup> |
|-----------------|---------------------|----------------------|---------------------|----------------|------------------------------------|
| R0.5Z-xx05*     | 5, 12, 15, 24       | 5                    | 100                 | 50             | 1000 $\mu\text{F}$                 |
| R0.5Z-xx12*     | 5, 12, 15, 24       | 12                   | 42                  | 60             | 220 $\mu\text{F}$                  |
| R0.5Z-xx15*     | 5, 12, 15, 24       | 15                   | 33                  | 62             | 220 $\mu\text{F}$                  |

xx = Input Voltage

\* add Suffix "P" for Continuous Short Circuit Protection, e.g. R0.5Z-0505/P

\* add Suffix „H" for 2kVDC Isolation Voltage, e.g. R0.5Z-0505/H

\* add suffix -R for tape & reel packing e.g. R0.5Z-0505-R, R0.5Z.0505/P-R

For more details and dimensions of the tapes and reels see Application Notes

### Specifications (Core Operating Area)

|                                                  |          |                                                           |                                          |                              |
|--------------------------------------------------|----------|-----------------------------------------------------------|------------------------------------------|------------------------------|
| Input Voltage Range                              |          |                                                           | ±5%                                      |                              |
| Output Voltage Accuracy                          |          |                                                           | ±5%                                      |                              |
| Line Voltage Regulation                          |          |                                                           | 1% max.                                  |                              |
| Load Voltage Regulation (10% to 100% full load)  |          |                                                           | 1% max.                                  |                              |
| Output Ripple and Noise (20MHz limited)          |          |                                                           | 100mVp-p max.                            |                              |
| Operating Frequency                              |          |                                                           | 20kHz min. / 50kHz typ. / 90kHz max.     |                              |
| Efficiency at Full Load                          |          |                                                           | 50% min. / 60% typ.                      |                              |
| Minimum Load                                     |          |                                                           | 10% <sup>(2)</sup>                       |                              |
| No Load Power Consumption                        |          |                                                           | 127mW min. / 155mW typ. / 320mW max.     |                              |
| Isolation Voltage                                |          | (tested for 1 second)                                     | 1000VDC                                  |                              |
|                                                  |          | (rated for 1 minute**)                                    | 500VAC / 60Hz                            |                              |
| Isolation Voltage                                | H-Suffix | (tested for 1 second)                                     | 2000VDC                                  |                              |
|                                                  | H-Suffix | (rated for 1 minute**)                                    | 1000VAC / 60Hz                           |                              |
| Isolation Capacitance                            |          |                                                           | 25pF min. / 75pF max.                    |                              |
| Isolation Resistance                             |          |                                                           | 10 GΩ min.                               |                              |
| Short Circuit Protection                         |          |                                                           | 1 Second                                 |                              |
| P-Suffix                                         |          |                                                           | Continuous                               |                              |
| Operating Temperature Range (natural convection) |          |                                                           | -40°C to +85°C (see Graph)               |                              |
| Storage Temperature Range                        |          |                                                           | -55°C to +125°C                          |                              |
| Reflow Temperature                               |          | ROHS compliant                                            | 245°C (30 sec) max.                      |                              |
| Vapor Phase Process                              |          |                                                           | 230°C (90 sec) max.                      |                              |
|                                                  |          |                                                           | (for more details see Application Notes) |                              |
| Relative Humidity                                |          |                                                           | 95% RH                                   |                              |
| Package Weight                                   |          |                                                           | 1.2g                                     |                              |
| Packing Quantity                                 |          |                                                           | 33 pcs per tube                          |                              |
|                                                  |          |                                                           | 500 pcs per Reel'                        |                              |
| MTBF (+25°C)                                     |          | Detailed Information see Application Notes chapter "MTBF" | using MIL-HDBK 217F                      | 3947 x 10 <sup>3</sup> hours |
| (+85°C)                                          |          |                                                           | using MIL-HDBK 217F                      | 841 x 10 <sup>3</sup> hours  |

continued on next page

## ECONOLINE

## DC/DC-Converter

with 3 year Warranty

RECOM


## 0.5 Watt SMD Isolated Single Output



**EN-60950-1 Certified**  
**EN-60601-1 Certified\***  
**UL-60950-1 Certified**  
**(\* / H suffix)**

# R0.5Z

## Derating-Graph (Ambient Temperature)

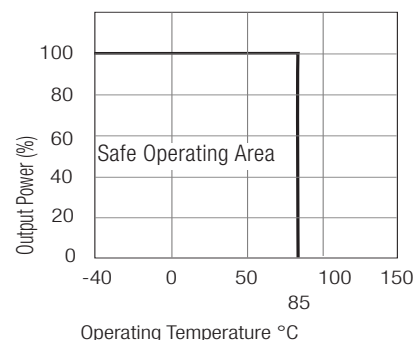

\*\*Any data referred to in this datasheet are of indicative nature and based on our practical experience only. For further details, please refer to our Application Notes.

**Refer to Application Notes**

### Specifications (Core Operating Area)


|                                |                                           |                            |
|--------------------------------|-------------------------------------------|----------------------------|
| Conducted / Radiated Emissions | EN55022                                   | Level A                    |
| Certifications                 |                                           |                            |
| EN General Safety              | Report-No.: SPCLVD1211033-3               | EN60950-1:2006 + A12:2011  |
| EN Medical Safety              | Report: MDD1205098-2 + RM1205098-2        | IEC/EN 60601-1 3rd Edition |
|                                | Medical Report + ISO14971 Risk Assessment |                            |
| UL General Safety              | Report-No.: E358085                       | UL60950-1, 2nd Edition     |

### Notes


- Note 1: Maximum capacitive load is defined as the capacitive load that will allow start up in under 1 second without damage to the converter
- Note 2: The R0.5Z series requires a minimum of 10% load on the output to maintain specified regulation. Operating under no-load conditions will not damage these devices; however, they may not meet all listed specifications.

### Typical Characteristics


#### R0.5Z-xx05

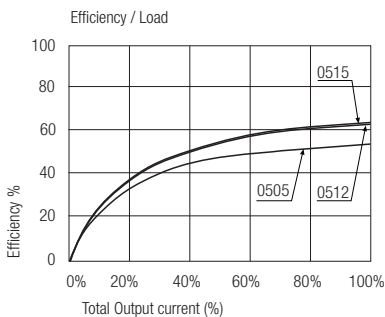

#### R0.5Z-xx12

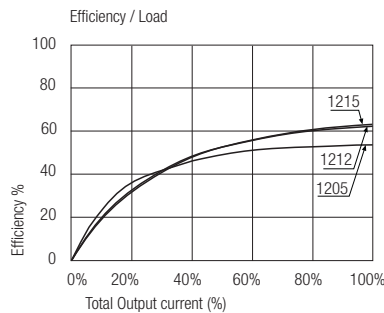


#### R0.5Z-xx15

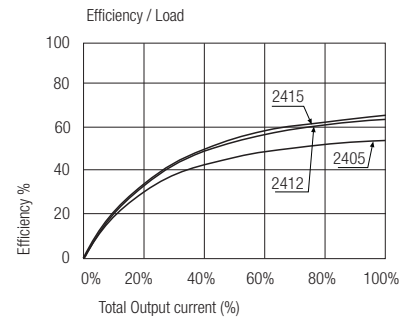

### Package Style and Pinning (mm)

#### 10 PIN Single SMD Package

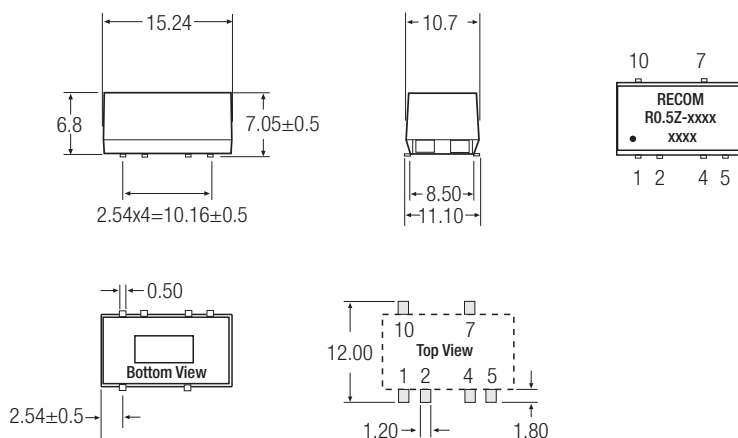

#### Recommended Footprint Details

#### Pin Connections

| Pin # | Function |
|-------|----------|
| 1     | -Vin     |
| 2     | +Vin     |
| 4     | -Vout    |
| 5     | -Vout    |
| 7     | +Vout    |
| 10    | NC       |

NC= No Connection

XX.X ± 0.5 mm  
XX.XX ± 0.25 mm



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.