MAX4434–MAX4437

Single-Supply, 150MHz, 16-Bit Accurate, Ultra-Low Distortion Op Amps

General Description

The MAX4434/MAX4435 single and MAX4436/MAX4437 dual operational amplifiers feature wide bandwidth, 16-bit settling time in 23ns, and low-noise/low-distortion operation. The MAX4434/MAX4436 are compensated for unity-gain stability and have a small-signal -3dB bandwidth of 150MHz. The MAX4435/MAX4437 are compensated for closed-loop gains of +5 or greater and have a small-signal, -3dB bandwidth of 150MHz.

The MAX4434–MAX4437 op amps require only 15mA of supply current per amplifier while achieving 115dB open-loop gain. Voltage noise density is a low 2.2nV/√Hz and provides 97dB spurious-free dynamic range (SFDR) at 1MHz. These characteristics make these op amps ideal for driving modern, high-speed 14- and 16-bit analog-to-digital converters (ADCs).

These high-speed op amps feature wide-output voltage swings and a high-current output drive up to 65mA. Using a voltage feedback architecture, the MAX4434–MAX4437 meet the requirements of many applications that previously depended on current feedback amplifiers.

The MAX4434/MAX4435 are available in space-saving 5-pin SOT23 packages and the MAX4436/MAX4437 are available in 8-pin µMAX® packages.

Applications

- High-Speed 14- and 16-Bit ADC Preamplifiers
- Low-Noise Preamplifiers
- IF/RF Amplifiers
- Low-Distortion Active Filters
- High-Performance Receivers
- Precision Instrumentation

µMAX is a registered trademark of Maxim Integrated Products, Inc.

Pin Configurations

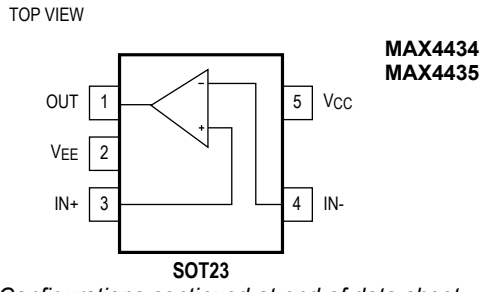

SOT23

Pin Configurations continued at end of data sheet.

Features

- 16-Bit Accurate Settling in 23ns (MAX4435/MAX4437)
- 97dB SFDR at 1MHz, $4V_{P-P}$ Output
- 2.2nV/√Hz Input Voltage-Noise Density
- 100dB (min) Open-Loop Gain
- 388V/µs Slew Rate (MAX4435/MAX4437)
- 65mA High Output Drive
- Available in Space-Saving Packages
  - 5-Pin SOT23 (MAX4434/MAX4435)
  - 8-Pin µMAX (MAX4436/MAX4437)

Ordering Information

PART	TEMP RANGE	PIN-PACKAGE
MAX4434EUK-T	-40°C to +85°C	5 SOT23
MAX4434ESA	-40°C to +85°C	8 SO
MAX4435EUK-T	-40°C to +85°C	5 SOT23
MAX4435ESA	-40°C to +85°C	8 SO
MAX4436EUA	-40°C to +85°C	8 µMAX
MAX4436ESA	-40°C to +85°C	8 SO
MAX4437EUA	-40°C to +85°C	8 µMAX
MAX4437ESA	-40°C to +85°C	8 SO

+Denotes lead(Pb)-free/RoHS-compliant package.
-Denotes a package containing lead(Pb).

Selector Guide appears at end of data sheet.

Typical Operating Circuit

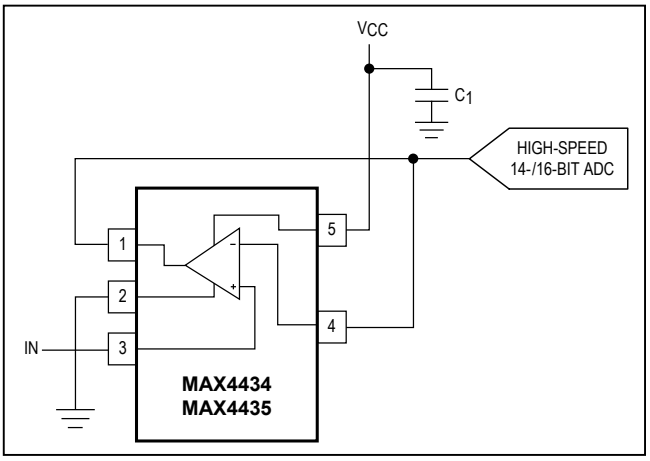

maxim integrated™

Absolute Maximum Ratings

Supply Voltage (V_{CC} - V_{EE}) ..... +6V
Differential Input Voltage ..... +2V
Input Voltage Range ..... (V_{CC} + 0.3V) to (V_{EE} - 0.3V)
Current into Any Input Pin ..... ±25mA
Output Short-Circuit Duration to V_{CC} or V_{EE} ..... (Note 1)
Continuous Power Dissipation (T_A = +70°C)
5-Pin SOT23 (derate 7.1mW/°C above +70°C) 571mW
8-Pin SO (derate 5.88mW/°C above +70°C) 471mW
8-Pin µMAX (derate 4.5mW/°C above +70°C) 330mW
Operating Temperature Range ..... -40°C to +85°C
Junction Temperature ..... +150°C
Storage Temperature Range ..... -65°C to +150°C
Lead Temperature (soldering, 10s) ..... +300°C

Note 1: The MAX4434–MAX4437 are not protected for output short-circuit conditions.

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

DC Electrical Characteristics

(V_{CC} = +5V, V_{EE} = 0V, R_L = ∞ to $V_{CC}/2$, T_A = T_{MIN} to T_{MAX}, unless otherwise noted. Typical values are at T_A = +25°C.) (Note 2)

PARAMETER	SYMBOL	CONDITIONS		MIN	TYP	MAX	UNITS
Input Common-Mode Voltage Range	V_{CM}	Guaranteed by CMRR test		V_{EE}		V_{CC} - 1	V
Input Offset Voltage	V_{OS}				1		mV
Input Offset Voltage Temperature Coefficient	TCV_{OS}				4		µV/°C
Input Offset Voltage Matching		MAX4436/MAX4437			0.25		mV
Input Bias Current	I_B				14	22	µA
Input Offset Current	I_{OS}				1	5	µA
Input Resistance	R_{IN}	Differential Mode -10mV ≤ V_{IN} ≤ +10mV			1		kΩ
		Common Mode 0 ≤ V_{CM} ≤ (V_{CC} - 1V)			1.7		MΩ
Common-Mode Rejection Ratio	CMRR	V_{EE} ≤ V_{CM} ≤ (V_{CC} - 1V)		75	100		dB
Open-Loop Gain	A_{VOL}	(V_{EE} + 0.25) ≤ V_{OUT} ≤ (V_{CC} -0.25), R_L = 10kΩ		100	115		dB
		(V_{EE} + 0.5) ≤ V_{OUT} ≤ (V_{CC} -0.5), R_L = 500Ω		96	110		
Output Voltage Swing	V_{OUT}	R_L = 10kΩ	V_{CC} - V_{OH}		65	200	mV
			V_{OL} - V_{EE}		15	70	
Output Current	I_{OUT}	R_L = 20Ω to Ground	Sinking	40	65		mA
			Sourcing	35	60		
Output Short-Circuit Current	I_{SC}	Sinking or sourcing			±70		mA
DC Power-Supply Rejection Ratio	PSRR	V_{CC} = +4.5V to +5.5V		85	110		dB
Operating Supply Voltage	V_S	Guaranteed by PSRR test		+4.5		+5.5	V
Quiescent Supply Current (Per Amplifier)	I_S				15	18	mA

Note 2: All devices are 100% production tested at +25°C. Specifications over temperature limits are guaranteed by design.

AC Electrical Characteristics

(V_{CC} = +5V, V_{EE} = 0V, V_{CM} = V_{CC}/2, R_L = 500Ω, A_{VCL} = +1, and T_A = +25°C, unless otherwise noted.)

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
Small-Signal -3dB Bandwidth	BW_{SS}	V_{OUT} = 20mVp-p MAX4434/MAX4436		150		MHz
		V_{OUT} = 20mVp-p MAX4435/MAX4437 (A_{VCL} = +5)		150		
Large-Signal -3dB Bandwidth	BW_{LS}	V_{OUT} = 2Vp-p MAX4434/MAX4436		28		MHz
		V_{OUT} = 4Vp-p MAX4435/MAX4437 (A_{VCL} = +5)		25		
Small-Signal 0.1dB Gain Flatness	$BW_{0.1dBSS}$	V_{OUT} = 20mVp-p MAX4434/MAX4436		80		MHz
		V_{OUT} = 20mVp-p MAX4435/MAX4437 (A_{VCL} = +5)		80		
Large-Signal 0.1dB Gain Flatness	$BW_{0.1dBLS}$	V_{OUT} = 2Vp-p MAX4434/MAX4436		15		MHz
		V_{OUT} = 4Vp-p MAX4435/MAX4437 (A_{VCL} = +5)		20		
Slew Rate	SR	V_{OUT} = 2V step MAX4434/MAX4436		133		V/µs
		V_{OUT} = 4V step MAX4435/MAX4437 (A_{VCL} = +5)		388		
Rise/Fall Time	t_R, t_F	V_{OUT} = 2V step MAX4434/MAX4436		17		ns
		V_{OUT} = 4V step MAX4435/MAX4437 (A_{VCL} = +5)		10		
Settling Time to 16-Bit (0.0015%)	$t_{S0.0015\%}$	V_{OUT} = 1.5V to 3.5V step MAX4434/MAX4436		35		ns
		V_{OUT} = 1.5V to 3.5V step MAX4435/MAX4437 (A_{VCL} = +5)		23		
		V_{OUT} = 1V to 4V step MAX4434/MAX4436		42		
Output “Glitch” Settling to 16-Bit (0.0015%)		5pF load, C_L charged from 1V to 4V		41		ns
Output Overload Recovery Time		50% overdrive, settling to 10% accuracy		100		ns
AC Common-Mode Rejection Ratio	CMRR	f_C = 100kHz		-92		dB

AC Electrical Characteristics (continued)

(V_{CC} = +5V, V_{EE} = 0V, V_{CM} = V_{CC}/2, R_L = 500Ω, A_{VCL} = +1, and T_A = +25°C, unless otherwise noted.)

PARAMETER	SYMBOL	CONDITIONS		MIN	TYP	MAX	UNITS
AC Power-Supply Rejection Ratio	PSRR	f_C = 100kHz			-101		dB
Spurious-Free Dynamic Range	SFDR	V_{OUT} = $2V_{p-p}$ centered at V_{CC}/2	f_C = 100kHz		-97		dBc
			f_C = 1MHz		-98		
		V_{OUT} = $3V_{p-p}$ centered at V_{CC}/2	f_C = 100kHz		-130		
			f_C = 1MHz		-99		
		V_{OUT} = $4V_{p-p}$ centered at V_{CC}/2	f_C = 100kHz		-112		
			f_C = 1MHz		-97		
Input Noise Voltage Density	e_n	f_C = 100kHz			2.2		$nV/\sqrt{Hz}$
Input Noise Current Density	i_n	f_C = 100kHz			2.0		$pA/\sqrt{Hz}$
Input Capacitance	C_{IN}				2.3		pF
Maximum Capacitive Load Without Sustained Oscillations					30		pF
Output Impedance	Z_{OUT}	f_C = 1MHz			0.05		Ω
Crosstalk		f_C = 1MHz, MAX4436/MAX4437			-80		dB

Typical Operating Characteristics

(V_{CC} = +5V, V_{EE} = 0V, R_L = 500Ω, C_L = 0, T_A = +25°C, unless otherwise noted.)

MAX4434/MAX4436 SMALL-SIGNAL GAIN vs. FREQUENCY (A_{VCL} = +1V/V)

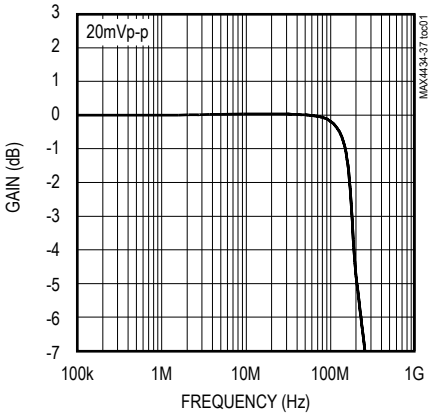

MAX4435/MAX4437 SMALL-SIGNAL GAIN vs. FREQUENCY (A_{VCL} = +5V/V)

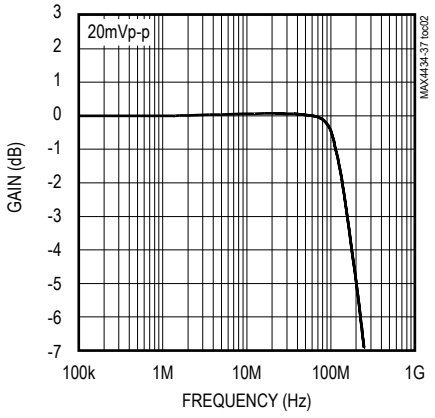

MAX4434/MAX4436 GAIN FLATNESS vs. FREQUENCY (A_{VCL} = +1V/V)

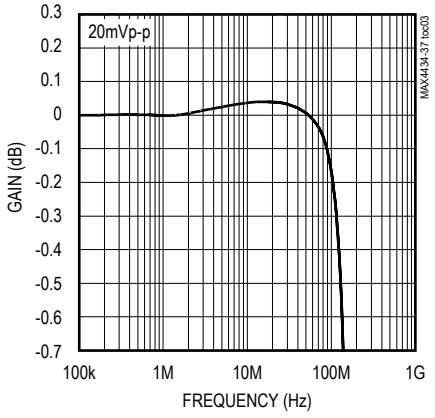

Typical Operating Characteristics (continued)

(V_{CC} = +5V, V_{EE} = 0V, R_L = 500Ω, C_L = 0, T_A = +25°C, unless otherwise noted.)

MAX4434/MAX4436 GAIN FLATNESS vs. FREQUENCY (A_{VCL} = +1V/V)

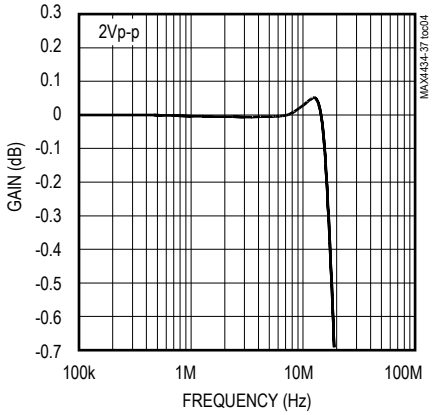

MAX4435/MAX4437 GAIN FLATNESS vs. FREQUENCY (A_{VCL} = +5V/V)

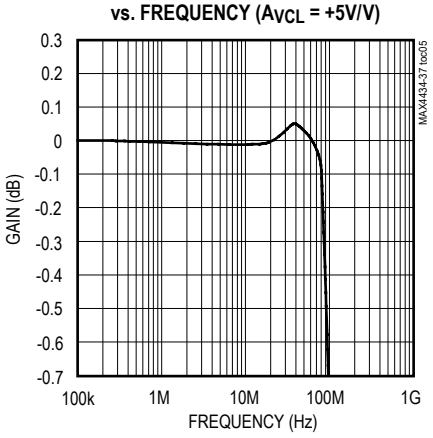

MAX4435/MAX4437 GAIN FLATNESS vs. FREQUENCY (A_{VCL} = +5V/V)

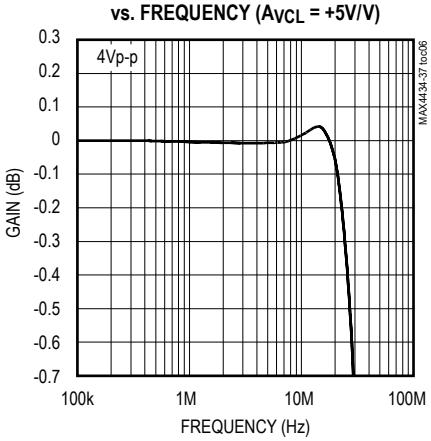

MAX4434/MAX4436 LARGE-SIGNAL GAIN vs. FREQUENCY (A_{VCL} = +1V/V)

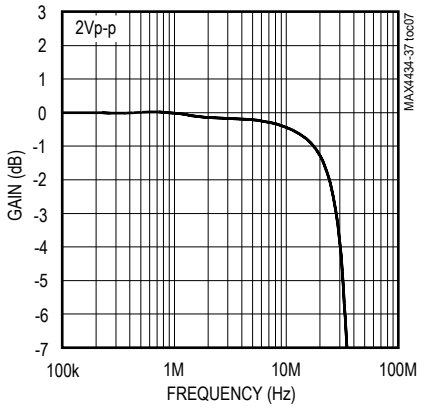

MAX4435/MAX4437 LARGE-SIGNAL GAIN vs. FREQUENCY (A_{VCL} = +5V/V)

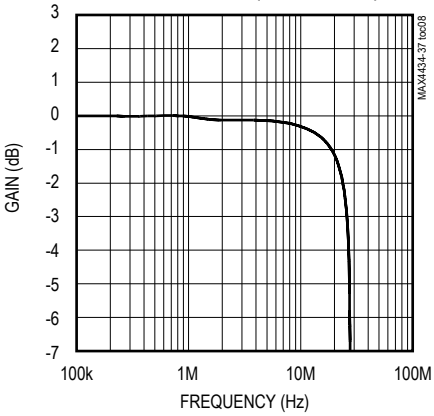

MAX4434/MAX4436 SMALL-SIGNAL PULSE RESPONSE

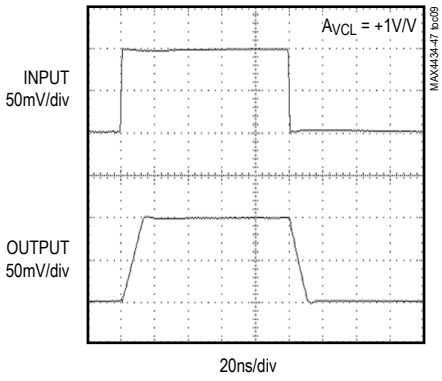

MAX4435/MAX4437 SMALL-SIGNAL PULSE RESPONSE

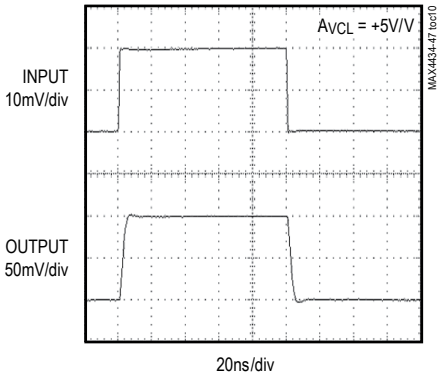

MAX4434/MAX4436 LARGE-SIGNAL PULSE RESPONSE

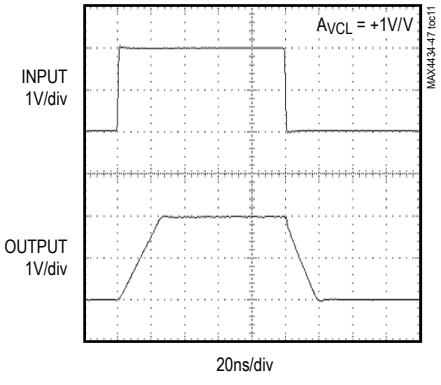

MAX4435/MAX4437 LARGE-SIGNAL PULSE RESPONSE

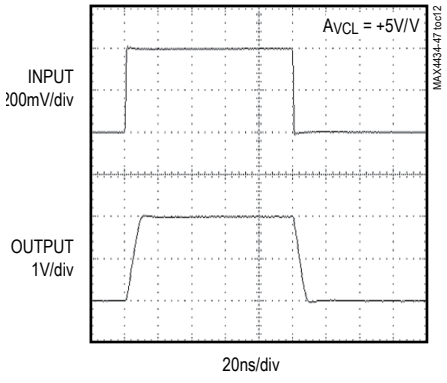

Typical Operating Characteristics (continued)

(V_{CC} = +5V, V_{EE} = 0V, R_L = 500Ω, C_L = 0, T_A = +25°C, unless otherwise noted.)

MAX4434/MAX4436 SMALL-SIGNAL PULSE RESPONSE

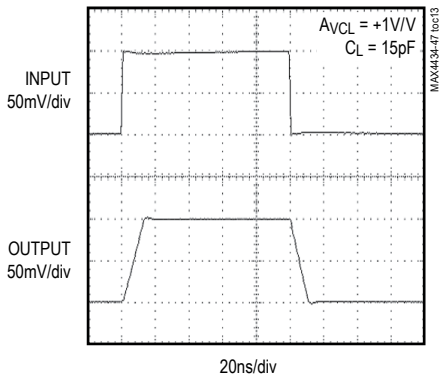

MAX4435/MAX4437 SMALL-SIGNAL PULSE RESPONSE

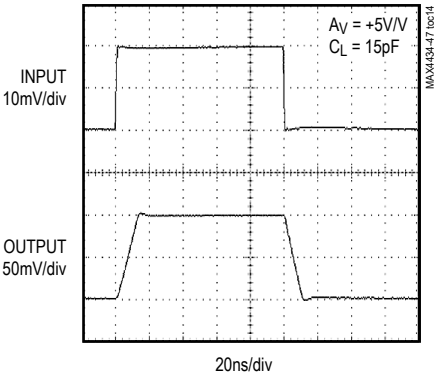

MAX4434/MAX4436 LARGE-SIGNAL PULSE RESPONSE

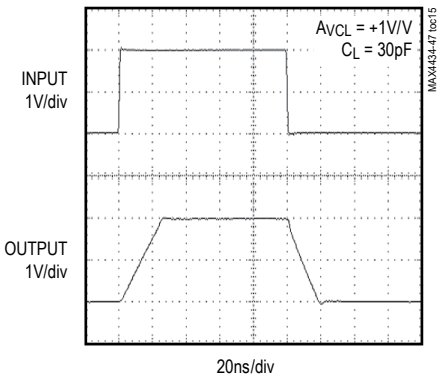

MAX4435/MAX4437 LARGE-SIGNAL PULSE RESPONSE

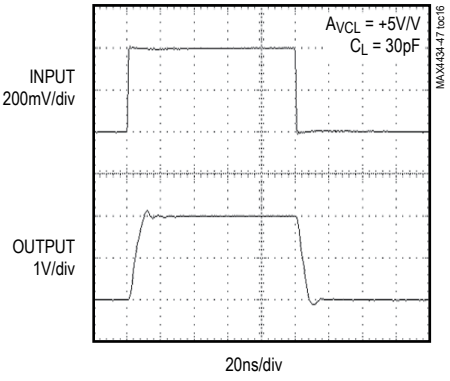

POWER-SUPPLY REJECTION RATIO vs. FREQUENCY

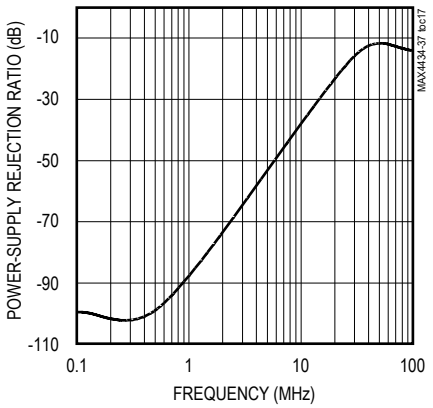

COMMON-MODE REJECTION RATIO vs. FREQUENCY

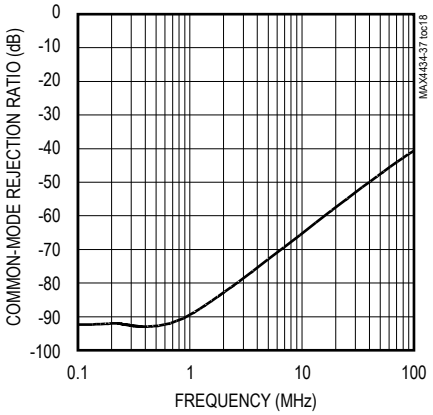

OUTPUT ISOLATION RESISTANCE vs. CAPACITIVE LOAD

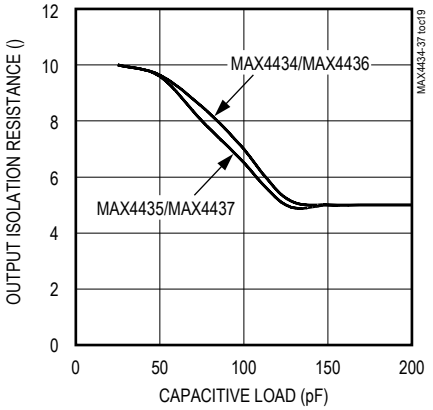

CLOSED-LOOP OUTPUT IMPEDANCE vs. FREQUENCY

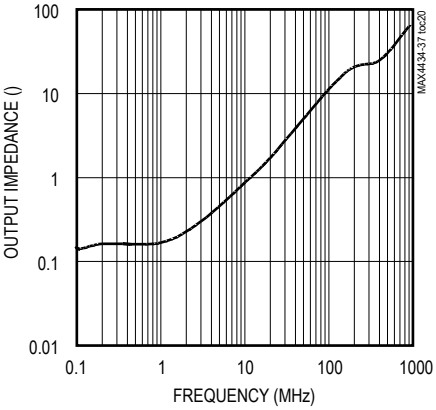

GAIN AND PHASE vs. FREQUENCY

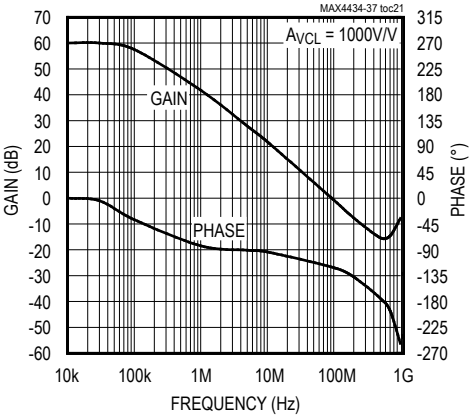

Typical Operating Characteristics (continued)

(V_{CC} = +5V, V_{EE} = 0V, R_L = 500Ω, C_L = 0, T_A = +25°C, unless otherwise noted.)

HARMONIC DISTORTION vs. FREQUENCY

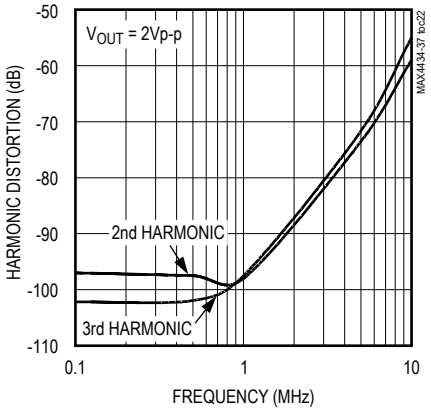

HARMONIC DISTORTION vs. OUTPUT SWING

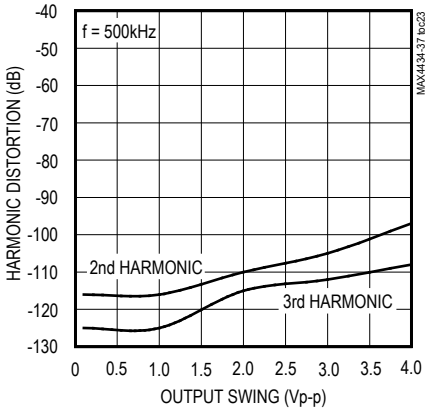

HARMONIC DISTORTION vs. RESISTIVE LOAD

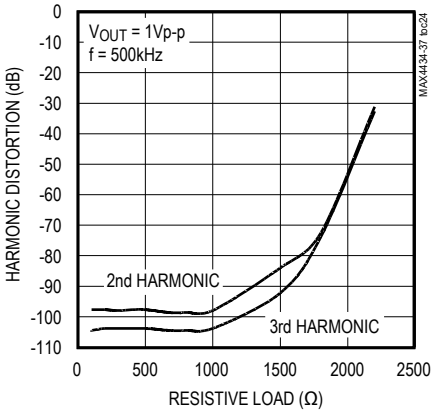

INPUT VOLTAGE NOISE vs. FREQUENCY

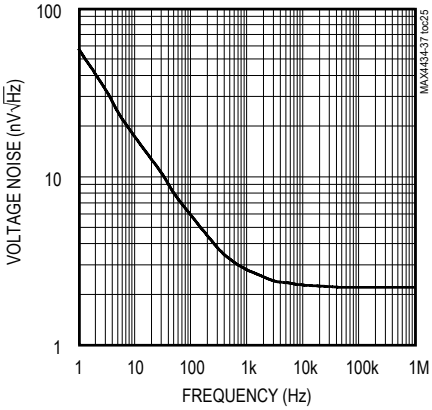

INPUT CURRENT NOISE DENSITY vs. FREQUENCY

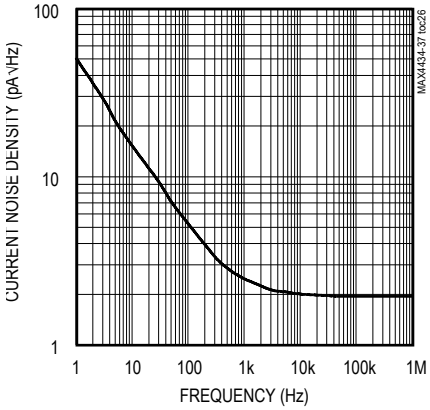

MAX4436/MAX4437 CROSSTALK vs. FREQUENCY

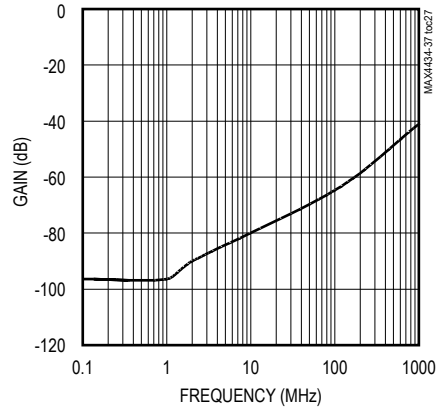

QUIESCENT CURRENT PER AMPLIFIER vs. TEMPERATURE

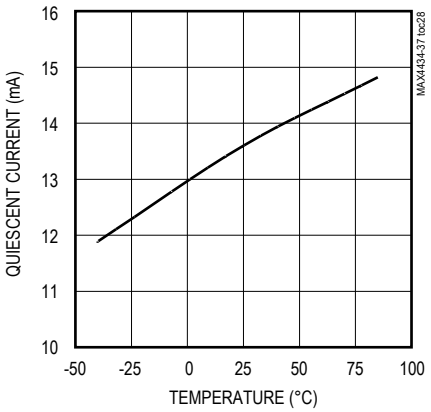

BIAS CURRENT vs. TEMPERATURE

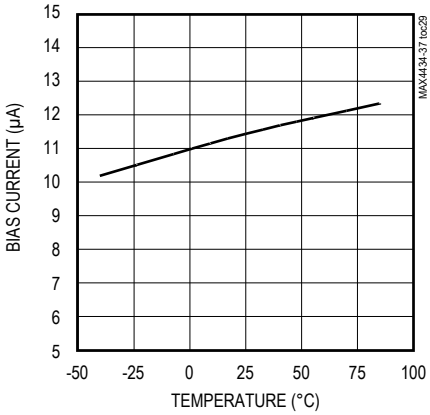

OFFSET VOLTAGE vs. TEMPERATURE

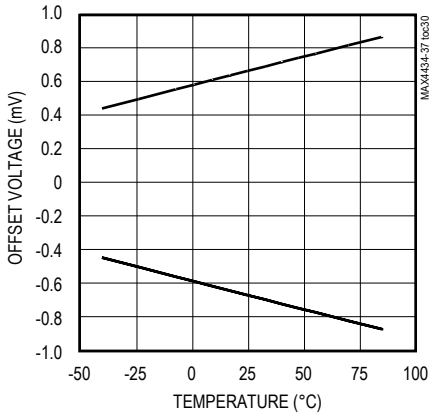

Typical Operating Characteristics (continued)

(V_{CC} = +5V, V_{EE} = 0V, R_L = 500Ω, C_L = 0, T_A = +25°C, unless otherwise noted.)

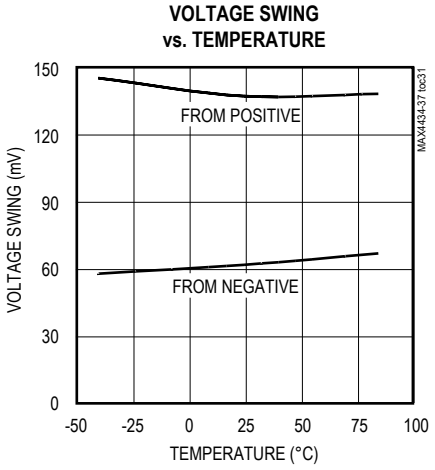

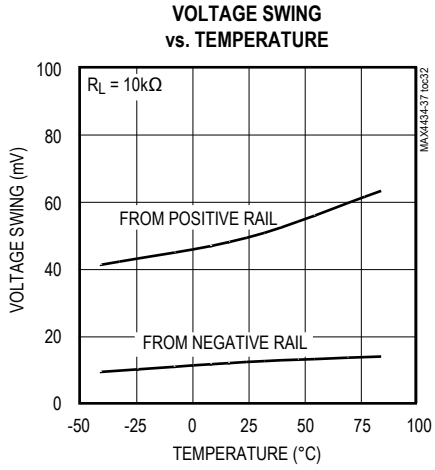

Pin Description

PIN		NAME	FUNCTION
MAX4434/MAX4435			
SOT23	SO		
1	6	OUT	Output
2	4	V_{EE}	Ground
3	3	IN+	Noninverting Input
4	2	IN-	Inverting Input
5	7	V_{CC}	Positive Power Supply
—	1, 5, 8	N.C.	No Connection. Not internally connected.

PIN	NAME	FUNCTION
MAX4436/MAX4437		
SO/µMAX		
1	OUTA	Amplifier A Output
2	INA-	Amplifier A Inverting Input
3	INA+	Amplifier A Noninverting Input
4	V_{EE}	Ground
5	INB+	Amplifier A Noninverting Input
6	INB-	Amplifier A Inverting Input
7	OUTB	Amplifier A Output
8	V_{CC}	Positive Power Supply

Detailed Description

The MAX4434–MAX4437 are wide-bandwidth, ultra-low -distortion, voltage-feedback amplifiers. The MAX4434/MAX4436 are internally compensated for unity gain. The MAX4435/MAX4437 are internally compensated for gains of +5V/V or greater.

These amplifiers have ultra-fast 35ns (MAX4434/MAX4436) 16-bit settling times, -97dB SFDR at 1MHz, and 4Vp-p output swing with minimum 115dB open-loop gain.

High-Speed ADC Input Driver Application

The MAX4434–MAX4437 op amps are ideal for drivinghigh-speed 14- to 16-bit ADCs. In most cases, these ADCs operate with a charge balance scheme, with capacitive loads internally switched on and off from the input. The driver used must withstand these changing capacitive loads while holding the signal amplitude stability consistent with the ADC's resolution and, at the same time, have a frequency response compatible with the sampling speed of the ADC (Figure 1).

Inverting and Noninverting Configurations

The circuits typically used for the inverting and noninverting configurations of the MAX4434–MAX4437 are shown in Figure 2a and Figure 2b. The minimum unconditionally stable gain values are 1 for the MAX4434/MAX4436 and 5 for the MAX4435/MAX4437. Use care in selecting the value for the resistor marked R_S in both circuits. From dynamic stability considerations (based on the part's frequency response and the input capacitance of the MAX4434–MAX4437), the maximum recommended value for R_S is 500Ω. In general, lower R_S values will yield a higher bandwidth and better dynamic stability, at the cost of higher power consumption, higher power dissipation in the IC, and reduced output drive availability For a minimum R_S value, take into consideration that the current indicated as I_F is supplied by the output stage and must be discounted from the maximum output current to calculate the maximum current available to the load. I_F can be found using the following equation:

$$I_F = V_{IN(MAX)}/R_S$$

If DC thermal stability is an important design concern, the Thevenin resistance seen by both inputs at DC must be balanced. This includes the resistance of the signal source and termination resistors if the amplifier signal input is fed from a transmission line. The capacitance associated with the feedback resistors must also be considered as a possible limitation to the available bandwidth or to the dynamic stability. Only resistors with small parallel capacitance specifications should be considered.

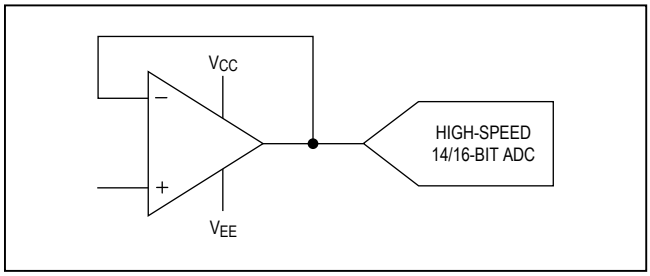

Figure 1. Typical Application Circuit

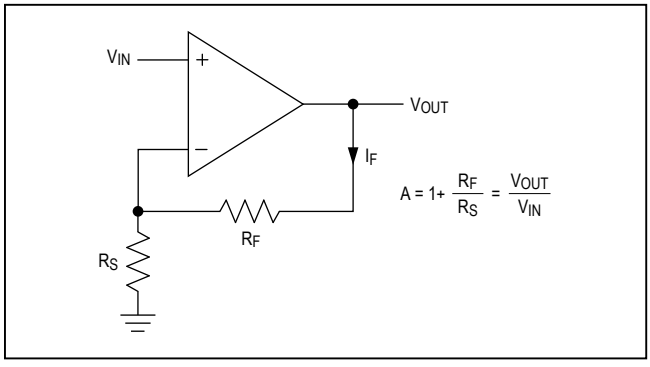

Figure 2a. Noninverting Configuration

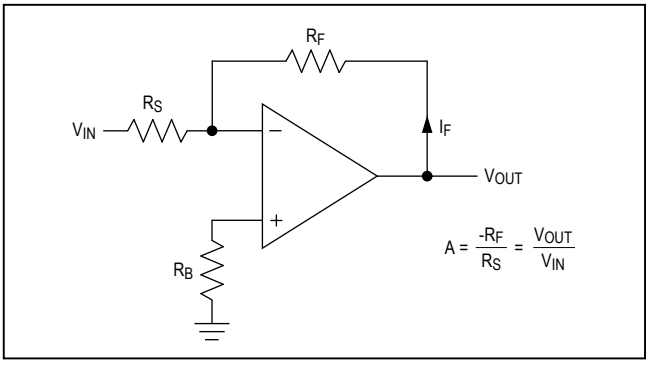

Figure 2b. Inverting Configuration

Applications Information

Layout and Power-Supply Bypassing

The MAX4434–MAX4437 have wide bandwidth and consequently require careful board layout. To realize the full AC performance of these high-speed amplifiers, pay careful attention to power-supply bypassing and board layout. The PC board should have a large low-impedance ground plane that is as free of voids as possible. Do not use commercial breadboards. Keep signal lines as short and straight as possible. Observe high-frequency bypass-

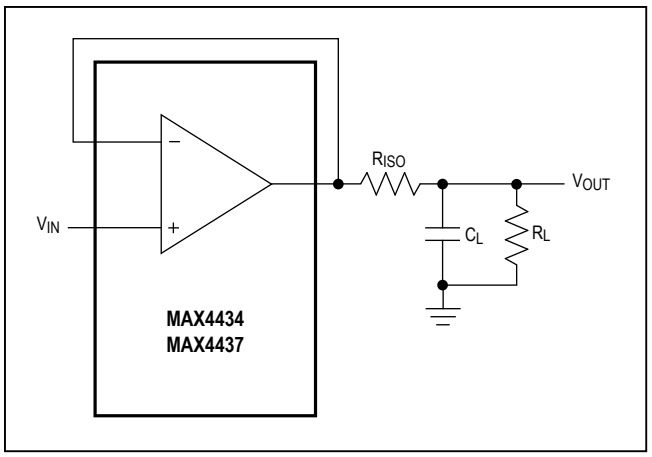

Figure 3. Capacitive-Load Driving Circuit

ing techniques to maintain the amplifier's accuracy and stability. In general, use sur-face-mount components since they have shorter bodies and lower parasitic reactance. This will result in improved performance over through-hole components. The bypass capacitors should include 1nF and/or 0.1µF surface-mount ceramic capacitors between V_{CC} and the ground plane, located as close to the package as possible. Place a 10µF tantalum capacitor at the power supply's point of entry to the PC board to ensure the integrity of the incoming supplies. Input termination resistors and output back-termination resistors, if used, should be surface-mount types and should be placed as close to the IC pins as possible.

Driving Capacitive Loads

The MAX4434–MAX4437 can drive capacitive loads. However, excessive capacitive loads may cause ringing or instability at the output as phase margin is reduced. Adding a small isolation resistor in series with the output capacitive load helps reduce the ringing but slightly increases gain error (see *Typical Operating Characteristics* and Figure 3).

Selector Guide

PART	AMPS	MIN GAIN STABLE (V/V)	BW (MHz)	SETTLING TIME TO 0.0015% (ns)
MAX4434	1	+1	150	35
MAX4435	1	+5	150	23
MAX4436	2	+1	150	35
MAX4437	2	+5	150	23

Pin Configurations (continued)

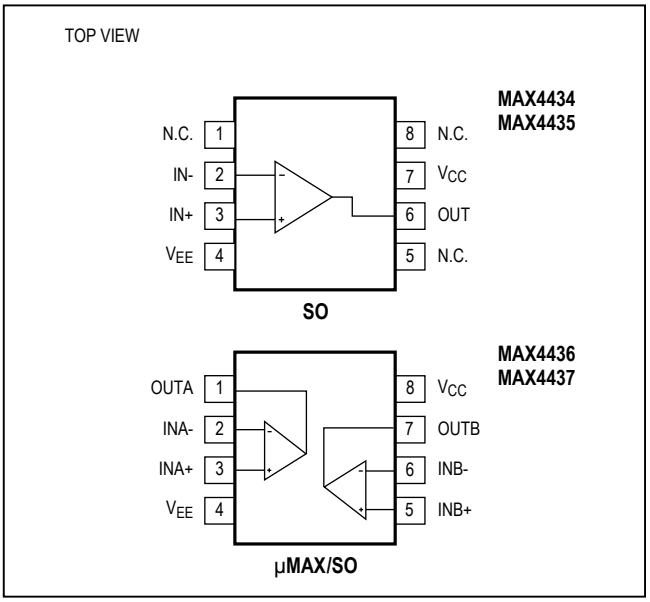

Chip Information

MAX4434/MAX4435 TRANSISTOR COUNT: 141

MAX4436/MAX4437 TRANSISTOR COUNT: 318

Package Information

For the latest package outline information and land patterns (footprints), go to **www.maximintegrated.com/packages**. Note that a "+", "#", or "-" in the package code indicates RoHS status only. Package drawings may show a different suffix character, but the drawing pertains to the package regardless of RoHS status.

PACKAGE TYPE	PACKAGE CODE	DOCUMENT NO.	LAND PATTERN NO.
5 SOT23	U5-1	**21-0057**	**90-0174**
8 SO	S8-2	**21-0041**	**90-0096**
8 µMAX	U8-1	**21-0036**	**90-0092**

Revision History

REVISION NUMBER	REVISION DATE	DESCRIPTION	PAGES CHANGED
0	10/01	Initial release	—
1	12/08	Added automotive part number	1
2	4/15	Removed automotive reference from data sheet	1

For pricing, delivery, and ordering information, please contact Maxim Direct at 1-888-629-4642, or visit Maxim Integrated's website at www.maximintegrated.com.

Maxim Integrated cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim Integrated product. No circuit patent licenses are implied. Maxim Integrated reserves the right to change the circuitry and specifications without notice at any time. The parametric values (min and max limits) shown in the Electrical Characteristics table are guaranteed. Other parametric values quoted in this data sheet are provided for guidance.

Maxim Integrated and the Maxim Integrated logo are trademarks of Maxim Integrated Products, Inc. © 2015 Maxim Integrated Products, Inc.

Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits,General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)
Факс: 8 (812) 320-02-42
Электронная почта: org@eplast1.ru
Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.