MODEL 589

STRATUM 3

TEMPERATURE COMPENSATED CRYSTAL OSCILLATOR

FEATURES

- **HCMOS Output**
- **Optional Voltage Control for Frequency Tuning [VCTCXO]**
- 7.0mm x 5.0mm Surface Mount Package
- Frequency Range 5 – 52 MHz
- Fundamental Crystal Design
- Operating Voltage, +3.0Vdc, +3.3Vdc or +5.0Vdc
- Overall Frequency Stability ±4.6ppm
- Operating Temperature to -40°C to +85°C
- Tape & Reel Packaging Standard, EIA-418
- **RoHS/Green Compliant [6/6]**

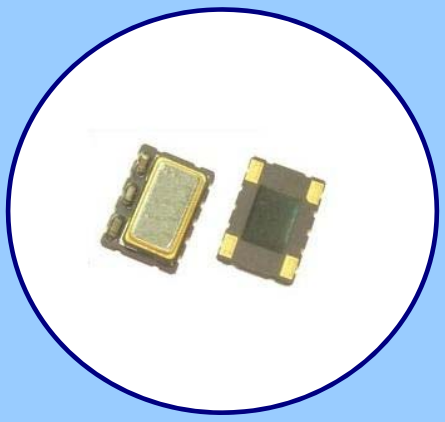

APPLICATIONS

The Model 589, a quartz based analog TCXO with HCMOS output and optional frequency tuning, is suitable for applications requiring Stratum 3 performance such as base stations, Microcells, Femtocells, 1588 and Synchronous Ethernet timing, wireless communications, test and measurement.

ORDERING INFORMATION

589 □ □ □ □ □ □ □ □ □

SUPPLY VOLTAGE

R = +3.0Vdc
L = +3.3Vdc
S = +5.0Vdc

FREQUENCY

Product Frequency Code [3 digits]

Refer to document 016-1454-0, Frequency Code Tables.

FREQUENCY STABILITY *

X1 = ±0.14ppm [1]
X2 = ±0.28ppm

PACKAGING OPTIONS

T - 1k pcs./reel

FREQUENCY TUNING [AFC]

T = No AFC [TCXO]
A = ±5ppm - ±8ppm [VCTCXO]

OPERATING TEMPERATURE RANGE

C = -20°C to +70°C
I = -40°C to +85°C

* Frequency vs. Temperature Only

1] Only available with temperature range code "C".

Not all performance combinations and frequencies may be available.
Contact your local CTS Representative or CTS Customer Service for availability.

ELECTRICAL CHARACTERISTICS

	PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNIT
ELECTRICAL PARAMETERS	Maximum Supply Voltage	V_{CC}	-	-0.6	-	6.0	V
	Maximum Control Voltage	V_C	-	-0.5	-	V_{CC}	V
	Storage Temperature	T_{STG}	-	-40	-	+100	°C
	Operating Temperature	T_A	-		+25		°C
	Order Code 'C'			-20		+70	
	Order Code 'I'			-40		+85	
	Frequency Range	f_O	-	5	-	52	MHz
	Supply Voltage	V_{CC}	±5%				V
	Order Code 'R'			2.85	3.0	3.15	
	Order Code 'L'			3.14	3.3	3.47	
	Order Code 'S'			4.75	5.0	5.25	
	Supply Current	I_{CC}		-	-	6.0	mA
	Frequency Stability						± ppm
	Overall Frequency Stability	$\Delta f/f_O$	Reference to f_O, Including 20 years aging	-	-	4.60	
	vs. Initial Calibration		@ +25°C, at time of shipment	-	-	1.00	
	vs. Operating Temperature	$\Delta f/f_{25}$	[Fmax. - Fmin.]/2, over -40°C to +85°C	-	-	0.28	
			[Fmax. - Fmin.]/2, over -20°C to +70°C	-	-	0.14	
	vs. Supply Voltage		±5% change @ +25°C	-	-	0.40	
	vs. Load		±5% change	-	-	0.10	
	vs. Aging		20 years @ +40°C	-	-	2.80	
	Holdover	$\Delta f/f_O$	[Fmax. - Fmin.]/2, over 24 hours	-	-	0.32	
	Control Voltage	V_C	-	0.5	1.5	2.5	V
	Frequency Tuning [VCTCXO Only]	-	V_C = 1.5V ±1.0V, monotonic positive		5 - 8		± ppm
	V_C Input Impedance	ZV_C	-	100	-	-	kOhm
	Output Waveform		HCMOS				
	Output Voltage Levels						V
	Logic '1' Level	V_{OH}	HCMOS Load	0.9*V_{CC}	-	-	
	Logic '0' Level	V_{OL}	HCMOS Load	-	-	0.1*V_{CC}	
	Output Load	C_L	-	-	-	15	pF
	Rise and Fall Time	T_R, T_F	@ 20% - 80% Levels	-	3.0	6.0	ns
	Output Duty Cycle	SYM	@ 50% Level	45	-	55	%
	Start Up Time	T_S	-	-	-	2	ms
	Enable Function						V
	Enable Input Voltage	V_{IH}	Pin 8 Logic '1', Output Enabled	0.7*V_{CC}	-	-	
	Disable Input Voltage	V_{IL}	Pin 8 Logic '0', Output Disabled [High Imp]	-	-	0.3*V_{CC}	
	Phase Noise [1]	-	-				dBc/Hz

Notes:

1. Phase Noise performance may vary based on output frequency. See example plot at 10 MHz below.

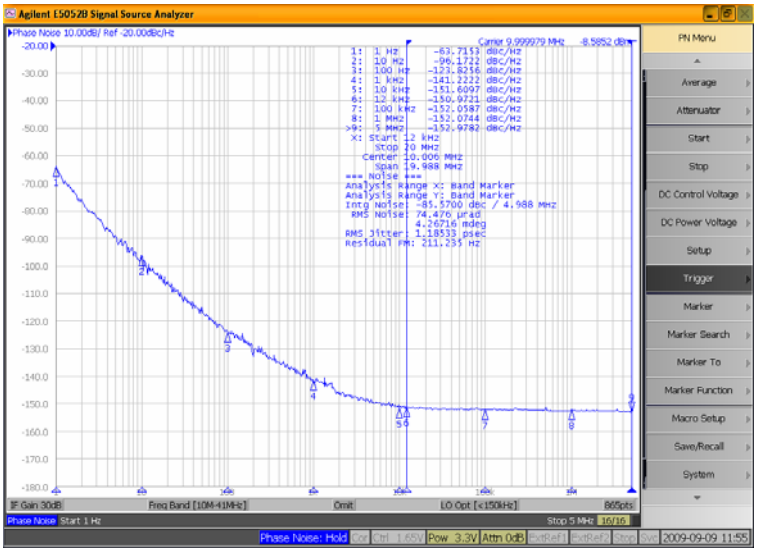

TEST CIRCUIT – HCMOS LOAD

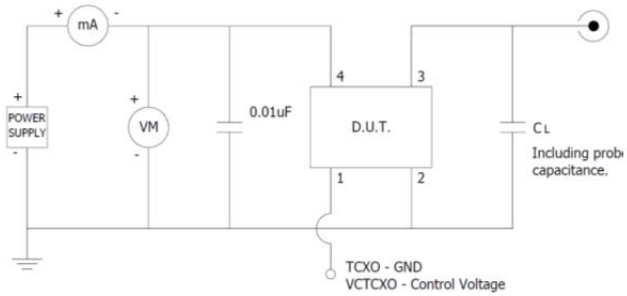

MECHANICAL SPECIFICATIONS

PACKAGE DRAWING

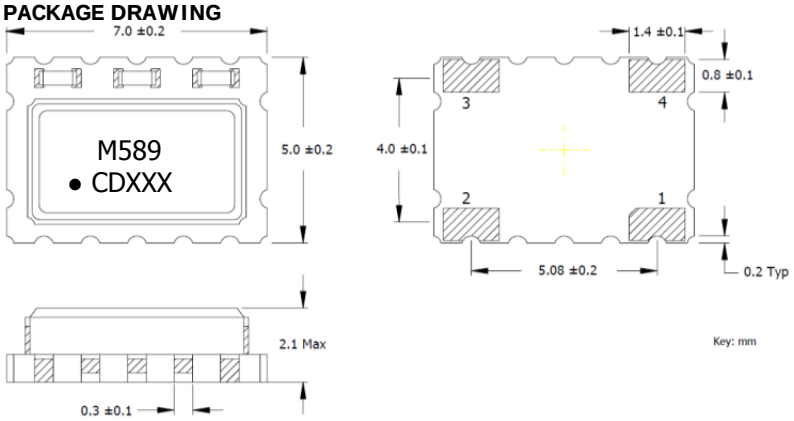

MARKING INFORMATION

1. M589 – CTS Model Series.
2. ● – Pin 1 identifier.
3. C – CTS identifier.
4. D – Date code. See Table II for codes.
6. xxx – Frequency Code.

Refer to document 016-1454-0, Frequency Code Tables.

NOTES

1. DO NOT make connections to non-labeled pins or castellations as they may have internal connections used in the manufacturing process.
2. Termination pads (e4); barrier plating is nickel [Ni] with gold [Au] flash plate.
3. Reflow conditions per JEDEC J-STD-020, 260°C maximum.
4. MSL = 1.

SUGGESTED SOLDER PAD GEOMETRY

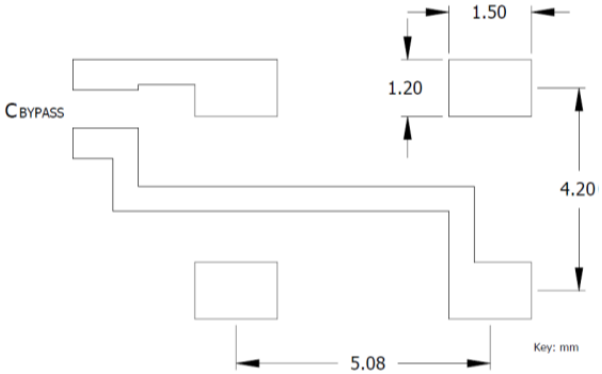

D.U.T. PIN ASSIGNMENTS

PIN	SYMBOL	DESCRIPTION
1	V_C	Control Voltage – VCTCXO [Note 1]
		GND - TCXO
2	GND	Circuit & Package Ground
3	Output	HCMOS Output
4	V_{CC}	Supply Voltage

NOTES

1. Connect to ground for TCXO [no AFC] option.

TABLE II – DATE CODE

YEAR \ MONTH	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	OCT	NOV	DEC
2001 2005 2009 2013 2017	A	B	C	D	E	F	G	H	J	K	L	M
2002 2006 2010 2014 2018	N	P	Q	R	S	T	U	V	W	X	Y	Z
2003 2007 2011 2015 2019	a	b	c	d	e	f	g	h	j	k	l	m
2004 2008 2012 2016 2020	n	p	q	r	s	t	u	v	w	x	y	z

PACKAGING INFORMATION [reference]

Device quantity is 1k pcs. maximum per 180mm reel.

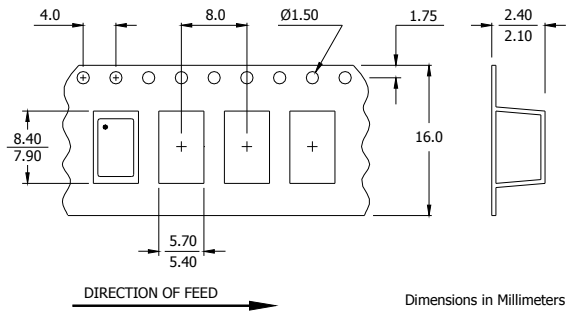

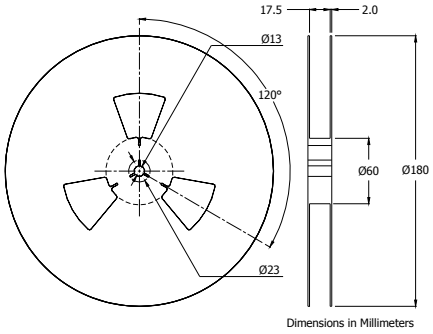

Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits,General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)
Факс: 8 (812) 320-02-42
Электронная почта: org@eplast1.ru
Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.