

PPC-L127T

12.1" Fanless Panel PC with Intel® Celeron® M Processor



Features

- 12.1" TFT SVGA LCD with optional resistive touchscreen
- Embedded Intel® ULV Celeron® M 1 GHz
- System memory up to 1 GB DDR
- Optional Smart Battery Module with UPS functionality
- Window® CE 6.0 and XPE available
- Removable front bezel
- Fanless and ultra-low power consumption
- Automatic data flow control over RS-485 (COM2)
- Supports GPIO function (optional)



Introduction


The PPC-L127T is a panel computer designed without a fan, which makes it an ideal solution for low noise operating environments and clean room applications. PPC-L127T has two power sources: an optional battery pack and an optional AC power supply. The battery charges when the PPC-L127T is connected to the AC power adapter. The optional rechargeable battery pack has more than 60 minutes battery life and can be used as a UPS during unexpected loss of power. The smart battery indicates state of charge and the percentage of remaining power. PPC-L127T's ultra-low power consumption saves energy and maximizes battery life. PPC-L127T meets the VESA standard for mounting holes so that it can be used in many different kinds of installations. The front bezel can be removed to make maintenance of the LCD and touchscreen easier and quicker. The support for one CompactFlash disk also makes system maintenance more convenient.

Specifications

Processor System	CPU	Embedded Intel ULV Celeron M 1.0 GHz
	Secondary Cache	None
	Memory	1 x 184-pin DIMM sockets, supporting DDR200/266 modules for up to 1 GB
	Combo Drive	Optional 989KL12710E
	SSD	1 x type II CompactFlash socket, built-in 128 MB CF card in PPC-L127T-CE-RTE.
	HDD	1 x internal IDE interface, 2.5" type
	Network (LAN)	10/100 Mbps Ethernet
	Fully Integrated I/O and Speakers	- 4 x serial ports: RS-232 x 3, RS-232/422/485 x 1 - 1 x parallel port - 6 x USB ports (4 x external, 2 x internal) - 1 x PS/2 mouse and keyboard - Mic-in, Line-in, Line-out - 1 x VGA port - 2 x 1.3 W speakers - 8-bit GPIO through COM3 (Optional)
	Bus Expansion	1 x expansion slot for PCI/ISA card 1 x MINI PCI expansion slot
	Front Panel Protection	IP65/NEMA 4 compliant
Weight	3.25 kg (7.151 lb)	
Dimensions (W x H x D)	340.5 x 269.3 x 70.5 mm (13.41" x 10.6" x 2.78")	
OS Support	Microsoft Windows XPE, CE, XP pro, 2000	
Supply	Input Voltage	12-25 V DC, 4.5 A max; 15-25 V DC with Battery Pack
LCD Display	Display Type	12.1" TFT LCD
	Max. Resolution	800 x 600, Optional 1024 x 768
	Colors	262 K
	Dot Size (mm)	0.3075 x 0.3075
	Viewing Angle	70° (left), 70° (right), 60° (up), 50° (down)
	Luminance	400 cd/m ²
	Operating Temperature	-30 - 85° C
	Brightness Control	Yes
Touchscreen (Optional)	Backlight Lifetime	50,000 hours (min)
	Type	Analog Resistive (5 wires) (Resistive with Sunlight Readable as an option))
	Resolution	Continuous
	Light Transmission	80%
	Controller	USB interface
	Power Consumption	< 5 V @ 60 mA
Software Driver	Supports Windows NT/98/2000/ME/XP	
Durability (Touches)	35 million	

Dimensions

Unit: mm (inch)

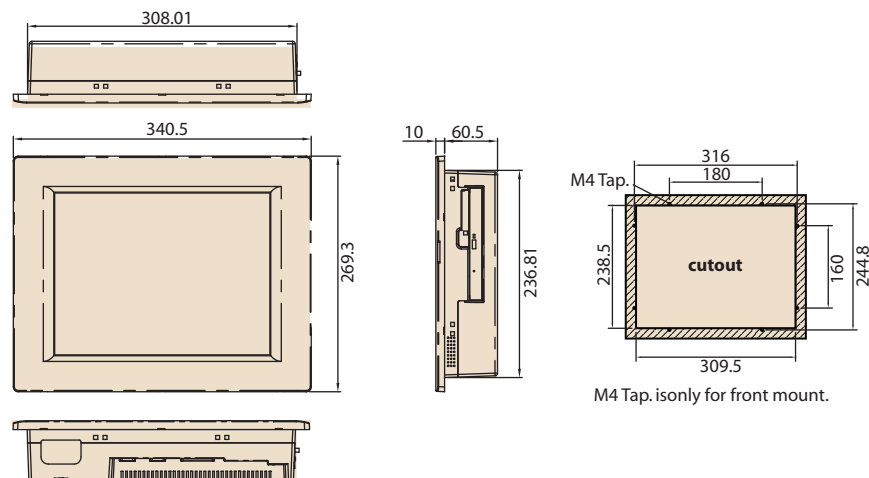

Specifications

Environmental Specifications	Operating Temperature	0-50° C (32-112° F); 0-40° C With Battery Pack
	Storage Temperature	-20 ~ 60° C
	Relative Humidity	10 ~ 95% @ 40° C (non-condensing)
	Shock	10 G peak acceleration (11 msec. duration)
	EMC	BSMI, CE, FCC Class B
	Safety	CB, CCC, BSMI, UL
	Vibration	1 G


Ordering Information

Part No.	Description
PPC-L127T-080-XE	Intel ULV Celeron M only for processor-based Fanless Panel Computer with 12.1" TFT LCD
PPC-L127T-R80-XE	PPC-L127T-080 with Resistive Touch screen
PPC-L127T-CE-RTE	PPC-L127T with Windows CE.Net 6.0 on 128 MB CompactFlash


Accessories

Part No.	Description
PPC-ARM-A03	VESA standard ARM for PPC series
PPC-EXP-L127E	PCI/ISA Expansion kit for PPC-L127T
PPC-L126 WL-MT	Wall Mount Kit for PPC-L126T
PPC-L126Rack-MT	19" Rack Mounting Kit for PPC-L126
PS-DC19-L60	19V DC power adapter module for PPC-L60/L127
989KL12710E	Combo ASS'Y Kit for PPC-L127T
989KL12711E	CD-ROM ASS'Y Kit for PPC-L127T
989KL12709E	Wireless LAN Module for PPC-L127T
989KL12712E	DVD-RW ASS'Y for PPC-L127T
1700001524	Power cable 3P/3P power supply 1.8 M FPM-306
170203183C	Power CABLE 3P Europe (WS-010 + 083) 183 cm
1760000837	Smart Li-ion 3S2P 11.1V 4400mAh-LTC4006/ L127

Fully-Integrated I/O

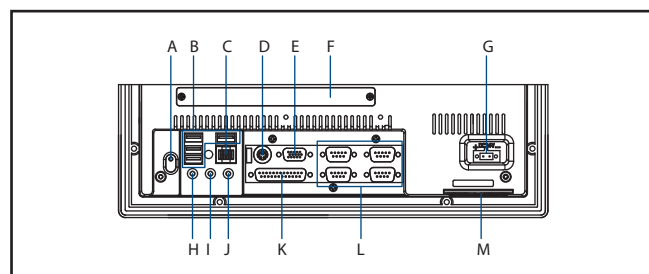

- A. Main power switch
- B. USB 2.0 x 4
- C. Ethernet jack
- D. PS/2 mouse and keyboard
- E. VGA port
- F. PCI/ISA expansion slot cover
- G. DC inlet
- H. Line-in jack
- I. Line-out jack
- J. Mic-in jack
- K. Parallel port
- L. Serial ports
- M. Battery door cover

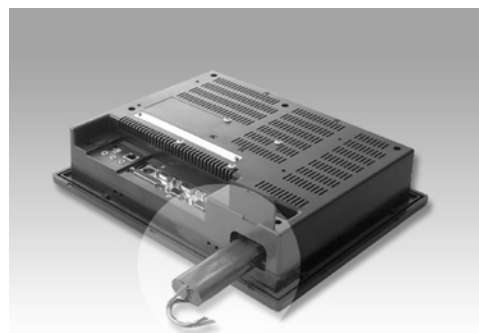



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.