



EC4A SERIES


5-6 WATT 2:1 INPUT RANGE

DC-DC CONVERTERS



FEATURES

- * 5-6W Isolated Output
- * 24-Pin DIP Package
- * Efficiency to 87%
- * 2:1 Input Range
- * Regulated Outputs
- * Pi Input Filter
- * Continuous Short Circuit Protection
- * Meet EMI EN55022 class A (“-E” model)
- * No Tantalum Capacitor inside (“-E” model)
- * Wide Operating Temperature Range (“-E” model)
- * UL60950-1 Approval for H/HM Versions only and “-E” Model

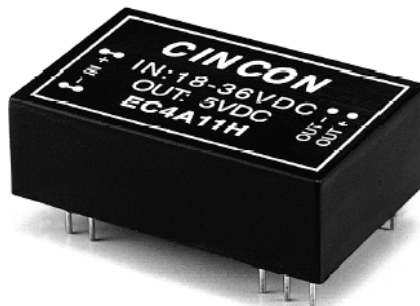

| MODEL NUMBER ⁽¹⁾ | INPUT VOLTAGE ⁽²⁾ | OUTPUT VOLTAGE | OUTPUT CURRENT | | INPUT CURRENT | | | | % EFF. ⁽³⁾ | | CAPACITOR LOAD MAX. |
|-----------------------------|------------------------------|----------------|----------------|---------|---------------|--------|-----------|--------|-----------------------|------|---------------------|
| | | | | | NO LOAD | | FULL LOAD | | | | |
| | | | | | | “-E” | | “-E” | | “-E” | |
| EC4A01 | 9-18 VDC | 5 VDC | 1000 mA | 1000 mA | 7.5 mA | 7.5 mA | 541 mA | 514 mA | 77 | 81 | 4700uF |
| EC4A02 | 9-18 VDC | 12 VDC | 470 mA | 500 mA | 7.5 mA | 10 mA | 573 mA | 595 mA | 82 | 84 | 4700uF |
| EC4A03 | 9-18 VDC | 15 VDC | 400 mA | 400 mA | 7.5 mA | 15 mA | 625 mA | 588 mA | 80 | 85 | 4700uF |
| EC4A04 | 9-18 VDC | ±12 VDC | ±230 mA | ±250 mA | 12 mA | 12 mA | 554 mA | 588 mA | 83 | 85 | 2200uF |
| EC4A05 | 9-18 VDC | ±15 VDC | ±190 mA | ±200 mA | 12 mA | 18 mA | 556 mA | 588 mA | 81 | 85 | 2200uF |
| EC4A06 | 9-18 VDC | ±5 VDC | ±500 mA | ±500 mA | 12 mA | 12 mA | 541 mA | 514 mA | 77 | 81 | 2200uF |
| EC4A07 | 9-18 VDC | 3.3 VDC | 1000 mA | 1200 mA | 7.5 mA | 7.5 mA | 382 mA | 429 mA | 72 | 77 | 4700uF |
| EC4A11 | 18-36 VDC | 5 VDC | 1000 mA | 1000 mA | 5 mA | 5 mA | 260 mA | 251 mA | 80 | 83 | 4700uF |
| EC4A12 | 18-36 VDC | 12 VDC | 470 mA | 500 mA | 5 mA | 8 mA | 280 mA | 291 mA | 84 | 86 | 4700uF |
| EC4A13 | 18-36 VDC | 15 VDC | 400 mA | 400 mA | 5 mA | 8 mA | 298 mA | 287 mA | 84 | 87 | 4700uF |
| EC4A14 | 18-36 VDC | ±12 VDC | ±230 mA | ±250 mA | 7.5 mA | 8 mA | 280 mA | 291 mA | 82 | 86 | 2200uF |
| EC4A15 | 18-36 VDC | ±15 VDC | ±190 mA | ±200 mA | 7.5 mA | 10 mA | 293 mA | 287 mA | 81 | 87 | 2200uF |
| EC4A16 | 18-36 VDC | ±5 VDC | ±500 mA | ±500 mA | 7.5 mA | 8 mA | 260 mA | 254 mA | 80 | 82 | 2200uF |
| EC4A17 | 18-36 VDC | 3.3 VDC | 1000 mA | 1200 mA | 5 mA | 5 mA | 186 mA | 209 mA | 74 | 79 | 4700uF |
| EC4A21 | 36-72 VDC | 5 VDC | 1000 mA | 1000 mA | 2 mA | 3 mA | 132 mA | 126 mA | 79 | 83 | 4700uF |
| EC4A22 | 36-72 VDC | 12 VDC | 470 mA | 500 mA | 2 mA | 6 mA | 142 mA | 144 mA | 83 | 87 | 4700uF |
| EC4A23 | 36-72 VDC | 15 VDC | 400 mA | 400 mA | 2 mA | 6 mA | 154 mA | 144 mA | 81 | 87 | 4700uF |
| EC4A24 | 36-72 VDC | ±12 VDC | ±230 mA | ±250 mA | 3 mA | 6 mA | 142 mA | 144 mA | 81 | 87 | 2200uF |
| EC4A25 | 36-72 VDC | ±15 VDC | ±190 mA | ±200 mA | 3 mA | 6 mA | 147 mA | 144 mA | 81 | 87 | 2200uF |
| EC4A26 | 36-72 VDC | ±5 VDC | ±500 mA | ±500 mA | 3 mA | 5 mA | 130 mA | 126 mA | 80 | 83 | 2200uF |
| EC4A27 | 36-72 VDC | 3.3 VDC | 1000 mA | 1200 mA | 2 mA | 2 mA | 93 mA | 104 mA | 74 | 79 | 4700uF |

NOTE:

1. Suffix “-E” of the models are high efficiency and wide operating temperature version.
2. Nominal Input Voltage is 12, 24 or 48 VDC.
3. Typical value at nominal input voltage and full load.

SPECIFICATIONS

All Specifications Typical At Nominal Line, Full Load, and 25°C Unless Otherwise Noted

INPUT SPECIFICATIONS:

| | | |
|----------------------------------|---------|-------------|
| Input Voltage Range | 12V | 9-18V |
| | 24V | 18-36V |
| | 48V | 36-72V |
| Input Surge Voltage (100ms max.) | 12V | 25Vdc max. |
| | 24V | 50Vdc max. |
| | 48V | 100Vdc max. |
| Input Filter | Pi Type | |

OUTPUT SPECIFICATIONS:

| | | |
|-----------------------------------|----------------------|----------------|
| Voltage Accuracy | ±2.0% max. | |
| Voltage Balance (Dual) | ±1.0% max. | |
| Temperature Coefficient | ±0.05%/°C | |
| Ripple & Noise, 20MHz BW (Note 5) | 3.3V/5V | 100mV p-p, max |
| | 12V/15V | 1% p-p max. |
| Short Circuit Protection | Continuous | |
| Line Regulation | Single/Dual (Note 1) | ±0.5% max. |
| Load Regulation | Single (Note 2) | ±0.5% max. |
| | Dual (Note 3) | ±1.0% max. |
| Start up time | 5 ms max. | |

NOTE:

1. Measured From High Line to Low Line
2. Measured From Full Load to 10% Load
3. Measured From Full Load to 1/4 Load
4. Maximum case temperature under any operating condition should not exceed 95°C (Plastic Case), 100°C (Copper Case)
5. The output noise is measured with 0.1µF MLCC across for SMD package
6. S and HS models for "E" Version Only

GENERAL SPECIFICATIONS:



| | |
|--|--|
| Efficiency | See Table |
| Isolation Voltage: | |
| 500 VDC min. | Standard Models |
| 3K VDC min. ... (Non-Conductive Black Plastic Only) | Suffix "H" Models |
| 1.5K VDC min. | Suffix "HM" Models |
| Isolation Resistance | 10 ⁹ ohm min. |
| Isolation Capacitance | 250pF Typ. |
| Switching Frequency | 100KHz, min. |
| Operating Ambient Temperature Range | -25°C to +71°C |
| | "-E" models: -40°C to +85°C with Derating |
| Power de-rating Curve | see Figure1 |
| Case Temperature (Note 4) ... Plastic/Copper case... | 95°C/100°C max. |
| Cooling | Natural Convection |
| Storage Temperature Range | -40°C to +100°C |
| Humidity | 95% RH max. Non condensing |
| MTBF | MIL-STD-217F 2000Khrs typ. |
| | "-E" models: 1800Khrs typ. |
| Dimensions | DIP..... 1.25×0.80×0.40 inches(31.8×20.3×10.2mm) |
| | SMD 1.25×0.80×0.45 inches(31.8×20.3×11.4mm) |
| | S/HS Models (note 6) ... 1.25×0.80×0.41 inches(31.8×20.3×10.4mm) |

Case Material:

| | |
|-------------------|--|
| Standard Models | Non-Conductive Black Plastic |
| Suffix "M" Models | Black Coated Copper with Non-conductive Base |
| Suffix "S" Models | SMD package |
| Weight | 12.5g |

Case A Dimensions:

NOTE: Pin Size is 0.02 ±0.002Inch (0.5±0.05mm)DIA
 All Dimensions In Inches (mm)
 Tolerances Inches: X.XX= ±0.02 , X.XXX= ±0.010
 Millimeters: X.X= ±0.5 , X.XX=±0.25

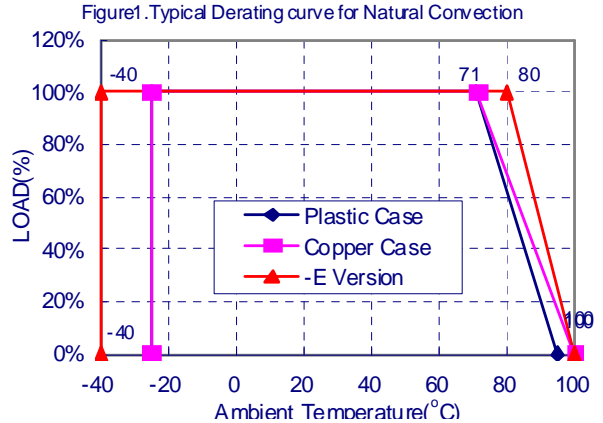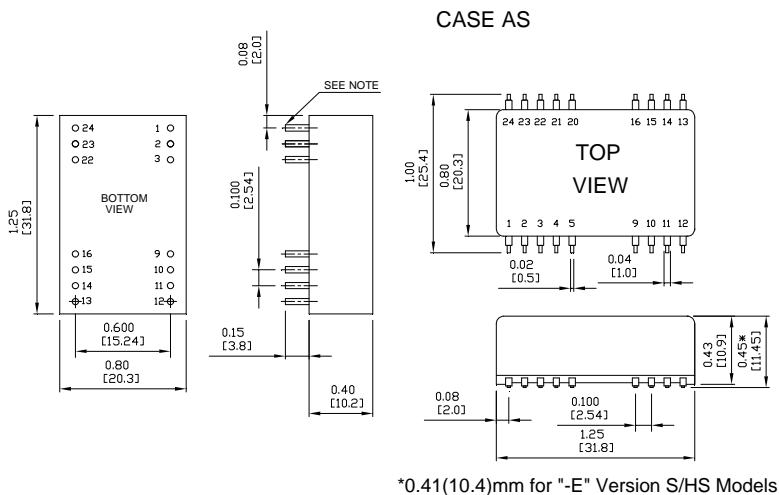

| PIN CONNECTION | | | | | | | | | |
|----------------|---------------|-----|-------------|-----|---------------|---------------|-----|-------------|-----|
| Pin | 500 VDC | | | | 1.5K & 3K VDC | | | | |
| | Single Output | | Dual Output | | Pin | Single Output | | Dual Output | |
| | DIP | SMD | DIP | SMD | | DIP | SMD | DIP | SMD |
| 1,24 | +V Input | | +V Input | | 1,24 | NP | NC | NP | NC |
| 2,23 | NC | | -V Output | | 2,3 | -V Input | | -V Input | |
| 3,22 | NC | | Common | | 4,5 | NP | NC | NP | NC |
| 4 | NP | NC | NP | NC | 9 | NC | | Common | |
| 5 | NP | NC | NP | NC | 10,15 | NC | | NC | |
| 9 | NP | NC | NP | NC | 11 | NC | | -V Output | |
| 10,15 | -V Output | | Common | | 12,13 | NP | NC | NP | NC |
| 11,14 | +V Output | | +V Output | | 14 | +V Output | | +V Output | |
| 12,13 | -V Input | | -V Input | | 16 | -V Output | | Common | |
| 16 | NP | NC | NP | NC | 20,21 | NP | NC | NP | NC |
| 20,21 | NP | NC | NP | NC | 22,23 | +V Input | | +V Input | |

* NP-NO PIN
 * NC-NO CONNECTION WITH PIN



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.