

### FEATURES

- RoHS compliant
- UL1950 recognized
- Efficiency to 82%
- Power density up to 0.44W/cm<sup>3</sup>
- Dual outputs
- Low profile package
- UL 94V-0 package material
- No heatsink required
- Footprint 4.75cm<sup>2</sup>
- 6kVDC isolation
- 5V & 12V input
- 5V, 9V, 12V and 15V output
- Internal SMD construction
- Fully encapsulated with toroidal magnetics
- MTTF up to 747 kHrs
- PCB mounting

### DESCRIPTION

The NMS series of DC/DC converters are UL1950 recognized which makes them ideal for all telecom and safety applications where approved isolation is required. The low profile package allows mounting in rack systems without risk of touching other boards. The output configuration allows all of the rated power to be drawn from a single pin provided the total load does not exceed 2 watts. The devices feature low noise and low isolation capacitance suitable for applications in high noise environments, e.g. heavy electrical machine interface.

### SELECTION GUIDE

Order Code	Nominal Input Voltage	Output Voltage	Output Current	Efficiency	Isolation Capacitance	MTTF <sup>1</sup>
	V	V	mA	%	pF	kHrs
NMS0505C	5	±5	±200	74	1.8	747
NMS0509C	5	±9	±111	76	1.9	327
NMS0512C	5	±12	±83	77	2.0	169
NMS0515C	5	±15	±67	78	2.1	93
NMS1205C	12	±5	±200	78	1.9	365
NMS1209C	12	±9	±111	81	2.0	224
NMS1212C	12	±12	±83	82	2.1	136
NMS1215C	12	±15	±67	82	2.2	82

When operated **with** additional external load capacitance the rise time of the input voltage will determine the maximum external capacitance value for guaranteed start up. The slower the rise time of the input voltage the greater the maximum value of the additional external capacitance for reliable start up.

### INPUT CHARACTERISTICS

Parameter	Conditions	Min.	Typ.	Max.	Units
Voltage range	Continuous operation, 5V input types	4.5	5	5.5	V
	Continuous operation, 12V input types	10.8	12	13.2	

### OUTPUT CHARACTERISTICS

Parameter	Conditions	Min.	Typ.	Max.	Units
Rated Power <sup>2</sup>	T <sub>A</sub> =0°C to 70°C			2	W
Voltage Set Point Accuracy	See tolerance envelope	-7.5		10	%
Line regulation	High V <sub>IN</sub> to low V <sub>IN</sub>		1.0	1.2	%/%
	10% load to rated load, 5V output types		10	15	
Load Regulation	10% load to rated load, 9V output types		6	15	%
	10% load to rated load, 12V output types		6	15	
	10% load to rated load, 15V output types		6	15	
Ripple and Noise	BW=DC to 20MHz, all output types			200	mV p-p

### ISOLATION CHARACTERISTICS

Parameter	Conditions	Min.	Typ.	Max.	Units
Isolation test voltage	Flash tested for 1 second	6000			VDC
Resistance	Viso= 500VDC		10		GΩ

### GENERAL CHARACTERISTICS

Parameter	Conditions	Min.	Typ.	Max.	Units
Switching frequency	All input types		35		kHz

### ABSOLUTE MAXIMUM RATINGS

Short-circuit protection <sup>3</sup>	1 second
Lead temperature 1.5mm from case for 10 seconds	300°C
Internal power dissipation	900mW
Input voltage V <sub>IN</sub> , NMS05 types	7V
Input voltage V <sub>IN</sub> , NMS12 types	15V

1. Calculated using MIL-HDBK-217F with nominal input voltage at full load.

2. See derating graph.

3. Supply voltage must be disconnected at the end of the short circuit duration.

All specifications typical at T<sub>A</sub>=25°C, nominal input voltage and rated output current unless otherwise specified.




For full details go to  
[www.murata-ps.com/rohs](http://www.murata-ps.com/rohs)


**TEMPERATURE CHARACTERISTICS**

Parameter	Conditions	Min.	Typ.	Max.	Units
Specification	All output types	0		70	°C
Storage		-50		130	
Case Temperature above ambient	All output types			32	
Cooling	Free air convection				

**TEMPERATURE DERATING GRAPH**

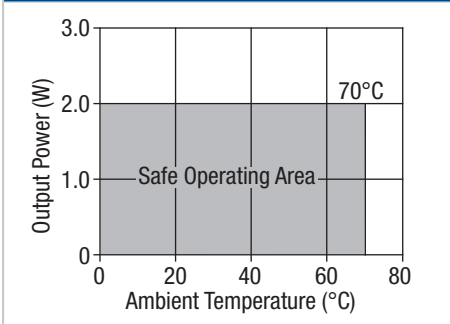

**TOLERANCE ENVELOPE**

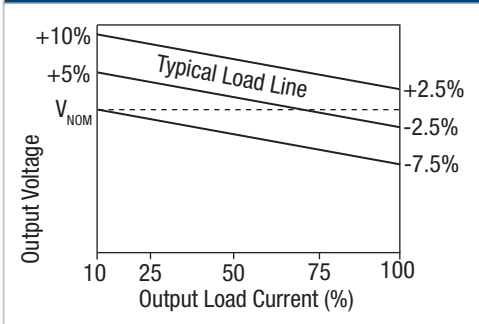

**SAFETY APPROVAL**

The NMS series has been recognised by Underwriters Laboratory (UL) to UL 60950 for supplementary insulation up to 300Vrms and reinforced insulation up to 150Vrms working voltage. File number E179522 applies.

**TECHNICAL NOTES**

**ISOLATION VOLTAGE**

'Hi Pot Test', 'Flash Tested', 'Withstand Voltage', 'Proof Voltage', 'Dielectric Withstand Voltage' & 'Isolation Test Voltage' are all terms that relate to the same thing, a test voltage, applied for a specified time, across a component designed to provide electrical isolation, to verify the integrity of that isolation.

Murata Power Solutions NMS series of dc/dc converters are all 100% production tested at their stated isolation voltage. This is 6kVDC for 1 second.

A question commonly asked is, "What is the continuous voltage that can be applied across the part in normal operation?"


The NMS series has been recognized by Underwriters Laboratory to a working voltage of 300Vrms for Supplementary Insulation system and 150Vrms for Reinforced Insulation systems.

**REPEATED HIGH-VOLTAGE ISOLATION TESTING**

It is well known that repeated high-voltage isolation testing of a barrier component can actually degrade isolation capability, to a lesser or greater degree depending on materials, construction and environment. We therefore strongly advise against repeated high voltage isolation testing, but if it is absolutely required, that the voltage be reduced by 20% from specified test voltage.

**PACKAGE SPECIFICATIONS**

**MECHANICAL DIMENSIONS**

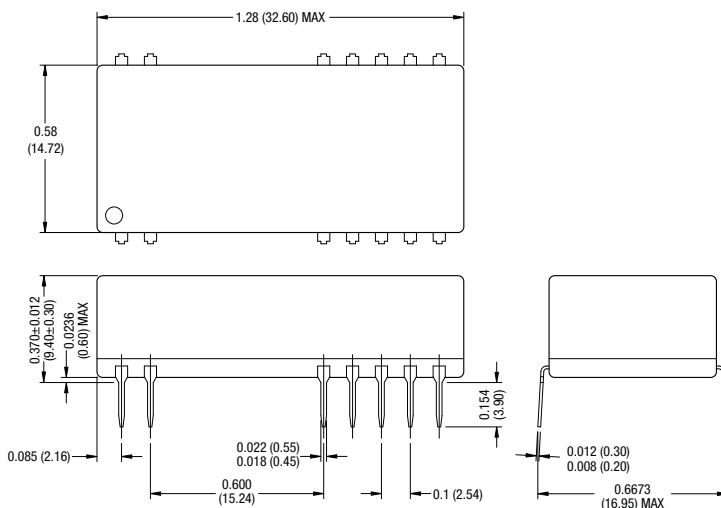


All dimensions in inches ±0.01 (mm ±0.25mm). All pins on a 0.1 (2.54) pitch and within ±0.01 (0.25) of true position.

Weight: 7.5g

**PIN CONNECTIONS**


Pin	Function
1	+VIN
2	-VIN
8	-VOUT
9	NC
10	OV
11	NC
12	+VOUT
13	+VOUT
14	NC
15	OV
16	NC
17	-VOUT
23	NC
24	NC

**RECOMMENDED FOOTPRINT DETAILS**

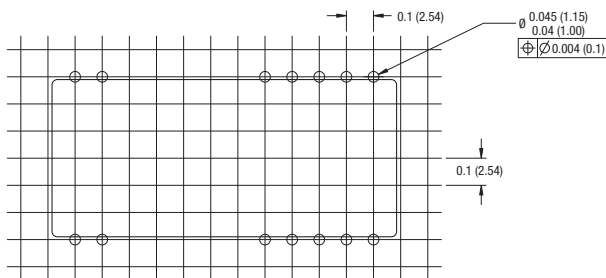

Unless otherwise stated all dimensions in inches ±0.01 (mm) ±0.5mm.

**TUBE OUTLINE DIMENSIONS**



Unless otherwise stated all dimensions in inches ±0.01 (mm) ±0.5mm.  
Tube length : 20.47±0.079 (520mm ±2mm).

Tube Quantity : 15

**RoHS COMPLIANCE INFORMATION**



This series is compatible with RoHS soldering systems with a peak wave solder temperature of 300°C for 10 seconds. The pin termination finish on this product series is Matte Tin over Nickel Preplate. The series is backward compatible with Sn/Pb soldering systems. For further information, please visit [www.murata-ps.com/rohs](http://www.murata-ps.com/rohs)

Murata Power Solutions, Inc.  
11 Cabot Boulevard, Mansfield, MA 02048-1151 U.S.A.  
ISO 9001 and 14001 REGISTERED



**This product is subject to the following [operating requirements](#) and the [Life and Safety Critical Application Sales Policy](#): Refer to: <http://www.murata-ps.com/requirements/>**

Murata Power Solutions, Inc. makes no representation that the use of its products in the circuits described herein, or the use of other technical information contained herein, will not infringe upon existing or future patent rights. The descriptions contained herein do not imply the granting of licenses to make, use, or sell equipment constructed in accordance therewith. Specifications are subject to change without notice. © 2012 Murata Power Solutions, Inc.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.