

STAMPED AND FORMED CONTACTS, PG 1 of 2

Click on [blue underlined part numbers](#) to be taken to their spec sheets.

OPTIONS


PART NUMBER: [AT62-14-01XX](#)
DESCRIPTION: CONTACT, SOCKET, STAMPED, SIZE 16

MATERIAL:
 CONTACT BODY: COPPER ALLOY
 HOOD: STAINLESS STEEL
PLATING SUFFIX CODE:
 XX=22 NICKEL PLATING
 XX=44 GOLD PLATING
CONTACT GENERAL DATA SPECIFICATION: S2-15217
AVAILABLE CRIMPERS: ATT-16-00, MFX-3950 & MFX-3953
CRIMPER SPECIFICATIONS: S2-15223 & S2-15224
CRIMP INFORMATION DRAWING: S2-15221 & S2-15222
CONTACTS PER REEL: APPROX. 4000 (PARTIAL REELS AVAILABLE)




PART NUMBER: [AT62-16-01XX](#)
DESCRIPTION: CONTACT, SOCKET, STAMPED, SIZE 16

MATERIAL:
 CONTACT BODY: COPPER ALLOY
 HOOD: STAINLESS STEEL
PLATING SUFFIX CODE:
 XX=22 NICKEL PLATING
 XX=44 GOLD PLATING
CONTACT GENERAL DATA SPECIFICATION: S2-15217
AVAILABLE CRIMPERS: ATT-16-00, ATT-16-01, MFX-3950 & MFX-3953
CRIMPER SPECIFICATIONS: S2-15223 & S2-15224
CRIMP INFORMATION DRAWING: S2-15221 & S2-15222
CONTACTS PER REEL: APPROX. 4000 (PARTIAL REELS AVAILABLE)

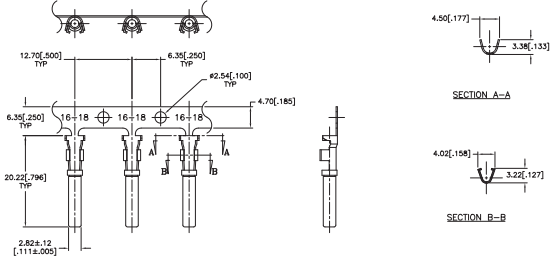


PART NUMBER: [AT62-16-06XX](#)
DESCRIPTION: CONTACT, SOCKET, STAMPED, SIZE 16

MATERIAL:
 CONTACT BODY: COPPER ALLOY
 HOOD: STAINLESS STEEL
PLATING SUFFIX CODE:
 XX=22 NICKEL PLATING
 XX=44 GOLD PLATING
CONTACT GENERAL DATA SPECIFICATION: S2-15217
AVAILABLE CRIMPERS: ATT-16-01, MFX-3950 & MFX-3953
CRIMPER SPECIFICATIONS: S2-15223 & S2-15224
CRIMP INFORMATION DRAWING: S2-15221 & S2-15222
CONTACTS PER REEL: APPROX. 4000 (PARTIAL REELS AVAILABLE)

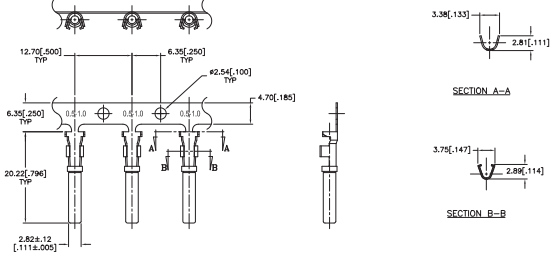

PART NUMBER: [AT60-14-01XX](#)
DESCRIPTION: CONTACT, PIN, STAMPED, SIZE 16

MATERIAL: COPPER ALLOY
PLATING SUFFIX CODE:
 XX=22 NICKEL PLATING
 XX=44 GOLD PLATING
CONTACT GENERAL DATA SPECIFICATION: S2-15217
AVAILABLE CRIMPERS: ATT-16-00, MFX-3950 & MFX-3953
CRIMPER SPECIFICATIONS: S2-15223 & S2-15224
CRIMP INFORMATION DRAWING: S2-15221 & S2-15222
CONTACTS PER REEL: APPROX. 4000 (PARTIAL REELS AVAILABLE)

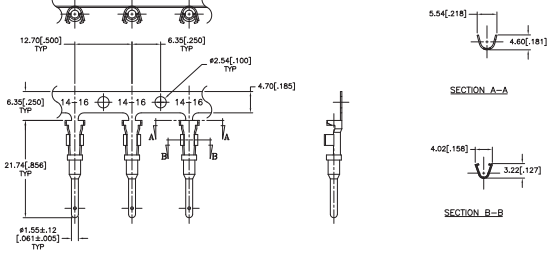


STAMPED AND FORMED CONTACTS, PG 2 of 2


Click on [blue underlined part numbers](#) to be taken to their spec sheets.

OPTIONS

PART NUMBER: [AT60-16-01XX](#)
DESCRIPTION: CONTACT, PIN, STAMPED, SIZE 16
MATERIAL: COPPER ALLOY
PLATING SUFFIX CODE:
 XX=22 NICKEL PLATING
 XX=44 GOLD PLATING
CONTACT GENERAL DATA SPECIFICATION: S2-15217
AVAILABLE CRIMPERS: ATT-16-00, ATT-16-01, MFX-3950 & MFX-3953
CRIMPER SPECIFICATIONS: S2-15223 & S2-15224
CRIMP INFORMATION DRAWING: S2-15221 & S2-15222
CONTACTS PER REEL: APPROX. 4000 (PARTIAL REELS AVAILABLE)

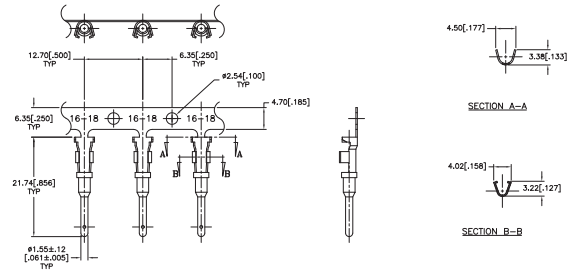

PART NUMBER: [AT60-16-06XX](#)
DESCRIPTION: CONTACT, PIN, STAMPED, SIZE 16
MATERIAL: COPPER ALLOY
PLATING SUFFIX CODE:
 XX=22 NICKEL PLATING
 XX=44 GOLD PLATING
CONTACT GENERAL DATA SPECIFICATION: S2-15217
AVAILABLE CRIMPERS: ATT-16-01, MFX-3950 & MFX-3953
CRIMPER SPECIFICATIONS: S2-15223 & S2-15224
CRIMP INFORMATION DRAWING: S2-15221 & S2-15222
CONTACTS PER REEL: APPROX. 4000 (PARTIAL REELS AVAILABLE)

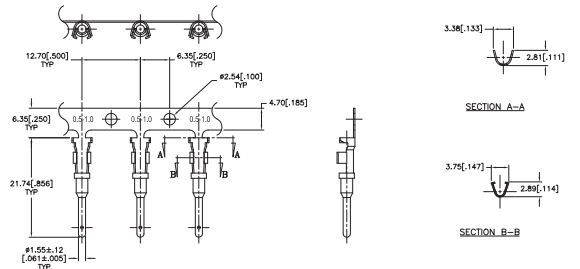

SOLID/MACHINED CONTACTS

Click on [blue underlined part numbers](#) to be taken to their spec sheets.


OPTIONS

MILITARY-STYLE

PART NUMBER: [AT60-202-16XX](#)
DESCRIPTION: CONTACT, PIN, SOLID MACHINED, SIZE 16
MATERIAL: COPPER ALLOY
PLATING SUFFIX CODE:
 XX=141 NICKEL PLATING
 XX=31 GOLD PLATING
CONTACT GENERAL DATA SPECIFICATION: S2-15217
AVAILABLE CRIMPERS: CA-5D12 & CA-5E12
CRIMPER SPECIFICATIONS: S2-15219 & S2-15220
CRIMP INFORMATION DRAWING: S2-15218




PART NUMBER: [AT62-201-16XX](#)
DESCRIPTION: CONTACT, SOCKET, SOLID MACHINED, SIZE 16
MATERIAL:
 CONTACT BODY: COPPER ALLOY
 HOOD: STAINLESS STEEL
PLATING SUFFIX CODE:
 XX=141 NICKEL PLATING
 XX=31 GOLD PLATING
CONTACT GENERAL DATA SPECIFICATION: S2-15217
AVAILABLE CRIMPERS: CA-5D12 & CA-5E12
CRIMPER SPECIFICATIONS: S2-15219 & S2-15220
CRIMP INFORMATION DRAWING: S2-15218

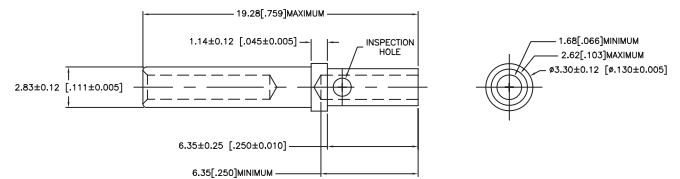


ROCKSOLID™ CONTACTS


PART NUMBER: [65-54942-14](#)
DESCRIPTION: CONTACT, SOCKET, ROCKSOLID, SIZE 16
AWG RANGE: 14AWG
MATERIAL: COPPER ALLOY
PLATING: GOLD
CONTACT GENERAL DATA SPECIFICATION: S2-15217
AVAILABLE CRIMPERS: CA-5D12 & CA-5E12
CRIMPER SPECIFICATIONS: S2-15219 & S2-15220
CRIMP INFORMATION DRAWING: S2-15218

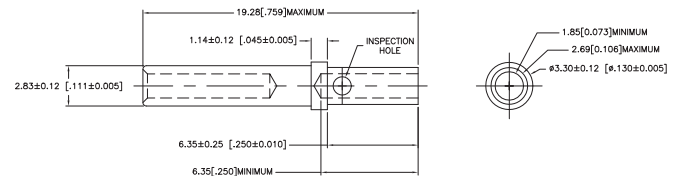

PART NUMBER: [65-54942-16](#)
DESCRIPTION: CONTACT, SOCKET, ROCKSOLID, SIZE 16
AWG RANGE: 16AWG
MATERIAL: COPPER ALLOY
PLATING: GOLD
CONTACT GENERAL DATA SPECIFICATION: S2-15217
AVAILABLE CRIMPERS: CA-5D12 & CA-5E12
CRIMPER SPECIFICATIONS: S2-15219 & S2-15220
CRIMP INFORMATION DRAWING: S2-15218

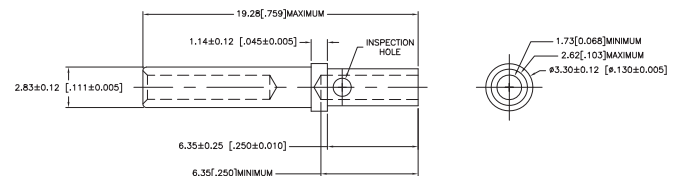

PART NUMBER: [65-54942-20](#)
DESCRIPTION: CONTACT, SOCKET, ROCKSOLID, SIZE 16
AWG RANGE: 20AWG
MATERIAL: COPPER ALLOY
PLATING: GOLD
CONTACT GENERAL DATA SPECIFICATION: S2-15217
AVAILABLE CRIMPERS: CA-5D12 & CA-5E12
CRIMPER SPECIFICATIONS: S2-15219 & S2-15220
CRIMP INFORMATION DRAWING: S2-15218

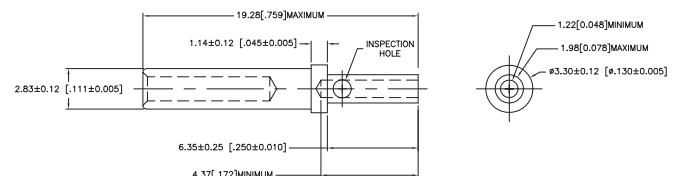


REVISIONS					
REV	ECO	DESCRIPTION	DATE	BY	APPR
A1	-	RELEASE NUMBER 016571	6/12/09	B.D.B.	M.R.F.

USE CRIMPER NUMBER:
ATT-16-00 WITH CAVITY A & B

CONTACT P/N:	INSULATION ϕ	CAVITY	WIRE SIZE
AT60-16-01**	.075 - .140	B	1.5mm ²
AT62-16-01**	[1.91 - 3.56]	A	16AWG
		A	1.0mm ²
AT60-14-01**	.095 - .150	B	14AWG
AT62-14-01**	[2.41 - 3.81]	B	2.0mm ²
		B	1.5mm ²
		A	1.5mm ²
		A	16AWG
		A	1.0mm ²
AT60-16-06**	.055 - .100	A	16AWG
AT62-16-06**	[1.40 - 2.54]	A	1.0mm ²

USE CRIMPER NUMBER:
ATT-16-01 WITH CAVITY C & D

CONTACT P/N:	INSULATION ϕ	CAVITY	WIRE SIZE
AT60-16-01**	.075 - .140	D	18AWG
AT62-16-01**	[1.91 - 3.56]	D	.75mm ²
AT60-16-06**	.055 - .100	D	18AWG
AT62-16-06**	[1.40 - 2.54]	D	.75mm ²
		C	.50mm ²

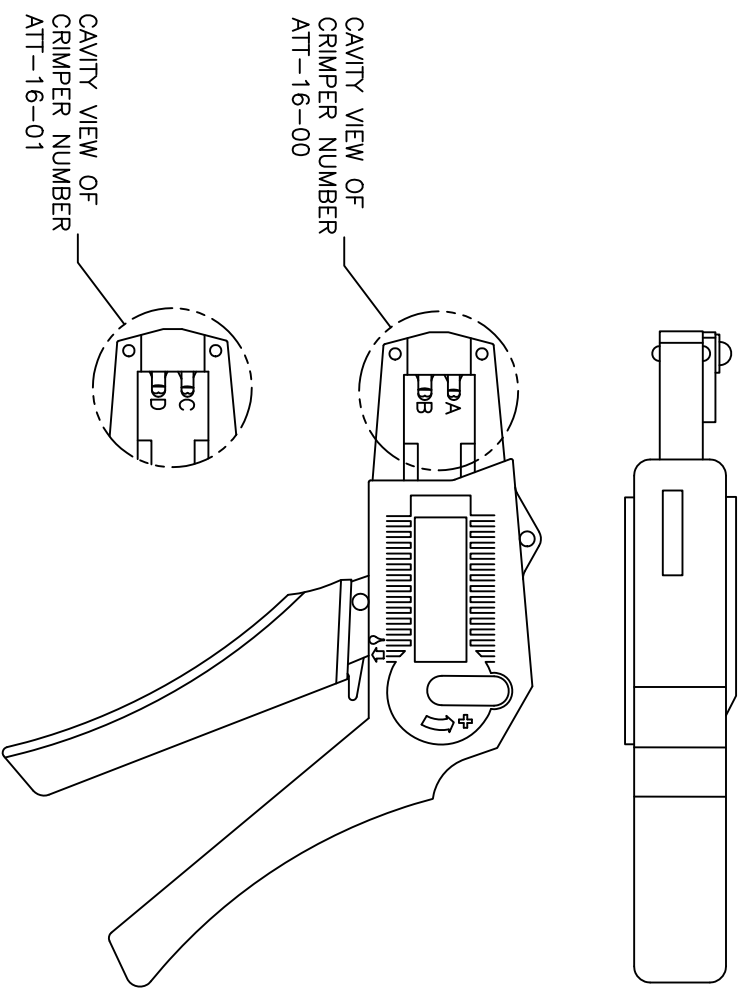



ALL REFERENCES TO DEUTSCH PRODUCTS OR SPECIFICATIONS ARE FOR COMPARISON PURPOSES ONLY, AND REFER TO DEUTSCH INDUSTRIAL PRODUCTS.

- NOTES (UNLESS OTHERWISE SPECIFIED):
- ALL DIMENSIONS IN INCHES [MILLIMETERS]
 - FOR PLATING CODES ** SEE CONTACT DATA DRAWINGS.
 - THIS TOOL IS FOR CRIMPING SIZE 16 CONTACTS ONLY TO WIRES LISTED IN THE CHARTS.
 - DEUTSCH IPD CROSS REFERENCE PART NUMBERS ARE DTT-16-00 AND DTT-16-01.


QUANTITY	PART NUMBER	DESCRIPTION	ITER#
MATERIALS LIST			
<p>SINE Systems Corporation A Subsidiary of Amphenol Corporation 44724 Morley Drive Clifton Township, NJ 08036</p> <p>INSTRUCTIONS: ATT-16-00 & 01 CRIMPER, HAND, STAMPED CONTACTS</p>			
<p>UNLESS OTHERWISE SPECIFIED</p> <p>1) All dimensions are in inches. 2) Tolerances are as follows: 3) Finish: .0008" Ra 4) Hole Reference = A</p>		<p>SIGNATURES</p> <p>DATE</p> <p>6/8/09</p> <p>6/8/09</p> <p>6/8/09</p>	
<p>PROCESS SPECIFICATIONS</p> <p>N/A</p>		<p>THE USE OF THIS DOCUMENT IS UNLIMITED DESIGN FEATURES. SPECIAL DATA SHEETS ARE THE PROPERTY OF AMPHENOL CORP. ALL DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED.</p> <p>DOCUMENTS REFERENCED HEREON ARE:</p> <p>AMPHENOL LIMITED LIABILITY CO.</p>	
<p>NOT ASY:</p>		<p>SIZE: FCSD NO/DWG NO: B 16K44</p> <p>SCALE: NONE</p> <p>S2-15223</p> <p>SHEET 1 OF 1</p>	

REV ZONE		ECO	DESCRIPTION	DATE	BY	APPR
AI	-	-	RELEASE NUMBER 016571	6/12/09	B.D.B.	M.R.F.


CONTACT LOCATOR "TURRET"
THREE POSITION FOR SIZE
12, 16 & 20 MALE AND
FEMALE CONTACTS

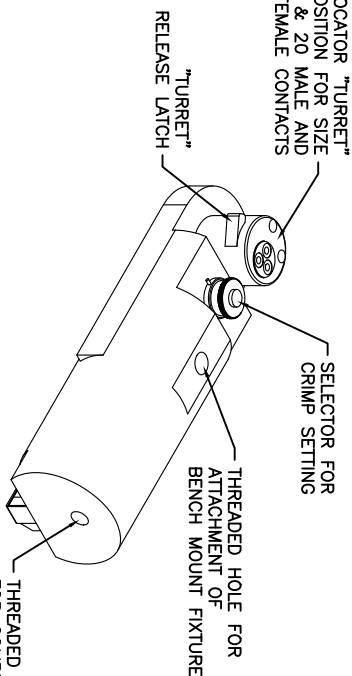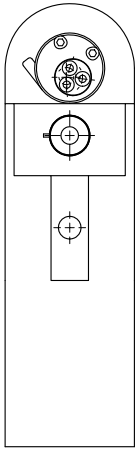


THREADED OPENING
FOR COMPRESSED
AIR FITTING



- NOTES:
1. THE CA-5E12 IS A COMPRESSED AIR OPERATED HAND CRIMPER FOR ELECTRICAL CONTACTS. IT IS ADJUSTABLE TO 3 CONTACT SIZES (12, 16 & 20) AND 8 INDENTER CRIMP POSITIONS FOR DIFFERENT WIRE SIZES (12AWG THRU 26 AWG).
 2. 80-120 PSI COMPRESSED AIR.
 3. WEIGHT: 3.1 LBS
 4. SELECTING CONTACT SIZE: PRESS THE RELEASE LATCH ON SIDE OF THE CONTACT LOCATOR "TURRET". ROTATE TO THE DESIRED CONTACT SIZE. THE TOP OF THE "TURRET" IS EMBOSSED WITH THE CONTACT SIZES.
 5. SELECTING WIRE SIZE: GRASP THE SELECTOR AND ROTATE TO THE DESIRED NUMBER.

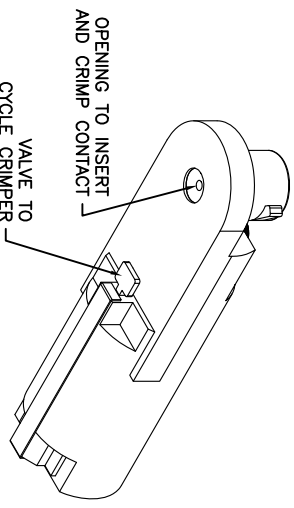

GAGE PART NO.	A GO DIA.	B NO-GO DIA.	SELECTOR NUMBER
G125	.0390	.0440	4

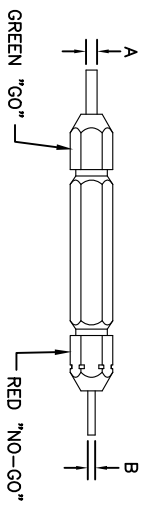


GAGING INSTRUCTIONS


CAUTION!
DO NOT CRIMP GAGE!

"GO" GAGING: OPERATE TOOL TO FULLY CLOSED POSITION. INSERT "GO" GAGE END AS SHOWN. GAGE MUST PASS FREELY BETWEEN INDENTER TIPS.

"NO-GO" GAGING: OPERATE TOOL TO FULLY CLOSED POSITION. INSERT "NO-GO" GAGE END AS SHOWN. THE "NO-GO" MAY PARTIALLY ENTER THE INDENTER OPENING, BUT MUST NOT PASS COMPLETELY THROUGH THE OPENING.



SELECTOR NUMBER	A GO DIA.	B NO-GO DIA.
1	.0280	.0330
2	.0320	.0370
3	.0360	.0410
4	.0390	.0440
5	.0450	.0500
6	.0520	.0570
7	.0590	.0640
8	.0680	.0730



CONTACT SIZE	LOCATOR "TURRET" POSITION COLOR	SELECTOR NUMBER
20-20	RED	1
16-22	BLUE	4
16-20	BLUE	1
16-16	BLUE	4
12-16	YELLOW	4
12-12	YELLOW	1

QUANTITY PART NUMBER MATERIALS LIST DESCRIPTION ITEM

UNLESS OTHERWISE SPECIFIED	SIGNATURES	DATE
1) All dimensions are in inches.	DESIGN: BERNIM	6/2/09
2) Pl. DEC 2000 1 Position 31/4"	CHECKER: TONCE	6/3/09
3) Pl. DEC 2000 1 Position 31/4"	ENGINEER: BERNIM	6/3/09
4) Pl. DEC 2000 1 Position 31/4"	APPROVAL: BERNIM	6/3/09
5) Revision Standard Per: A	CUSTOMER:	
6) Title: SS-20020		
7) Material Specification:		
8) Material Specification:		
9) Material Specification:		
10) Material Specification:		
11) Material Specification:		
12) Material Specification:		
13) Material Specification:		
14) Material Specification:		
15) Material Specification:		
16) Material Specification:		
17) Material Specification:		
18) Material Specification:		
19) Material Specification:		
20) Material Specification:		
21) Material Specification:		
22) Material Specification:		
23) Material Specification:		
24) Material Specification:		
25) Material Specification:		
26) Material Specification:		
27) Material Specification:		
28) Material Specification:		
29) Material Specification:		
30) Material Specification:		
31) Material Specification:		
32) Material Specification:		
33) Material Specification:		
34) Material Specification:		
35) Material Specification:		
36) Material Specification:		
37) Material Specification:		
38) Material Specification:		
39) Material Specification:		
40) Material Specification:		
41) Material Specification:		
42) Material Specification:		
43) Material Specification:		
44) Material Specification:		
45) Material Specification:		
46) Material Specification:		
47) Material Specification:		
48) Material Specification:		
49) Material Specification:		
50) Material Specification:		
51) Material Specification:		
52) Material Specification:		
53) Material Specification:		
54) Material Specification:		
55) Material Specification:		
56) Material Specification:		
57) Material Specification:		
58) Material Specification:		
59) Material Specification:		
60) Material Specification:		
61) Material Specification:		
62) Material Specification:		
63) Material Specification:		
64) Material Specification:		
65) Material Specification:		
66) Material Specification:		
67) Material Specification:		
68) Material Specification:		
69) Material Specification:		
70) Material Specification:		
71) Material Specification:		
72) Material Specification:		
73) Material Specification:		
74) Material Specification:		
75) Material Specification:		
76) Material Specification:		
77) Material Specification:		
78) Material Specification:		
79) Material Specification:		
80) Material Specification:		
81) Material Specification:		
82) Material Specification:		
83) Material Specification:		
84) Material Specification:		
85) Material Specification:		
86) Material Specification:		
87) Material Specification:		
88) Material Specification:		
89) Material Specification:		
90) Material Specification:		
91) Material Specification:		
92) Material Specification:		
93) Material Specification:		
94) Material Specification:		
95) Material Specification:		
96) Material Specification:		
97) Material Specification:		
98) Material Specification:		
99) Material Specification:		
100) Material Specification:		

SINE Systems Corporation
A Subsidiary of Amphenol Corporation
44724 Mowley Drive
Canton Township, MI 48036

INSTRUCTIONS FOR CA-5E12
CRIMPER, PNEUMATIC

SIZE: 10K44
SCALE: NONE
S2-15220
SHEET 1 OF 1

REV ZONE		ECO		REVISIONS		DESCRIPTION	DATE	BY	APPR
AI	-	-	-	RELEASE NUMBER	016571		6/12/09	B.D.B.	M.R.F.

CONTACT LOCATOR
"TURRET"
THREE POSITIONS FOR
SIZE 12, 16 & 20 MALE
AND FEMALE CONTACTS

"TURRET" RELEASE LATCH

6.25 INCH
MAXIMUM
OPEN

2.30 INCH
MAXIMUM
CLOSED

SELECTOR FOR CRIMP
SETTING

1.125 INCH MAX.

9.75 INCH MAXIMUM

1.00 INCH MAX.


- NOTES:
- THE CA-5D12 IS A HAND OPERATED CRIMPER FOR ELECTRICAL CONTACTS. IT IS ADJUSTABLE TO 3 CONTACT SIZES (12, 16 & 20) AND 8 INDENTER CRIMP POSITIONS FOR DIFFERENT WIRE SIZES (12AWG THRU 26 AWG).
 - WEIGHT: 1.64 LBS
 - SELECTING CONTACT SIZE: PRESS THE RELEASE LATCH ON SIDE OF THE CONTACT LOCATOR "TURRET". ROTATE TO THE DESIRED CONTACT SIZE. THE TOP OF THE "TURRET" IS EMBOSSED WITH THE CONTACT SIZES.
 - SELECTING WIRE SIZE: REMOVE THE LOCKING CLIP. GRASP THE SELECTOR AND ROTATE TO THE DESIRED NUMBER.

CONTACT SIZE	LOCATOR "TURRET" POSITION COLOR	SELECTOR NUMBER								
		1	2	3	4	5	6	7	8	
20-20	RED	1	2	3	4					
16-22	BLUE	4	5	6						
16-20	BLUE	1	2	3	4					
16-16	BLUE				4	5	6			
12-16	YELLOW				4	5	6			
12-12	YELLOW						7			8

GAGING INSTRUCTIONS


CAUTION!
DO NOT CRIMP GAGE!

GAGE PART NO.	A GO DIA.	B NO-GO DIA.	SELECTOR NUMBER
G125	.0390	.0440	4

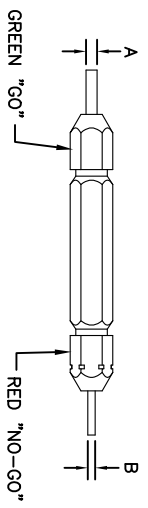

"GO" GAGING: OPERATE TOOL TO FULLY CLOSED POSITION. INSERT "GO" GAGE END AS SHOWN. GAGE MUST PASS FREELY BETWEEN INDENTER TIPS.

"NO-GO" GAGING: OPERATE TOOL TO FULLY CLOSED POSITION. INSERT "NO-GO" GAGE END AS SHOWN. THE "NO-GO" MAY PARTIALLY ENTER THE INDENTER OPENING, BUT MUST NOT PASS COMPLETELY THROUGH THE OPENING.



SELECTOR NUMBER	A ±.0001 GO DIA.	B ±.0001 NO-GO DIA.
1	.0280	.0330
2	.0320	.0370
3	.0360	.0410
4	.0390	.0440
5	.0450	.0500
6	.0520	.0570
7	.0590	.0640
8	.0680	.0730

QUANTITY	PART NUMBER	DESCRIPTION	ITEM

MATERIALS LIST		SIGNATURES		DATE
UNLESS OTHERWISE SPECIFIED				
1) All dimensions are in inches.				
2) Pl. SEC. 34.00				
3) Pl. SEC. 34.00				
4) Pl. SEC. 34.00				
5) Pl. SEC. 34.00				
6) Pl. SEC. 34.00				
7) Pl. SEC. 34.00				
8) Pl. SEC. 34.00				
9) Pl. SEC. 34.00				
10) Pl. SEC. 34.00				
11) Pl. SEC. 34.00				
12) Pl. SEC. 34.00				
13) Pl. SEC. 34.00				
14) Pl. SEC. 34.00				
15) Pl. SEC. 34.00				
16) Pl. SEC. 34.00				
17) Pl. SEC. 34.00				
18) Pl. SEC. 34.00				
19) Pl. SEC. 34.00				
20) Pl. SEC. 34.00				
21) Pl. SEC. 34.00				
22) Pl. SEC. 34.00				
23) Pl. SEC. 34.00				
24) Pl. SEC. 34.00				
25) Pl. SEC. 34.00				
26) Pl. SEC. 34.00				
27) Pl. SEC. 34.00				
28) Pl. SEC. 34.00				
29) Pl. SEC. 34.00				
30) Pl. SEC. 34.00				
31) Pl. SEC. 34.00				
32) Pl. SEC. 34.00				
33) Pl. SEC. 34.00				
34) Pl. SEC. 34.00				
35) Pl. SEC. 34.00				
36) Pl. SEC. 34.00				
37) Pl. SEC. 34.00				
38) Pl. SEC. 34.00				
39) Pl. SEC. 34.00				
40) Pl. SEC. 34.00				
41) Pl. SEC. 34.00				
42) Pl. SEC. 34.00				
43) Pl. SEC. 34.00				
44) Pl. SEC. 34.00				
45) Pl. SEC. 34.00				
46) Pl. SEC. 34.00				
47) Pl. SEC. 34.00				
48) Pl. SEC. 34.00				
49) Pl. SEC. 34.00				
50) Pl. SEC. 34.00				
51) Pl. SEC. 34.00				
52) Pl. SEC. 34.00				
53) Pl. SEC. 34.00				
54) Pl. SEC. 34.00				
55) Pl. SEC. 34.00				
56) Pl. SEC. 34.00				
57) Pl. SEC. 34.00				
58) Pl. SEC. 34.00				
59) Pl. SEC. 34.00				
60) Pl. SEC. 34.00				
61) Pl. SEC. 34.00				
62) Pl. SEC. 34.00				
63) Pl. SEC. 34.00				
64) Pl. SEC. 34.00				
65) Pl. SEC. 34.00				
66) Pl. SEC. 34.00				
67) Pl. SEC. 34.00				
68) Pl. SEC. 34.00				
69) Pl. SEC. 34.00				
70) Pl. SEC. 34.00				
71) Pl. SEC. 34.00				
72) Pl. SEC. 34.00				
73) Pl. SEC. 34.00				
74) Pl. SEC. 34.00				
75) Pl. SEC. 34.00				
76) Pl. SEC. 34.00				
77) Pl. SEC. 34.00				
78) Pl. SEC. 34.00				
79) Pl. SEC. 34.00				
80) Pl. SEC. 34.00				
81) Pl. SEC. 34.00				
82) Pl. SEC. 34.00				
83) Pl. SEC. 34.00				
84) Pl. SEC. 34.00				
85) Pl. SEC. 34.00				
86) Pl. SEC. 34.00				
87) Pl. SEC. 34.00				
88) Pl. SEC. 34.00				
89) Pl. SEC. 34.00				
90) Pl. SEC. 34.00				
91) Pl. SEC. 34.00				
92) Pl. SEC. 34.00				
93) Pl. SEC. 34.00				
94) Pl. SEC. 34.00				
95) Pl. SEC. 34.00				
96) Pl. SEC. 34.00				
97) Pl. SEC. 34.00				
98) Pl. SEC. 34.00				
99) Pl. SEC. 34.00				
100) Pl. SEC. 34.00				

INSTRUCTIONS FOR CA-5D12
CRIMPER, HAND, MACHINED CONTACTS

SIZE: 10K44
SCALE: NONE
S2-15219
SHEET: 1 OF 1

REVISIONS
DATE
BY
APPR

DATE: 6/12/09
BY: B.D.B.
APPR: M.R.F.



REVISONS		DESCRIPTION	DATE	BY	APPR
REV	ZONE	ECO	RELEASE NUMBER	B.D.B.	M.R.F.
A1	-	-	016571	6/12/09	

CONTACT P/N	SIZE TYPE	WIRE SIZE	REF. ONLY TENSILE LBS[N]
AT60-202-16XX	16PIN	1.5mm ² 16AWG	35[156]
AT62-201-16XX	16SOC	1.0mm ² 18AWG 0.75mm ² 20AWG	25[111]
		0.50mm ²	20[89]

RECOMMENDED STRIP LENGTH	
CONTACT SIZE	STRIP LENGTH INCH[MM]
16	0.250-0.312[6.35-7.92]

CRIMP TOOLING						
CONTACT SIZE	CRIMP TOOL PART NUMBER	CONTACT LOCATOR "TURRET" POSITION	WIRE SELECTOR NUMBER	GO GAGE INCH[MM]	"NOGO" GAGE INCH[MM]	REMARKS
16	CA-5D12 CA-5E12	BLUE	6	0.052[1.32]	0.057[1.45]	
16	CA-5D12 CA-5E12	BLUE	4	0.039[.991]	0.044[1.12]	SIZE 16 WITH 20 AWG WIRE

- NOTES: UNLESS OTHERWISE SPECIFIED
- 1. MINIMUM +/-0.0005 [0.013] TOLERANCE STEEL GAGE PINS. DO NOT CRIMP GAGE PINS. CLOSE DIE, THEN USE GAGE PINS.
 - 2. WHEN XX=31, CONTACT PLATING IS GOLD WHEN XX=141, CONTACT PLATING IS NICKEL
 - 3. PULL RATE OF 1.0 IN [25.4] PER MINUTE. ACTUAL STRENGTH DEPENDS ON WIRE SIZE.
 - 4. FOR CONTACT PERFORMANCE, MATERIAL SPECIFICATIONS AND APPLICATION DETAILS, SEE DRAWING S2-15217.
 - 5. CONDUCTOR STRANDS MUST BE VISIBLE THRU THE INSPECTION HOLE PRIOR TO CRIMP.
 - 6. PROPER CRIMP TOOLING WILL PRODUCE A CRIMP CENTERED BETWEEN THE INSPECTION HOLE AND CRIMP BARREL END.
 - 7. WIRE SIZES PER SAE J1128 AND J1560 [DIN 72551-6] REFERENCE INSTRUCTION MANUALS S2-15219 AND S2-15220 FOR CA-5D12 AND CA-5E12 HAND AND PNEUMATIC CRIMPER.
 - 8. THE CRIMP HEIGHT DIMENSION AFTER CRIMPING MAY VARY FROM THE VALUES LISTED FOR THE "GO-NOGO" PINS.

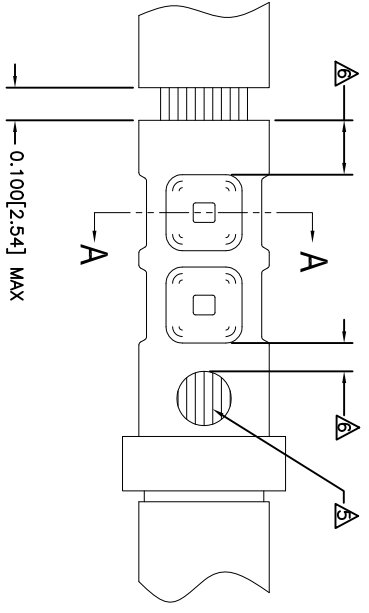

SECTION A-A
CRIMP CROSS-SECTION

QUANTITY	PART NUMBER	DESCRIPTION	ITEM
UNLESS OTHERWISE SPECIFIED			
1	BERNIM	6/3/09	
2	BERNIM	6/3/09	
3	BERNIM	6/3/09	
4	BERNIM	6/3/09	
MATERIAL SPECIFICATIONS:			
MA			
PROCESS SPECIFICATIONS:			
NEXT ASSY:			
SIGNATURES		DATE	
DESIGNER:	BERNIM	6/3/09	
CHECKER:	BERNIM	6/3/09	
ENGINEER:	BERNIM	6/3/09	
APPROVAL:	BERNIM	6/3/09	
CUSTOMER:		DATE	
MA			
THE USE OF THIS DRAWING IS LIMITED TO THE SPECIFIC APPLICATIONS, AND PERFORMANCE SPECIFICATIONS, AND PERFORMANCE PRESENTED HEREON. ANY OTHER USE WITHOUT THE WRITTEN PERMISSION OF AMPHENOL CORP. ALL DIMENSIONS ARE IN UNLESS OTHERWISE SPECIFIED. DRAWINGS REFERENCED HEREON MAY CONTAIN LIMITED RIGHTS DATA.			
SIZE	SCALE	PROJ	SCALE
C	10X44	C	10X44
CRIMP INFORMATION		S2-15218	
SOLID MACHINED CONTACTS		SHEET 1 OF 1	
REVISION		A1	

MATERIALS LIST		DESCRIPTION	ITEM
SINE Systems Corporation			
A Subsidiary of Amphenol Corporation			
44724 Moley Drive			
Clinton Township, MI 48036			
CRIMP INFORMATION		S2-15218	
SOLID MACHINED CONTACTS		SHEET 1 OF 1	
REVISION		A1	

REVOLUTIONS		DESCRIPTION	DATE	BY	APPR
REV	ZONE	ECO	6/12/08	B.D.B.	M.R.F.
AT	-	-	RELEASE NUMBER 016871		

SOLID CONTACT SIZE	SOLID CONTACT PART NUMBERS		WIRE SIZE AVG (mm ²)	RECOMMENDED STRIP LENGTH INCH (mm)	MIN CONTACT RETENTION LBS (N)	REF CRIMP TENSILE LBS (N)	MAX RATED AMPS @ 125°C CONTINUOUS
	PN	SOCKET					
16	AT60-202-16**	AT62-201-16**	16-20 [1.5-0.5]	0.25-0.31 [6.35-7.92]	25 [1111]	35-20 [156-89]	13

S&P CONTACT SIZE	STAMPED CONTACT PART NUMBERS		WIRE SIZE AVG (mm ²)	WIRE INSULATION O.D. RANGE	RECOMMENDED STRIP LENGTH INCH (mm)	MIN CONTACT RETENTION LBS (N)	REF CRIMP TENSILE LBS (N)	MAX RATED AMPS @ 125°C CONTINUOUS
	PN	SOCKET						
16	AT60-14-01**	AT62-14-01**	14-16 [2.0-1.0]	.100 - .150 [2.54 - 3.81]	0.150-0.200 [3.81-5.08]	25 [1111]	25 [1111]	13
16	AT60-16-01**	AT62-16-01**	16-18 [1.0-0.75]	.075 - .100 [1.90 - 2.54]	0.150-0.200 [3.81-5.08]	25 [1111]	25 [1111]	13
16	AT60-16-06**	AT62-16-06**	18-20 [0.75-0.50]	.055 - .095 [1.40 - 2.41]	0.150-0.200 [3.81-5.08]	25 [1111]	25-15 [111+67]	13

CONTACT RESISTANCE STRENGTH (LESS DROP THROUGH WIRE)			
WIRE AWG	TEST CURRENT	MILLIVOLT DROP SOLID	MILLIVOLT DROP S&P
14	18	60	100
16	13	60	100
18	10	60	100
20	7.5	60	100

MATERIAL SPECIFICATION AND PLATING ** CODES	
PN: COPPER ALLOY	SOLID MACHINED CONTACT PLATING OPTIONS: Δ
SOCKET: COPPER ALLOY WITH STAINLESS STEEL SLEEVE	3I= GOLD*
	14I= NICKEL
	STAMPED CONTACT PLATING OPTIONS: Δ
	22= NICKEL
	44= GOLD*
	89= SELECTIVE GOLD*

NOTES: UNLESS OTHERWISE SPECIFIED

1. ALL DIMENSIONS ARE INCHES(MM).
2. ALL FORCES ARE IN LBS(POUNDS) AND "N" (NEWTONS).
3. CONTACT RETENTION TEST PULL RATE SHALL BE 1.0 INCH/2S. 4) PER MINUTE MAXIMUM. WIRE SIZE WILL AFFECT THE TRUE STRENGTH OF THE CRIMP.
4. WIRE SIZES AND INSULATION RANGES ARE FOR REFERENCE ONLY. THE ACTUAL INSULATION RANGE DEPENDS ON CONNECTOR GROMMET SEALING SIZE.

SEE SPECIFICATIONS LISTED BELOW FOR INDIVIDUAL CRIMP INFORMATION:

"SOLID" CONTACTS	SIZE	"STAMPED" CONTACTS	SIZE
	S2-15218	S2-15222	16
		S2-15221	16/20

- Δ MAXIMUM RATED CURRENT IN CHART DEPENDS ON CONTACT SIZE. ACTUAL RATED CURRENT DEPENDS ON WIRE SIZE.
- Δ CONTACT FACTORY FOR ALL AVAILABLE PLATING ON SPECIFIC CONTACTS.
- Δ AMPHENOL SINE PERFORMANCE SPECIFICATIONS REQUIRE THE USE OF AMPHENOL SINE APPROVED TOOLING.

QUANTITY		PART NUMBER		DESCRIPTION		ITEM
UNLESS OTHERWISE SPECIFIED						
1) All dimensions are in inches.	SIGNATURES	DATE	MATERIALS LIST			
2) Pl. SEC 30.00	DATE	4/5/09	SINE Systems Corporation			
3) Pl. SEC 30.00	ORDER	6/3/09	A Subsidiary of Amphenol Corporation			
4) Fabrication Standards Per:	ENGINEER	BERNIE	44724 Moley Drive			
5) Pl. SEC 30.00	APPROVAL	6/3/09	Carlton Township, MI 48036			
6) Pl. SEC 30.00	CUSTOMER		GENERAL DATA, CONTACTS			
7) Pl. SEC 30.00	APPROVAL		STAMPED AND FORMED / MACHINED			
8) Pl. SEC 30.00	DATE		SIZE (PICK NUMBER) S2-15217			
9) Pl. SEC 30.00	SCALE		NONE			
10) Pl. SEC 30.00	REVISION		A1			



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.