

Type MMWA, Polyester Film Capacitors

Metallized Axial Leads



High Capacitance, High Voltage

Type MMWA axial-leaded, metallized polyester film capacitors incorporate compact, non-inductive extended windings with epoxy end seals to offer excellent moisture resistance and capacitance stability over the operating temperature range. Metallized polyester provides self-healing characteristics that help prevent permanent shorting due to high voltage transients.


Specifications

Voltage Range: 50-1,000 Vdc
Capacitance Range: .01-10 μ F
Capacitance Tolerance: $\pm 10\%$ (K) standard
 $\pm 5\%$ (J) optional

Operating Temperature Range: -55°C to 125°C*
 *Full-rated voltage at 85°C—Derate linearly to 50%-rated voltage at 125°C

Dielectric Strength: 200% (1 minute)
Dissipation Factor: .75% Max. (25°C, 1 kHz)
Insulation Resistance: 10,000 M Ω x μ F
 30,000 M Ω Min.

Life Test: 1000 Hours at 85°C at 125% Rated Voltage

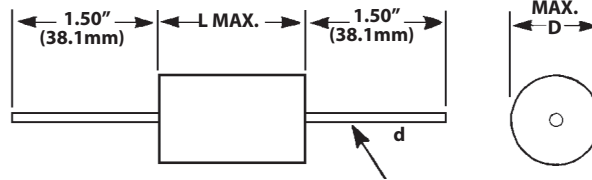

TINNED COPPER-CLAD STEEL LEADS

NOTE: Other capacitance values, sizes and performance specifications are available. Contact us.



Complies with the EU Directive 2002/95/EC requirement restricting the use of Lead (Pb), Mercury (Hg), Cadmium (Cd), Hexavalent chromium (Cr(VI)), PolyBrominated Biphenyls (PBB) and PolyBrominated Diphenyl Ethers (PBDE).

Ratings and Dimensions

Normally Stocked

Cap. (μ F)	Catalog Part Number	D Inches (mm)	L Inches (mm)	d Inches (mm)	dV/dt V/ μ s
50 Vdc					
0.100	MMWA05P1K-F	0.220 (5.6)	0.562 (14.3)	0.020 (0.5)	36
0.150	MMWA05P15K-F	0.210 (5.3)	0.687 (17.4)	0.020 (0.5)	20
0.220	MMWA05P22K-F	0.240 (6.1)	0.687 (17.4)	0.020 (0.5)	20
0.330	MMWA05P33K-F	0.280 (7.1)	0.687 (17.4)	0.024 (0.6)	20
0.470	MMWA05P47K-F	0.320 (8.1)	0.687 (17.4)	0.024 (0.6)	20
0.680	MMWA05P68K-F	0.290 (7.4)	1.000 (25.4)	0.024 (0.6)	9
1.000	MMWA05W1K-F	0.335 (8.5)	1.000 (25.4)	0.024 (0.6)	9
1.500	MMWA05W1P5K-F	0.355 (9.0)	1.250 (31.7)	0.024 (0.6)	9
2.000	MMWA05W2K-F	0.400 (10.2)	1.250 (31.7)	0.024 (0.6)	9
3.000	MMWA05W3K-F	0.475 (12.1)	1.250 (31.7)	0.024 (0.6)	9
4.000	MMWA05W4K-F	0.505 (12.8)	1.375 (34.9)	0.024 (0.6)	5
5.000	MMWA05W5K-F	0.525 (13.3)	1.500 (38.1)	0.024 (0.6)	4
6.000	MMWA05W6K-F	0.585 (14.9)	1.500 (38.1)	0.032 (0.8)	4
7.000	MMWA05W7K-F	0.625 (15.9)	1.500 (38.1)	0.032 (0.8)	4
8.000	MMWA05W8K-F	0.669 (17.0)	1.500 (38.1)	0.040 (1.0)	4
9.000	MMWA05W9K-F	0.700 (17.8)	1.500 (38.1)	0.040 (1.0)	4
10.000	MMWA05W10K-F	0.670 (17.0)	1.750 (44.4)	0.040 (1.0)	4

Cap. (μ F)	Catalog Part Number	D Inches (mm)	L Inches (mm)	d Inches (mm)	dV/dt V/ μ s
100 Vdc					
0.010	MMWA1S1K-F	0.197 (5.0)	0.562 (14.3)	0.020 (0.5)	36
0.015	MMWA1S15K-F	0.197 (5.0)	0.562 (14.3)	0.020 (0.5)	36
0.022	MMWA1S22K-F	0.197 (5.0)	0.562 (14.3)	0.020 (0.5)	36
0.033	MMWA1S33K-F	0.197 (5.0)	0.562 (14.3)	0.020 (0.5)	36
0.047	MMWA1S47K-F	0.217 (5.5)	0.562 (14.3)	0.020 (0.5)	36
0.068	MMWA1S68K-F	0.217 (5.5)	0.562 (14.3)	0.020 (0.5)	36
0.100	MMWA1P1K-F	0.236 (6.0)	0.562 (14.3)	0.020 (0.5)	36
0.150	MMWA1P15K-F	0.236 (6.0)	0.687 (17.4)	0.020 (0.5)	20
0.220	MMWA1P22K-F	0.256 (6.5)	0.687 (17.4)	0.020 (0.5)	20
0.330	MMWA1P33K-F	0.295 (7.5)	0.687 (17.4)	0.024 (0.6)	20
0.470	MMWA1P47K-F	0.320 (8.1)	0.687 (17.4)	0.024 (0.6)	20
0.680	MMWA1P68K-F	0.320 (8.1)	1.000 (25.4)	0.024 (0.6)	9
1.000	MMWA1W1K-F	0.374 (9.5)	1.000 (25.4)	0.024 (0.6)	9
1.500	MMWA1W1P5K-F	0.374 (9.5)	1.250 (31.7)	0.024 (0.6)	9
2.000	MMWA1W2K-F	0.400 (10.2)	1.250 (31.7)	0.024 (0.6)	9
3.000	MMWA1W3K-F	0.475 (12.1)	1.250 (31.7)	0.024 (0.6)	9
4.000	MMWA1W4K-F	0.505 (12.8)	1.375 (34.9)	0.032 (0.8)	5

Type MMWA, Polyester Film Capacitors

Cap. (μ F)	Catalog Part Number	D Inches (mm)	L Inches (mm)	d Inches (mm)	dV/dt V/ μ s	Cap. (μ F)	Catalog Part Number	D Inches (mm)	L Inches (mm)	d Inches (mm)	dV/dt V/ μ s
5.000	MMWA1W5K-F	0.525 (13.3)	1.500 (38.1)	0.032 (0.8)	4	0.680	MMWA4P68K-F	0.433 (11.0)	1.500 (38.1)	0.024 (0.6)	10
6.000	MMWA1W6K-F	0.585 (14.9)	1.500 (38.1)	0.032 (0.8)	4	1.000	MMWA4W1K-F	0.470 (11.9)	1.750 (44.4)	0.024 (0.6)	8
7.000	MMWA1W7K-F	0.625 (15.9)	1.500 (38.1)	0.032 (0.8)	4	1.500	MMWA4W1P5K-F	0.570 (14.5)	1.750 (44.4)	0.032 (0.8)	8
8.000	MMWA1W8K-F	0.669 (17.0)	1.500 (38.1)	0.040 (1.0)	4	2.000	MMWA4W2K-F	0.669 (17.0)	1.750 (44.4)	0.040 (1.0)	8
9.000	MMWA1W9K-F	0.700 (17.8)	1.500 (38.1)	0.040 (1.0)	4	3.000	MMWA4W3K-F	0.695 (17.6)	2.125 (54.0)	0.040 (1.0)	6
10.000	MMWA1W10K-F	0.768 (19.5)	1.750 (44.4)	0.040 (1.0)	3	3.500	MMWA4W3P5K-F	0.745 (18.9)	2.125 (54.0)	0.040 (1.0)	6
200/250 Vdc						4.000	MMWA4W4K-F	0.790 (20.1)	2.125 (54.0)	0.040 (1.0)	6
0.010	MMWA2S1K-F	0.197 (5.0)	0.562 (14.3)	0.020 (0.5)	52	5.000	MMWA4W5K-F	0.870 (22.1)	2.125 (54.0)	0.040 (1.0)	6
0.015	MMWA2S15K-F	0.197 (5.0)	0.562 (14.3)	0.020 (0.5)	52	600/630 Vdc					
0.022	MMWA2S22K-F	0.197 (5.0)	0.562 (14.3)	0.020 (0.5)	52	0.010	MMWA6S1K-F	0.217 (5.5)	0.687 (17.4)	0.020 (0.5)	69
0.033	MMWA2S33K-F	0.197 (5.0)	0.562 (14.3)	0.020 (0.5)	52	0.015	MMWA6S15K-F	0.236 (6.0)	0.687 (17.4)	0.020 (0.5)	69
0.047	MMWA2S47K-F	0.217 (5.5)	0.562 (14.3)	0.020 (0.5)	52	0.022	MMWA6S22K-F	0.276 (7.0)	0.750 (19.0)	0.020 (0.5)	69
0.068	MMWA2S68K-F	0.200 (5.1)	0.687 (17.4)	0.020 (0.5)	29	0.033	MMWA6S33K-F	0.270 (6.9)	0.750 (19.0)	0.024 (0.6)	69
0.100	MMWA2P1K-F	0.240 (6.1)	0.687 (17.4)	0.020 (0.5)	29	0.047	MMWA6S47K-F	0.305 (7.7)	0.750 (19.0)	0.024 (0.6)	69
0.150	MMWA2P15K-F	0.276 (7.0)	0.687 (17.4)	0.024 (0.6)	29	0.068	MMWA6S68K-F	0.335 (8.5)	1.000 (25.4)	0.024 (0.6)	32
0.220	MMWA2P22K-F	0.310 (7.9)	0.687 (17.4)	0.024 (0.6)	29	0.100	MMWA6P1K-F	0.374 (9.5)	1.000 (25.4)	0.024 (0.6)	32
0.330	MMWA2P33K-F	0.365 (9.3)	0.728 (18.5)	0.024 (0.6)	29	0.150	MMWA6P15K-F	0.413 (10.5)	1.187 (30.1)	0.024 (0.6)	32
0.470	MMWA2P47K-F	0.374 (9.5)	1.000 (25.4)	0.024 (0.6)	14	0.220	MMWA6P22K-F	0.430 (10.9)	1.250 (31.7)	0.024 (0.6)	32
0.680	MMWA2P68K-F	0.365 (9.3)	1.000 (25.4)	0.024 (0.6)	14	0.330	MMWA6P33K-F	0.480 (12.2)	1.250 (31.7)	0.024 (0.6)	32
1.000	MMWA2W1K-F	0.430 (10.9)	1.062 (27.0)	0.024 (0.6)	14	0.470	MMWA6P47K-F	0.470 (11.9)	1.750 (44.4)	0.024 (0.6)	12
1.500	MMWA2W1P5K-F	0.465 (11.8)	1.250 (31.7)	0.024 (0.6)	14	0.680	MMWA6P68K-F	0.570 (14.5)	1.750 (44.4)	0.032 (0.8)	12
2.000	MMWA2W2K-F	0.525 (13.3)	1.250 (31.7)	0.032 (0.8)	14	1.000	MMWA6W1K-F	0.685 (17.4)	1.750 (44.4)	0.040 (1.0)	12
3.000	MMWA2W3K-F	0.555 (14.1)	1.500 (38.1)	0.032 (0.8)	6	2.000	MMWA6W2K-F	0.805 (20.4)	2.250 (57.1)	0.040 (1.0)	10
3.500	MMWA2W3P5K-F	0.610 (15.5)	1.500 (38.1)	0.032 (0.8)	6	3.000	MMWA6W3K-F	0.945 (24.0)	2.250 (57.1)	0.040 (1.0)	10
4.000	MMWA2W4K-F	0.590 (15.0)	1.750 (44.4)	0.032 (0.8)	5	1000 Vdc					
5.000	MMWA2W5K-F	0.669 (17.0)	1.750 (44.4)	0.040 (1.0)	5	0.010	MMWA10S1K-F	0.240 (6.1)	0.875 (22.2)	0.020 (0.5)	220
6.000	MMWA2W6K-F	0.705 (17.9)	1.750 (44.4)	0.040 (1.0)	5	0.015	MMWA10S15K-F	0.275 (7.0)	0.875 (22.2)	0.024 (0.6)	220
400 Vdc						0.022	MMWA10S22K-F	0.320 (8.1)	0.875 (22.2)	0.024 (0.6)	220
0.010	MMWA4S1K-F	0.217 (5.5)	0.562 (14.3)	0.020 (0.5)	82	0.033	MMWA10S33K-F	0.380 (9.6)	0.875 (22.2)	0.024 (0.6)	220
0.015	MMWA4S15K-F	0.217 (5.5)	0.562 (14.3)	0.020 (0.5)	82	0.047	MMWA10S47K-F	0.335 (8.5)	1.062 (27.0)	0.024 (0.6)	120
0.022	MMWA4S22K-F	0.236 (6.0)	0.562 (14.3)	0.020 (0.5)	82	0.068	MMWA10S68K-F	0.410 (10.4)	1.125 (28.6)	0.024 (0.6)	120
0.033	MMWA4S33K-F	0.220 (5.6)	0.687 (17.4)	0.020 (0.5)	46	0.100	MMWA10P1K-F	0.485 (12.3)	1.125 (28.6)	0.024 (0.6)	120
0.047	MMWA4S47K-F	0.276 (7.0)	0.687 (17.4)	0.020 (0.5)	46	0.150	MMWA10P15K-F	0.595 (15.1)	1.125 (28.6)	0.032 (0.8)	120
0.068	MMWA4S68K-F	0.280 (7.1)	0.687 (17.4)	0.024 (0.6)	46	0.220	MMWA10P22K-F	0.605 (15.4)	1.312 (33.3)	0.032 (0.8)	85
0.100	MMWA4P1K-F	0.320 (8.1)	0.687 (17.4)	0.024 (0.6)	46	0.330	MMWA10P33K-F	0.640 (16.3)	1.500 (38.1)	0.032 (0.8)	50
0.150	MMWA4P15K-F	0.290 (7.4)	1.000 (25.4)	0.024 (0.6)	22	0.470	MMWA10P47K-F	0.750 (19.0)	1.500 (38.1)	0.040 (1.0)	50
0.220	MMWA4P22K-F	0.335 (8.5)	1.000 (25.4)	0.024 (0.6)	22	0.680	MMWA10P68K-F	0.810 (20.6)	1.750 (44.4)	0.040 (1.0)	45
0.330	MMWA4P33K-F	0.394 (10.0)	1.187 (30.1)	0.024 (0.6)	22	1.000	MMWA10W1K-F	0.880 (22.3)	1.937 (49.2)	0.040 (1.0)	40
0.470	MMWA4P47K-F	0.433 (11.0)	1.187 (30.1)	0.024 (0.6)	22						



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.