

Key Switches, Medium Security

MATERIAL SPECIFICATIONS

ContactsSilver
 Cylinder Material.....Zinc alloy
 Lock BodyZinc alloy
 Key MaterialBrass
 Terminals/Fixed ContactsScrew type
 Beveled Frame Finish302 Stainless steel

TYPICAL PERFORMANCE CHARACTERISTICS

Contact Rating1A at 120 VAC resistive
 Initial Contact Resistance50 Milliohms max.
 Contact Timing.....Non-shorting
 Plunger/Actuator Travel90°
 Key Changes25 Standard
 Life ExpectancyUp to 10,000 Cycles

ENVIRONMENTAL SPECIFICATIONS

Solder Heat ResistanceSee page M3-4





NOTE: All Keylocks are supplied with 2 brass keys on a ring.

SPST

5 Disc Tumblers



2SWK131



| Part Number | | | | | | Part Number | | | | | |
|------------------|--------------|------|--------|--------|-----------------|------------------|--------------|--|--------|--------|------------|
| Tyco Electronics | Alcoswitch | Type | Pos. 1 | Pos. 2 | Remove Key | Tyco Electronics | Alcoswitch | Type | Pos. 1 | Pos. 2 | Remove Key |
| 1-1437597-7 | 2SWK131AL101 | SPST | Off | On | Position 1 | 2-1437597-7 | 2SWK231AL101 | SPST | Off | (On) | Position 1 |
| 2-1437597-3 | 2SWK132AL101 | SPST | Off | On | Position 1 or 2 | 4-1437597-3 | SWK1323AL101 | Spare Key for SWK Series (On) indicates momentary position. | | | |

2 Position Key Switch

MATERIAL SPECIFICATIONS

Contacts Gold or silver plate
 Cylinder Material Zinc alloy
 Lock Body Zinc alloy
 Key Material Brass
 Terminals/Fixed Contacts Tin lead plate
 Terminal Seal SP epoxy

TYPICAL PERFORMANCE CHARACTERISTICS


Contact Rating Gold: 0.4 VA max. @ 20 VDC or peak AC
 Silver: 3A @ 125 VAC or 28 VDC resistive
 Initial Contact Resistance 20 Milliohms max.
 Contact Timing Non-shorting
 Insulation Resistance 1,000 Megohms @ 500 VDC min.
 Dielectric Strength 1,000 Volts @ sea level
 Actuator Travel 80°

ENVIRONMENTAL SPECIFICATIONS

Operating Temperature -30°C to +85°C (-22°F to +185°F)
 Storage Temperature -30°C to +85°C (-22°F to +185°F)
 Solder Heat Resistance See page M3-4

Note: All keylocks are supplied with 2 brass keys on a ring.

SPDT/DPDT
 4 Disc Tumblers

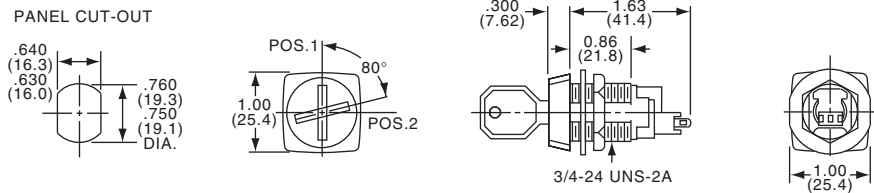

SKT131

| Tyco Electronics | Alcoswitch | Type | Ⓜ | Ⓟ | Remove Key | Contacts |
|------------------|--------------|----------------------------|----|----|------------|----------|
| 1437598-4 | SKT131AEL01 | SPDT | On | On | 1 Only | Silver |
| 1437598-5 | SKT131GAEL01 | SPDT | On | On | 1 Only | Gold |
| 1437598-7 | SKT132AEL01 | SPDT | On | On | 1 or 2 | Silver |
| 1437598-8 | SKT132GAEL01 | SPDT | On | On | 1 or 2 | Gold |
| 1437598-9 | SKT331AEL01 | DPDT | On | On | 1 Only | Silver |
| 1-1437598-0 | SKT331GAEL01 | DPDT | On | On | 1 Only | Gold |
| 1-1437598-1 | SKT332AEL01 | DPDT | On | On | 1 or 2 | Silver |
| 1-1437598-3 | SKT332GAEL01 | DPDT | On | On | 1 or 2 | Gold |
| 3-1437598-4 | SK1323AEL01 | Spare key for SKT13 Series | | | | |

Medium Security Key Switch

MATERIAL SPECIFICATIONS

ContactsSilver
 Cylinder MaterialZinc alloy
 Lock BodyZinc alloy
 Key MaterialBrass
 Terminals/Fixed Contacts ...Screw type
 Beveled Frame FinishBrushed chrome

TYPICAL PERFORMANCE CHARACTERISTICS

Contact Rating1 A @ 120 VAC resistive
 Initial Contact Resistance ...50 Milliohms max.
 Contact TimingNon-shorting
 Actuator Travel90°
 Key Changes10 Standard
 Life ExpectancyUp to 10,000 Cycles

ENVIRONMENTAL SPECIFICATIONS

Operating Temperature-22°F + 185° F (-30°C to +85°C)
 Storage Temperature-22°F + 185° F (-30°C to +85°C)
 Solder Heat ResistanceSee page M3-4


NOTE: All Keylocks are supplied with 2 brass keys on a ring.

SPST



4 Disc Tumblers



SKF131

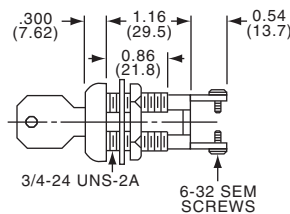

PANEL CUT-OUT



| Tyco Electronics | Alcoswitch | Type | Pos. 1 | Pos. 2 | Remove Key | Tyco Electronics | Alcoswitch | Type | Pos. 1 | Pos. 2 | Remove Key |
|------------------|--------------|------|--------|--------|-----------------|------------------|--------------|------------------------------------|--------|--------|------------|
| 1437597-1 | 2SKF131AEL01 | SPST | Off | On | Position 1 | 1-1437597-1 | 2SKF231AEL01 | SPST | Off | (On) | Position 1 |
| 1437597-7 | 2SKF132AEL01 | SPST | Off | On | Position 1 or 2 | 3-1437597-4 | SK1323AEL01 | Spare key for SK Series | | | |
| 1-1437597-0 | 2SKF133AEL01 | SPST | On | Off | Position 1 | | | (On) indicates momentary position. | | | |

H

SKF Series

High Security Key Switch

MATERIAL SPECIFICATIONS

ContactsSilver
 Cylinder MaterialZinc alloy
 Lock BodyZinc alloy
 Actuator MaterialBrass key
 Terminals/Fixed Contacts.....Screw type
 Beveled Frame FinishPolished chrome

ENVIRONMENTAL SPECIFICATIONS


Operating Temperature.....-22°F to +185° (-30°C to +85°C)
 Storage Temperature-22°F to +185° (-30°C to +85°C)
 Solder Heat Resistance.....See page M3-4

TYPICAL PERFORMANCE CHARACTERISTICS

Contact Rating5A @ 115 VAC, 15A @ 24 VDC
 resistive
 Initial Contact Resistance ...50 Milliohms max.
 Contact TimingNon-shorting
 Dielectric Strength1,000 VAC @ sea level
 Actuator Travel90°
 Key Changes25 Standard
 Life ExpectancyUp to 20,000 Cycles

NOTE: All Keylocks are supplied with 2 brass keys on a ring.

SPST
8 Disc Tumblers

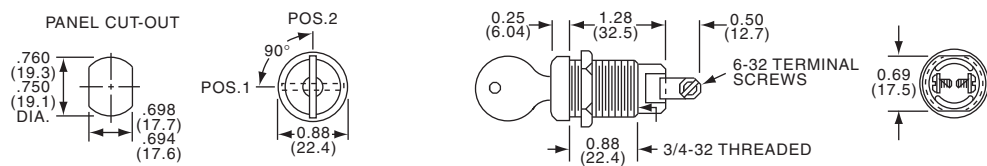

SWK12

| Tyco Electronics | Alcoswitch | Type | Pos. 1 | Pos. 2 | Remove Key |
|------------------|------------|----------------------------|--------|--------|-----------------|
| 4-1437597-0 | SWK12F315 | SPST | On | Off | Position 1 or 2 |
| 3-1437597-6 | SWK121F315 | SPST | On | Off | Position 2 |
| 3-1437597-8 | SWK123F315 | SPST | On | Off | Position 1 |
| 4-1437597-2 | SWK12KF315 | Spare key for SWK12 Series | | | |



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.