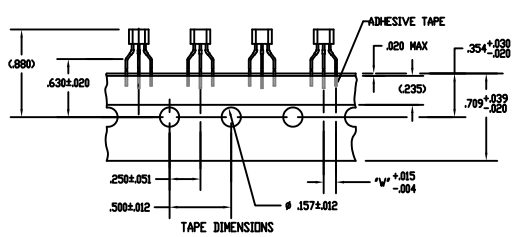

TAPE DIMENSIONS

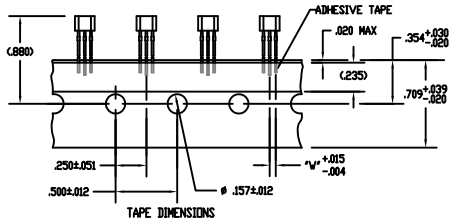

TAPE DIMENSIONS

TAPE PACKING OPTIONS

TAPE STYLE

AMMOPACK STYLE "T2" 12 14



AMMOPACK STYLE "T3" 12 14



NOTES

1. CENTERLINE OF HALL CELL
2. THE + MAGNETIC FLUX IS IN THE DIRECTION SHOWN (THIS ASSUMES THE CONVENTION THAT THE DIRECTION OF THE EXTERNAL FLUX OF A MAGNET IS FROM THE NORTH TO THE SOUTH POLE OF THE MAGNET)
3 - THE DEVICE CANNOT BE DAMAGED BY MAGNETIC OVERDRIVE
4 - OUTPUT TYPE - RATIOMETRIC
5 - LEADS MUST BE ADEQUATELY SUPPORTED DURING ANY FORMING/SHEERING OPERATION TO ASSURE THAT THE LEADS ARE NOT STRESSED WITHIN THE PLASTIC
6 - PCB WAVE SOLDERING GUIDELINES ARE AS FOLLOWS:
250°C TO 260°C SOLDERING TEMPERATURE 3 SECONDS MAX SOLDERING TIME
7. BURRS ARE ALLOWED ONLY IF FULL LENGTH OF LEADS WILL PASS THROUGH ø.023 HOLE. LEAD REFERENCE DIMENSIONS DO NOT INCLUDE SOLDER THICKNESS
8. DIMENSION REFERS TO THE LOCATION OF LEAD CENTERLINES AS THE EXIT THE PLASTIC PACKAGE
9 - SOME COMBINATIONS OF BASIC LISTING AND PACKAGE OPTIONS MAY NOT BE AVAILABLE
10. ABSOLUTE MAXIMUM RATINGS ARE THE EXTREME LIMITS THE DEVICE WILL MOMENTARILY WITHSTAND WITHOUT DAMAGE TO THE DEVICE. ELECTRICAL AND MAGNETIC CHARACTERISTICS ARE NOT GUARANTEED IF THE RATED VOLTAGE AND/OR CURRENTS ARE EXCEEDED NOR WILL THE DEVICE NECESSARILY OPERATE AT ABSOLUTE MAXIMUM RATINGS
11. LEAD STRAIGHTNESS MAY BE DETERIORATED ON SOME UNITS BY BULK PACKAGING. APPLICATIONS HAVING A CRITICAL LEAD STRAIGHTNESS REQUIREMENT SHOULD USE A TAPE PACKAGING OPTION
12. AMMOPACK STYLE "T2" & "T3". 24 SWITCHES BETWEEN FOLDS, SKIP 1 SPACE AT FOLD. MAY BE REFERRED TO AS "FAN FOLD"
13. MOLDED PART DIMENSIONS DO NOT INCLUDE FLASH. FLASH IS LIMITED TO .005 MAX
14. TAPE AND AMMOPACK PER EIA-468

CATALOG LISTING	TAPE STYLE	DIM "L"	DIM "W"	COMMENTS 11
SS49E	NONE	.590	.050	BULK - 1000/BAG
SS49E-T2	T2	.590	.100	5000/BOX
SS49E-T3	T3	.590	.050	5000/BOX
SS49E-L	NONE	.735	.050	BULK - 1000/BAG
SS49E-F	NONE	.590	.100	BULK - 1000/BAG

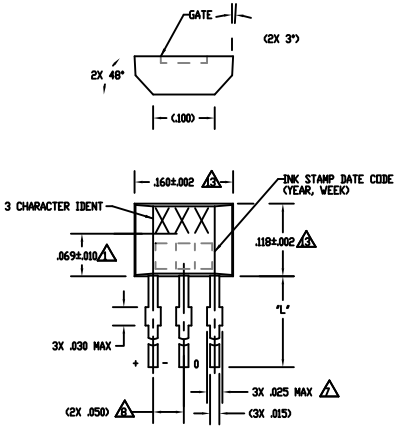

LEAD STYLES "STD", "T2", "T3"



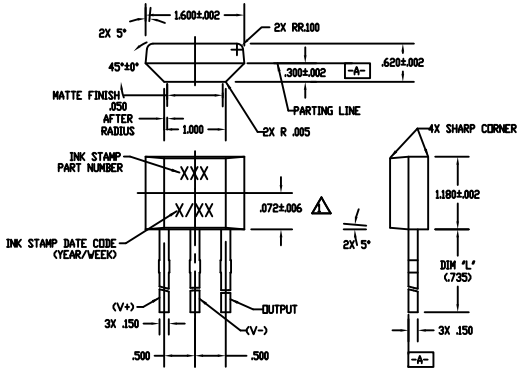

LEAD STYLES L ONLY

ESD SENSITIVITY: CLASS 3

ANSI Y14.5M-1982 APPLIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

FED. MFG. CODE NUMBER

MICROSWITCH a Honeywell Division

LINEAR HALL EFFECT SENSOR

CATALOG LISTING: SS49E SERIES CHART 1

THIRD ANGLE PROJECTION

SCALE 10 : 1

DO NOT SCALE PRINT

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE

ONE PLACE	(.0)	±.030
TWO PLACE	(.00)	±.015
THREE PLACE	(.000)	±.005
ANGLES		± 2°

WEIGHT

REVISIONS																							
ZONE	REV	DESCRIPTION																					
1	A	SAV 13 JUN 02																					
2	B	VK 2 SEP 05																					
3	C	RJA 21 JUN 10																					
4	D	GRT 13 JUN 02																					

SS49E SERIES CHART 1

SIZE M

DRAWING NUMBER 0000166

SHEET 1 OF 2

PTC/CAD 23

CHARACTERISTICS ARE AT Vs=5.00 WITH 10K OUTPUT TO MINUS
WITH TA=-40°C TO +85 °C UNLESS OTHERWISE SPECIFIED

PARAMETER	CONDITIONS	MIN	TYP	MAX	UNITS
SENSITIVITY	TA = 25°C	1.0	1.4	1.75	mV/GAUSS
NULL	TA = 25°C	2.25	2.50	2.75	VOLTS
SUPPLY CURRENT			6	10.	mA
OUTPUT CURRENT SOURCE	Vs > 3.0	1	1.5		mA
RESPONSE TIME			3		S
OUTPUT VOLTAGE SWING					
??VOM -	-B APPLIED	1.05	.95		VOLTS
??VOM +	+B APPLIED	Vs -1.05	Vs -.95		VOLTS
B LIMITS FOR LINEAR OPERATION	-B MAX	-650	-1000		GAUSS
	+B MAX	+650	+1000		GAUSS
Vnull DRIFT	B = 0, TA = -40°C TO +85°C	-.10		+.10	% / °C
SENSITIVITY DRIFT	TA = +25°C TO +125°C	-.01		+.05	% / °C
SENSITIVITY DRIFT	TA = -40°C TO +25°C	0		+.06	% / °C
SENSITIVITY DRIFT	TA = +125°C TO +150°C	-.04		+.08	% / °C
LINEARITY	B = -650 TO +650		-.7		% OF SPAN
SUPPLY VOLTAGE	-40°C TO +100°C	2.7	5.0	6.5	VOLTS
OPERATING TEMP		-40		+100	°C

BLOCK DIAGRAM CURRENT SOURCING OUTPUT

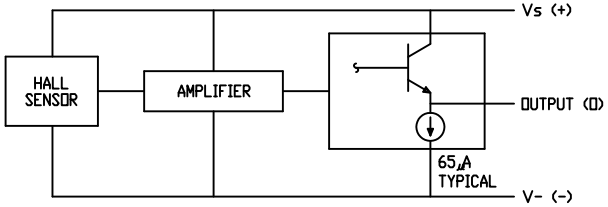

ABSOLUTE MAXIMUM CHARACTERISTICS (10)

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN	MAX	UNITS
SUPPLY VOLTAGE	Vs		-0.5	8	V
OUTPUT VOLTAGE	Vout		-0.5	8	V
OUTPUT CURRENT	Iout	SOURCE		10	mA
TEMPERATURE	TA	OPERATING	-40	100	°C
	Ts	STORAGE (Vs=0)	-55	165	°C

NULL SHIFT VERSUS TEMPERATURE

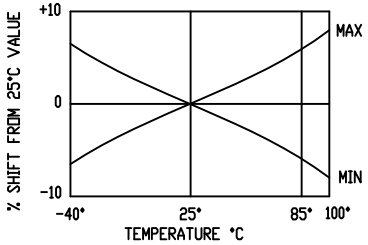

RATIO OF Vnull TO Vs

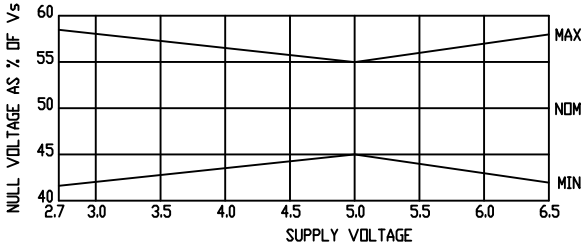

SENSITIVITY/V VERSUS Vs (mV/Gauss/Volt)

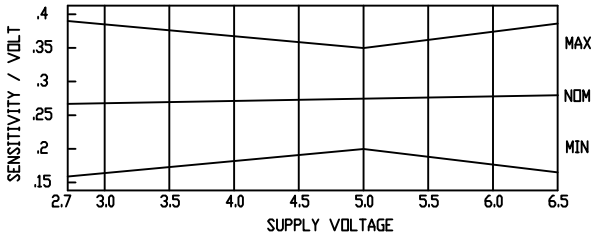

TRANSFER CHARACTERISTICS AT Vs=5.0 VDC

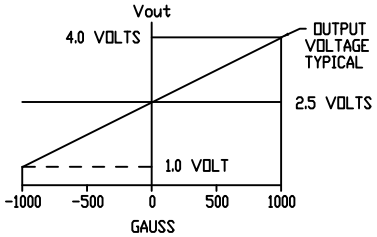

SUPPLY CURRENT VERSUS TEMPERATURE

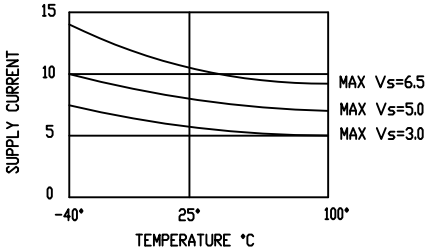

TYPICAL FREQUENCY RESPONSE

RL=10K PARALLEL WITH 100pF



SENSITIVITY SHIFT VERSUS TEMPERATURE

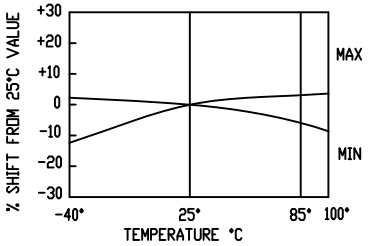

ESD SENSITIVITY CLASS 3

ANSI Y14.5M-1982 APPLIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

FSCM NO. 02866

MICROSWITCH a Honeywell Division

LINEAR HALL EFFECT SENSOR

CATALOG LISTING: SS49E SERIES CHART 1

THIRD ANGLE PROJECTION

SCALE NONE

DO NOT SCALE PRINT

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE

ONE PLACE	(.0)	±.030
TWO PLACE	(.00)	±.015
THREE PLACE	(.000)	±.005
ANGLES		±

WEIGHT

SS49E SERIES CHART 1 | 2 OF 2 | DWG NO. 0000166 | REV -

REVISIONS: 8 | 21 JUN 10 | RJK

PTC/CAD 23 | TSK 24APR03 | SAV 24 APR 03 | VK 2 SEP 05

Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits,General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.

Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)
Факс: 8 (812) 320-02-42
Электронная почта: org@eplast1.ru
Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.