



PIPE PROBE

SPECIFICATIONS

- Robust, compact design
- Improved overall reliability
- Fast response time
- Integrated clip
- Supplied with connector.
- RoHS Compliant

This probe consists of a NTC thermistor soldered to a 24 AWG Stranded TPE cable and potted in a copper housing. The assembly is over molded leaving the copper housing exposed. A metal clip is attached to the final assembly.




PERFORMANCE SPECS

Parameters	Units	Value
Resistance @ +25°C	Ohms	10,000
Tolerance from +25°C to +85°C	°C	±1
Beta Value 25/85	K	3435
Tolerance on Beta Value	%	±2
Time response on pipe surface (T63)	Seconds	~5
Temperature range	°C	-40 to +125

PIPE PROBE

MECHANICAL DETAILS

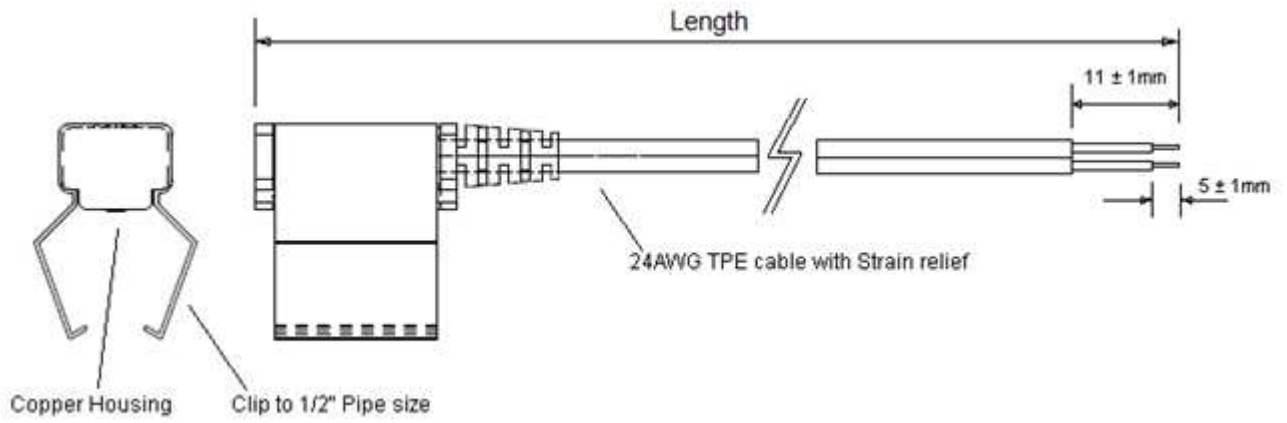

Part Number	Description	Length
10K3D1217	Pipe Probe	1M
10K3D1271	Pipe Probe	3M
10K3D1303	Pipe Probe	10M

RESISTANCE V TEMPERATURE TABLE

Temp °C	KOhms
-40	186
-39	176.4
-38	167.4
-37	158.8
-36	150.7
-35	143.1
-34	135.9
-33	129.1
-32	122.7
-31	116.6
-30	110.8
-29	105.4
-28	100.2
-27	95.37
-26	90.76
-25	86.39
-24	82.26
-23	78.35
-22	74.64
-21	71.12
-20	67.79
-19	64.63
-18	61.64
-17	58.79
-16	56.1
-15	53.53
-14	51.1
-13	48.8
-12	46.6
-11	44.52
-10	42.54
-9	40.66
-8	38.87
-7	37.17
-6	35.55
-5	34.01
-4	32.55
-3	31.15
-2	29.82
-1	28.56
0	27.35
1	26.2

Temp °C	KOhms
2	25.11
3	24.07
4	23.07
5	22.13
6	21.22
7	20.36
8	19.53
9	18.75
10	18
11	17.28
12	16.6
13	15.94
14	15.32
15	14.72
16	14.15
17	13.6
18	13.08
19	12.58
20	12.1
21	11.64
22	11.21
23	10.79
24	10.38
25	10
26	9.631
27	9.278
28	8.94
29	8.615
30	8.304
31	8.006
32	7.72
33	7.445
34	7.182
35	6.929
36	6.687
37	6.454
38	6.23
39	6.015
40	5.809
41	5.611
42	5.42
43	5.237

Temp °C	KOhms
44	5.061
45	4.891
46	4.729
47	4.572
48	4.421
49	4.276
50	4.137
51	4.003
52	3.873
53	3.749
54	3.629
55	3.513
56	3.402
57	3.295
58	3.192
59	3.092
60	2.996
61	2.903
62	2.814
63	2.728
64	2.645
65	2.565
66	2.487
67	2.413
68	2.341
69	2.271
70	2.204
71	2.139
72	2.076
73	2.016
74	1.957
75	1.901
76	1.846
77	1.794
78	1.743
79	1.693
80	1.645
81	1.599
82	1.555
83	1.511
84	1.47
85	1.429

Temp. oC	KOhms
86	1.39
87	1.352
88	1.315
89	1.28
90	1.245
91	1.212
92	1.18
93	1.149
94	1.118
95	1.089
96	1.06
97	1.033
98	1.006
99	0.9801
100	0.9549
101	0.9305
102	0.9069
103	0.8839
104	0.8616
105	0.84
106	0.819
107	0.7987
108	0.7789
109	0.7597
110	0.7411
111	0.723
112	0.7054
113	0.6883
114	0.6718
115	0.6556
116	0.64
117	0.6248
118	0.61
119	0.5956
120	0.5817
121	0.5681
122	0.5549
123	0.542
124	0.5295
125	0.5174

NORTH AMERICA

Measurement Specialties, Inc.,
a TE Connectivity Company
1711 139th Lane NW
Andover, MN 55304
Tel: +1 763 689 4870
Fax: +1 763 689 5033
customercare.ando@te.com

EUROPE

Measurement Specialties (Europe), Ltd.,
a TE Connectivity Company
Ballybrit Business Park
Galway Ireland
Tel : +353-91-753238
Fax : +353-91-770789
Email: customercare.glwy@te.com

ASIA

Measurement Specialties (China), Ltd.,
a TE Connectivity Company
No. 368 Wulian 1st Road
Gongxing Town
Shuangliu, Chengdu
Sichuan, 610200
China
Tel: +86 (0) 28 8573 9088
Fax: +86 (0) 28 8573 9070
Email: customercare.chdu@te.com

te.com/sensorsolutions

Measurement Specialties, Inc., a TE Connectivity company.

Measurement Specialties (MEAS), American Sensor Technologies (AST), TE Connectivity, TE Connectivity (logo) and EVERY CONNECTION COUNTS are trademarks. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

© 2016 TE Connectivity Ltd. family of companies All Rights Reserved.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.