



MICROWAVE CORPORATION

v05.1008



HMC346LP3 / 346LP3E


GaAs MMIC VOLTAGE-VARIABLE ATTENUATOR, DC - 14 GHz

Typical Applications

The HMC346LP3 / HMC346LP3E is ideal for:

- Basestation Infrastructure
- Fiber Optics & Broadband Telecom
- Microwave Radio & VSAT
- Military Radios, Radar, & ECM
- Test Instrumentation

Functional Diagram

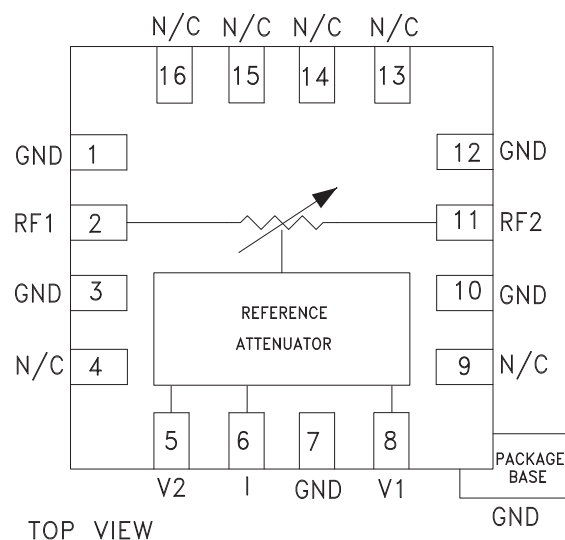

Features

- Wide Bandwidth: DC - 14 GHz
- Low Phase Shift vs. Attenuation
- 30 dB Attenuation Range
- Simplified Voltage Control
- 3 x 3 x 1 mm SMT Package


General Description

The HMC346LP3 & HMC346LP3E are pabsorp-tive Voltage Variable Attenuators (VVA) in low cost leadless surface mount plastic packages operating from DC - 14 GHz. It features an on-chip reference attenuator for use with an external op-amp to provide simple single voltage attenuation control, 0 to -3V. The device is ideal in designs where an analog DC control signal must control RF signal levels over a 30 dB amplitude range. This VVA is an excellent alternative to the HMC121C8.


Electrical Specifications, $T_A = +25^\circ \text{C}$, 50 ohm system

Parameter	Min	Typical	Max	Units
Insertion Loss				
DC - 10 GHz		1.7	2.2	dB
DC - 14 GHz		2.8	3.3	dB
Attenuation Range				
DC - 10 GHz	27	30		dB
DC - 14 GHz	22	27		dB
Return Loss				
DC - 14 GHz	5	10		dB
Switching Characteristics				
tRISE, tFALL (10/90% RF):		2		ns
tON, tOFF (50% CTL to 10/90% RF):		8		ns
Input Power for 0.25 dB Compression (0.5 - 8 GHz)				
Min. Atten:		+8		dBm
Atten. >2 dB:		-4		dBm
Input Third Order Intercept (0.5 - 8 GHz)				
Min. Atten:		+25		dBm
(Two-tone Input Power = -8 dBm Each Tone)		+10		dBm


Insertion Loss vs. Temperature

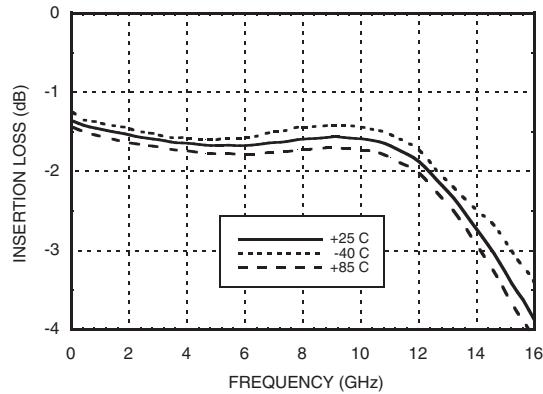


Relative Attenuation

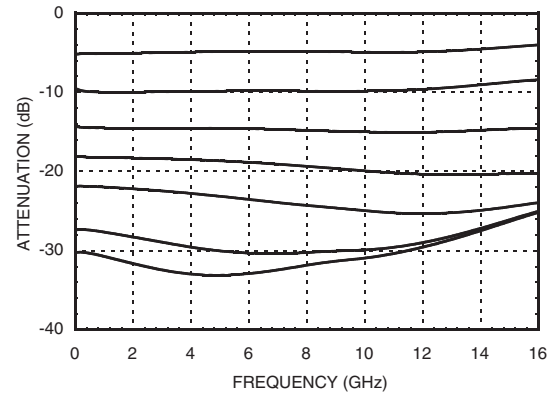


Return Loss vs. Attenuation

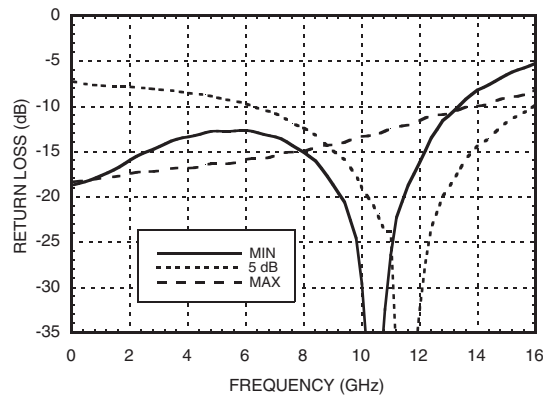


**Relative Attenuation vs.
Control Voltage @ 10 GHz**

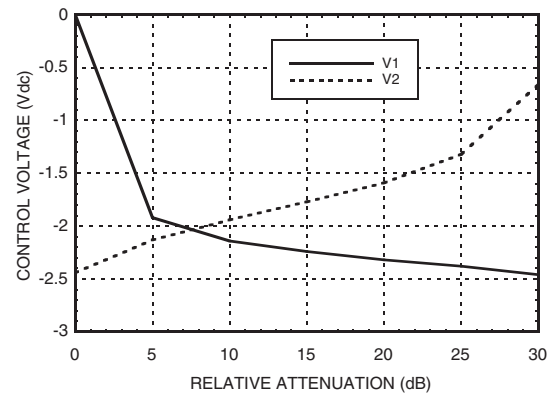

Relative Phase

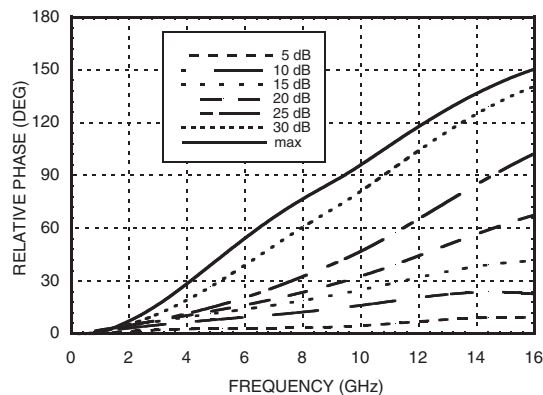

Input IP3 vs. Attenuation*

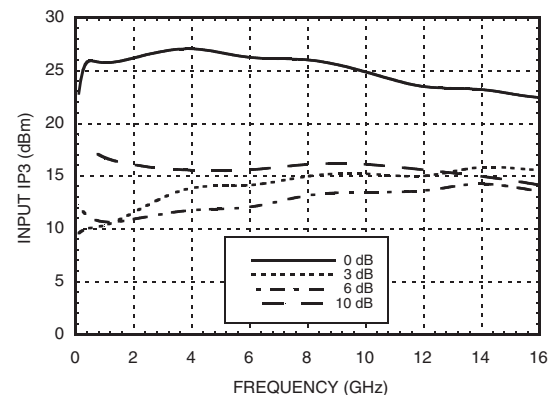

*Two-tone input power = -8 dBm each tone, 1 MHz spacing.




MICROWAVE CORPORATION v05.1008




HMC346LP3 / 346LP3E

GaAs MMIC VOLTAGE-VARIABLE ATTENUATOR, DC - 14 GHz


Input IP2 vs. Attenuation*

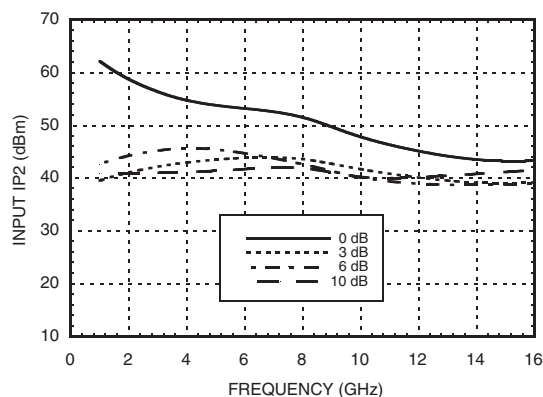


Second Harmonic vs. Attenuation, Pin = -8 dBm

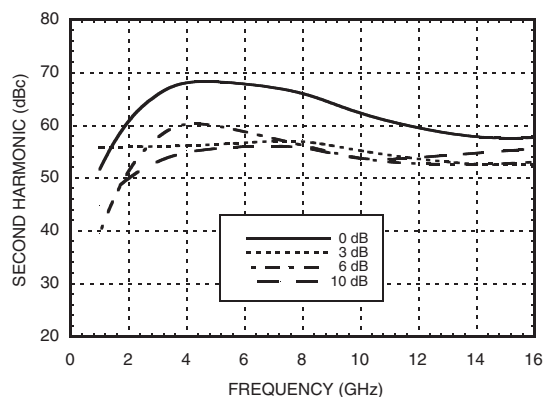

0.25 dB Compression vs. Attenuation

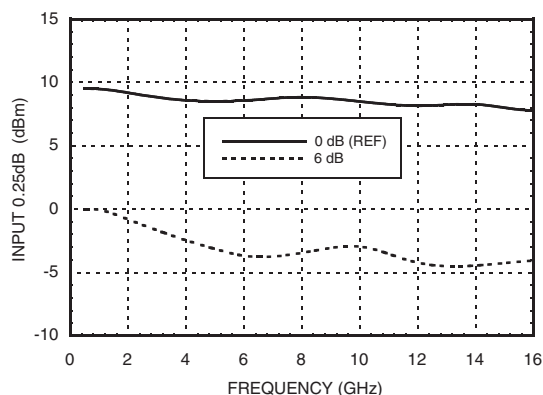

1 dB Compression vs. Attenuation

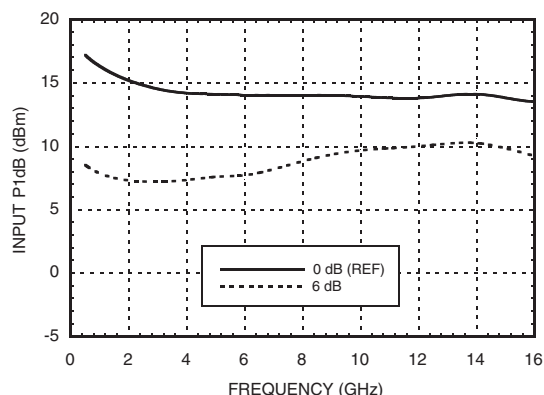

*Two-tone input power = -8 dBm each tone, 1 MHz spacing.



v05.1008



GaAs MMIC VOLTAGE-VARIABLE ATTENUATOR, DC - 14 GHz

RF Input Power	+18 dBm
Control Voltage Range	+1 to -5V
Storage Temperature	-65 to +150 °C
Operating Temperature	-40 to +85 °C
ESD Sensitivity (HBM)	Class 1A



ELECTROSTATIC SENSITIVE DEVICE
OBSERVE HANDLING PRECAUTIONS

TOP VIEW

Dimensions: .122 [3.10], .114 [2.90], .122 [3.10], .114 [2.90], .039 [1.00], .031 [0.80], .002 [0.05], .000 [0.00], .003 [0.08] C, .077 [1.95], .059 [1.50], .061 [1.56], .057 [1.44], .012 [0.30], .007 [0.18], .016 [0.40] REF, .008 [0.20] MIN, .022 [0.56], .017 [0.44]

Labels: HMC PART NUMBER (DIGITS ONLY), LOT NUMBER, PIN 16, PIN 1, EXPOSED GROUND PADDLE MUST BE CONNECTED TO RF/DC GROUND, SQUARE

BOTTOM VIEW

Dimensions: .039 [1.00], .031 [0.80], .002 [0.05], .000 [0.00], .003 [0.08] C, .077 [1.95], .059 [1.50], .061 [1.56], .057 [1.44], .012 [0.30], .007 [0.18], .016 [0.40] REF, .008 [0.20] MIN, .022 [0.56], .017 [0.44]

Labels: HMC PART NUMBER (DIGITS ONLY), LOT NUMBER, PIN 16, PIN 1, EXPOSED GROUND PADDLE MUST BE CONNECTED TO RF/DC GROUND, SQUARE

NOTES:


1. LEADFRAME MATERIAL: COPPER ALLOY
2. DIMENSIONS ARE IN INCHES [MILLIMETERS]
3. LEAD SPACING TOLERANCE IS NON-CUMULATIVE
4. PAD BURR LENGTH SHALL BE 0.15mm MAXIMUM.

Part Number	Package Body Material	Lead Finish	MSL Rating	Package Marking ^[3]
HMC346LP3	Low Stress Injection Molded Plastic	Sn/Pb Solder	MSL1 ^[1]	346 XXXX
HMC346LP3E	RoHS-compliant Low Stress Injection Molded Plastic	100% matte Sn	MSL1 ^[2]	346 XXXX


[3] 4-Digit lot number XXXX

*For price, delivery, and to place orders, please contact Hittite Microwave Corporation:
20 Alpha Road, Chelmsford, MA 01824 Phone: 978-250-3343 Fax: 978-250-3373
Order On-line at www.hittite.com*

Pin Descriptions


Pin Number	Function	Description	Interface Schematic
1, 3, 7, 10, 12	GND	Package bottom has exposed metal paddle that must also be connected to PCB RF ground.	
2, 11	RF1 RF2	This pin is DC coupled and matched to 50 Ohm. Blocking capacitors are required if the RF line potential is not equal to 0V.	
4, 9, 13, 14, 15, 16	N/C	This pin should be connected to PCB RF ground.	
5, 8	V2, V1	Control input (master).	
6	I	Control input (slave).	

Single-Line Control Driver

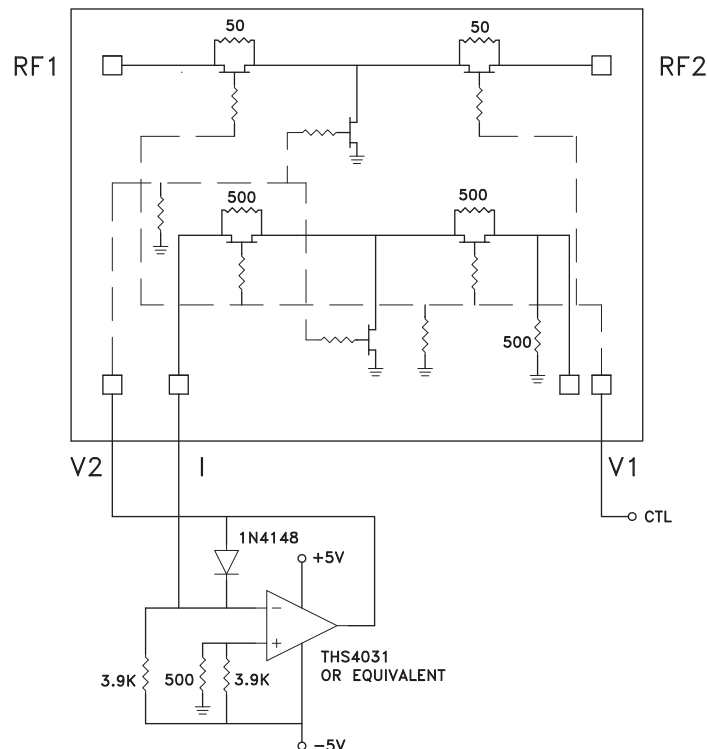

External op-amp control circuit maintains impedance match while attenuation is varied. Input control ranges from 0 Volts (min. attenuation) to -3.0 Volts (max. attenuation.)

Evaluation PCB

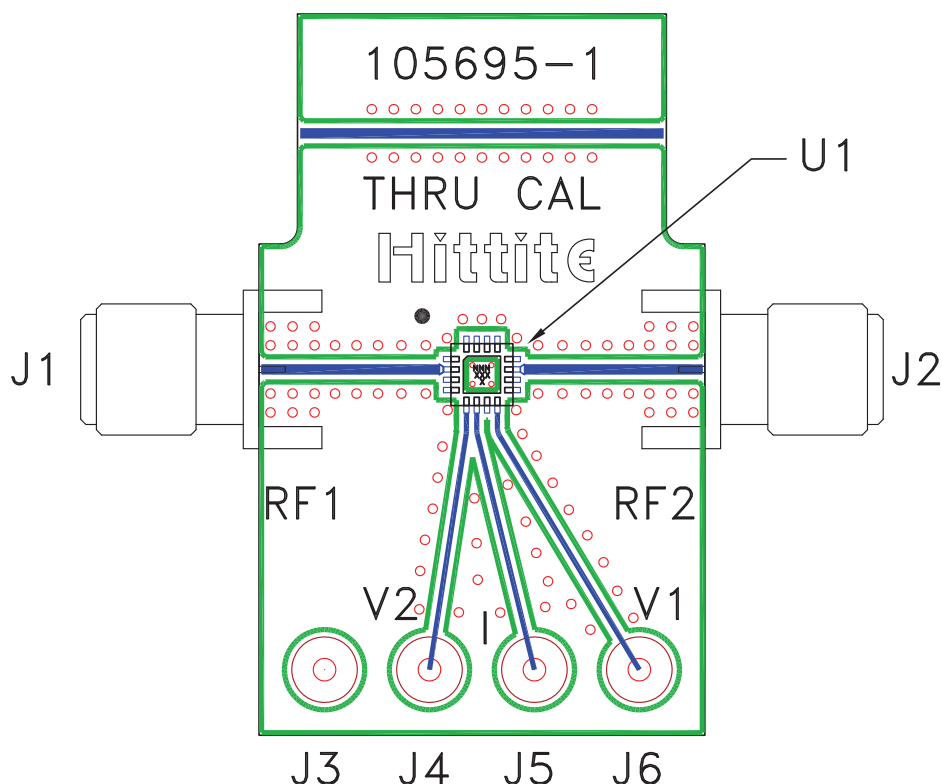

List of Materials for Evaluation PCB 105709 ^[1]

Item	Description
J1 - J2	PCB Mount SMA RF Connector
J3 - J6	DC Pin
U1	HMC346LP3 / HMC346LP3E VVA
PCB [2]	105695 Evaluation PCB

[1] Reference this number when ordering complete evaluation PCB

[2] Circuit Board Material: Rogers 4350

The circuit board used in the final application should be generated with proper RF circuit design techniques. Signal lines at the RF ports should be 50 ohm impedance and the package ground leads and package bottom should be connected directly to the PCB RF ground plane, similar to that shown above. The evaluation circuit board shown above is available from Hittite Microwave Corporation upon request.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.