

VIP-2/SC/FLK14

Order No.: 2315023

The illustration shows a 16-position version



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2315023>

VARIOFACE module, with screw connection and flat-ribbon cable plug connector, for mounting on NS 32 or NS 35/7.5, with pin strip and short and long locking latches for socket strips, 14-pos.



Commercial data	
EAN	4046356312875
Pack	1 pcs.
Customs tariff	85369010
Weight/Piece	0.1009 KG
Catalog page information	Page 278 (IF-2009)

Product notes

WEEE/RoHS-compliant since:
09/02/2008



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

General data	
Nominal voltage U_N	60 V AC/DC
Max. current carrying capacity per branch	1 A
Number of positions	14
Width	39.8 mm

Height	56 mm
Depth	65.5 mm
Status display	No
Ambient temperature (operation)	-20 °C ... 50 °C
Ambient temperature (storage/transport)	-20 °C ... 70 °C
Mounting position	Any
Standards/regulations	IEC 60664
	DIN EN 50178
	IEC 62103
Pollution degree	2
Surge voltage category	II

Connection data

Type of connection	Screw connection
Conductor cross section solid min.	0.2 mm ²
Conductor cross section solid max.	4 mm ²
Conductor cross section stranded min.	0.2 mm ²
Conductor cross section stranded max.	2.5 mm ²
Conductor cross section AWG/kcmil min.	24
Conductor cross section AWG/kcmil max	12
Stripping length	8 mm
Screw thread	M 3
Connection 2	Flat-ribbon cable connection
Type of connection	Flat-ribbon cable plug connector in acc. with IEC 60603-13
Number of positions	14

Certificates / Approvals



Certification CSA, CUL, UL

CSA

Nominal voltage U_N	125 V
Nominal current I_N	1 A
AWG/kcmil	30-12

CUL

Nominal voltage U_N	125 V
Nominal current I_N	1 A
AWG/kcmil	30-12

UL

Nominal voltage U_N	125 V
Nominal current I_N	1 A
AWG/kcmil	30-12

Accessories

Item	Designation	Description
Cable/conductor		
2314040	FLK 14-EZ-DR-HF/...	Assembled halogen-free round cable, with two 14-pos. socket strips (1:1 connection), to transfer 8 channels, for example. Halogen-free refers exclusively to the 14-pos. cable. Length of cable: Variable
2295729	FLK 14/EZ-DR/ 30/KONFEK	Round cable set, with two 14-pos. socket strips (1:1 connection), for connecting 8 channels, cable length: 0.3 m
2288901	FLK 14/EZ-DR/ 50/KONFEK	Round cable set, with two 14-pos. socket strips (1:1 connection), for connecting 8 channels, cable length: 0.5 m
2296977	FLK 14/EZ-DR/ 50/KONFEK/S	Assembled shielded round cable, with two 14-pos. female connectors (1:1 connection), for connecting 8 channels, length: 0.5 m
2288914	FLK 14/EZ-DR/ 100/KONFEK	Round cable set, with two 14-pos. socket strips (1:1 connection), for connecting 8 channels, cable length: 1 m
2296980	FLK 14/EZ-DR/ 100/KONFEK/S	Assembled shielded round cable, with two 14-pos. female connectors (1:1 connection), for connecting 8 channels, length: 1 m
2288927	FLK 14/EZ-DR/ 150/KONFEK	Round cable set, with two 14-pos. socket strips (1:1 connection), for connecting 8 channels, cable length: 1.5 m
2288930	FLK 14/EZ-DR/ 200/KONFEK	Round cable set, with two 14-pos. socket strips (1:1 connection), for connecting 8 channels, cable length: 2 m
2297002	FLK 14/EZ-DR/ 200/KONFEK/S	Assembled shielded round cable, with two 14-pos. female connectors (1:1 connection), for connecting 8 channels, length: 2 m
2288943	FLK 14/EZ-DR/ 250/KONFEK	Round cable set, with two 14-pos. socket strips (1:1 connection), for connecting 8 channels, cable length: 2.5 m
2288956	FLK 14/EZ-DR/ 300/KONFEK	Round cable set, with two 14-pos. socket strips (1:1 connection), for connecting 8 channels, cable length: 3 m

2299013	FLK 14/EZ-DR/ 300/KONFEK/S	Assembled shielded round cable, with two 14-pos. female connectors (1:1 connection), for connecting 8 channels, length: 3 m
2288969	FLK 14/EZ-DR/ 350/KONFEK	Round cable set, with two 14-pos. socket strips (1:1 connection), for connecting 8 channels, cable length: 3.5 m
2288972	FLK 14/EZ-DR/ 400/KONFEK	Round cable set, with two 14-pos. socket strips (1:1 connection), for connecting 8 channels, cable length: 4 m
2299026	FLK 14/EZ-DR/ 400/KONFEK/S	Assembled shielded round cable, with two 14-pos. female connectors (1:1 connection), for connecting 8 channels, length: 4 m
2290847	FLK 14/EZ-DR/ 450/KONFEK	Round cable set, with two 14-pos. socket strips (1:1 connection), for connecting 8 channels, cable length: 4,5 m
2290834	FLK 14/EZ-DR/ 500/KONFEK	Round cable set, with two 14-pos. socket strips (1:1 connection), for connecting 8 channels, cable length: 5 m
2290850	FLK 14/EZ-DR/ 550/KONFEK	Round cable set, with two 14-pos. socket strips (1:1 connection), for connecting 8 channels, cable length: 5,5 m
2290863	FLK 14/EZ-DR/ 600/KONFEK	Round cable set, with two 14-pos. socket strips (1:1 connection), for connecting 8 channels, cable length: 6 m
2299039	FLK 14/EZ-DR/ 600/KONFEK/S	Assembled shielded round cable, with two 14-pos. female connectors (1:1 connection), for connecting 8 channels, length: 6 m
2299563	FLK 14/EZ-DR/ 800/KONFEK	Round cable set, with two 14-pos. socket strips (1:1 connection), for connecting 8 channels, cable length: 8 m
2299042	FLK 14/EZ-DR/ 800/KONFEK/S	Assembled shielded round cable, with two 14-pos. female connectors (1:1 connection), for connecting 8 channels, length: 8 m
2299576	FLK 14/EZ-DR/1000/KONFEK	Round cable set, with two 14-pos. socket strips (1:1 connection), for connecting 8 channels, cable length: 10 m
2299055	FLK 14/EZ-DR/1000/KONFEK/S	Assembled shielded round cable, with two 14-pos. female connectors (1:1 connection), for connecting 8 channels, length: 10 m
2305952	FLK 14/EZ-DR/HF/ 50/KONFEK	Assembled halogen-free round cable, with two 14-pos. socket strips (1:1 connection), to transfer 8 channels, for example. Halogen-free refers exclusively to the 14-pos. cable. Length of cable: 0.5 m
2305965	FLK 14/EZ-DR/HF/ 100/ KONFEK	Assembled halogen-free round cable, with two 14-pos. socket strips (1:1 connection), to transfer 8 channels, for example. Halogen-free refers exclusively to the 14-pos. cable. Length of cable: 1 m
2305978	FLK 14/EZ-DR/HF/ 150/ KONFEK	Assembled halogen-free round cable, with two 14-pos. socket strips (1:1 connection), to transfer 8 channels, for example. Halogen-free refers exclusively to the 14-pos. cable. Length of cable: 1.5 m
2305981	FLK 14/EZ-DR/HF/ 200/ KONFEK	Assembled halogen-free round cable, with two 14-pos. socket strips (1:1 connection), to transfer 8 channels, for example. Halogen-free refers exclusively to the 14-pos. cable. Length of cable: 2 m

2305994	FLK 14/EZ-DR/HF/ 250/ KONFEK	Assembled halogen-free round cable, with two 14-pos. socket strips (1:1 connection), to transfer 8 channels, for example. Halogen-free refers exclusively to the 14-pos. cable. Length of cable: 2.5 m
2304759	FLK 14/EZ-DR/HF/ 300/ KONFEK	Assembled halogen-free round cable, with two 14-pos. socket strips (1:1 connection), to transfer 8 channels, for example. Halogen-free refers exclusively to the 14-pos. cable.Length of cable: 3 m
2304762	FLK 14/EZ-DR/HF/ 400/ KONFEK	Assembled halogen-free round cable, with two 14-pos. socket strips (1:1 connection), to transfer 8 channels, for example. Halogen-free refers exclusively to the 14-pos. cable.Length of cable: 4 m
2304717	FLK 14/EZ-DR/HF/ 500/ KONFEK	Assembled halogen-free round cable, with two 14-pos. socket strips (1:1 connection), to transfer 8 channels, for example. Halogen-free refers exclusively to the 14-pos. cable.Length of cable: 5 m
2306003	FLK 14/EZ-DR/HF/ 600/ KONFEK	Assembled halogen-free round cable, with two 14-pos. socket strips (1:1 connection), to transfer 8 channels, for example. Halogen-free refers exclusively to the 14-pos. cable.Length of cable: 6 m
2314011	FLK 14/EZ-DR/HF/ 700/ KONFEK	Assembled halogen-free round cable, with two 14-pos. socket strips (1:1 connection), to transfer 8 channels, for example. Halogen-free refers exclusively to the 14-pos. cable.Length of cable: 7 m
2314024	FLK 14/EZ-DR/HF/ 800/ KONFEK	Assembled halogen-free round cable, with two 14-pos. socket strips (1:1 connection), to transfer 8 channels, for example. Halogen-free refers exclusively to the 14-pos. cable.Length of cable: 8 m
2314037	FLK 14/EZ-DR/HF/1000/ KONFEK	Assembled halogen-free round cable, with two 14-pos. socket strips (1:1 connection), to transfer 8 channels, for example. Halogen-free refers exclusively to the 14-pos. cable.Length of cable: 10 m
2295046	FLK EZ-DR-S.../.../...	Round cable, with preassembly, shielded, variable cable length
2295059	FLK EZ-DR.../.../...	Round cable, with preassembly, not shielded, variable cable length
2318457	VIP-CAB-FLK14-0,14/...	Assembled round cable with two molded 14-pos. socket strips (1:1 connection). The cable has a 90° punched on connector and a 180° punched on connector, cable length: Variable
2318389	VIP-CAB-FLK14/0,14/0,5M	Assembled round cable with two molded 14-pos. socket strips (1:1 connection). The cable has a 90° punched on connector and a 180° punched on connector, cable length: 0.5 m
2318392	VIP-CAB-FLK14/0,14/1,0M	Assembled round cable with two molded 14-pos. socket strips (1:1 connection). The cable has a 90° punched on connector and a 180° punched on connector, cable length: 1 m
2318402	VIP-CAB-FLK14/0,14/1,5M	Assembled round cable with two molded 14-pos. socket strips (1:1 connection). The cable has a 90° punched on connector and a 180° punched on connector, cable length: 1.5 m

2318415	VIP-CAB-FLK14/0,14/2,0M	Assembled round cable with two molded 14-pos. socket strips (1:1 connection). The cable has a 90° punched on connector and a 180° punched on connector, cable length: 2 m
2318428	VIP-CAB-FLK14/0,14/3,0M	Assembled round cable with two molded 14-pos. socket strips (1:1 connection). The cable has a 90° punched on connector and a 180° punched on connector, cable length: 3 m
2318431	VIP-CAB-FLK14/0,14/4,0M	Assembled round cable with two molded 14-pos. socket strips (1:1 connection). The cable has a 90° punched on connector and a 180° punched on connector, cable length: 4 m
2318444	VIP-CAB-FLK14/0,14/6,0M	Assembled round cable with two molded 14-pos. socket strips (1:1 connection). The cable has a 90° punched on connector and a 180° punched on connector, cable length: 6 m

General


5147777	BLUEMARK X1	Printers with UV technology for printing plastic labels in UniCard format.
---------	-------------	--

Marking

0818111	UC-TM 4	UniCard sheets, for labeling terminal blocks using a Zack marker strip groove, 120-section, can be labeled with BLUEMARK X1 and CMS-P1-PLOTTER, color: White
0818085	UC-TM 6	UniCard sheets, for labeling terminal blocks using Zack marker strip groove, 80-section, labeling with BLUEMARK X1 and CMS-P1-PLOTTER, color: White
0811862	ZB 22:UNBEDRUCKT	Zack marker strip, unprinted: 4-section, for individual labeling with M-PEN, ZB-T or CMS system, sufficient for 100 terminal blocks, for a terminal width of 22 mm, color: White
0809793	ZB 5,08:UNBEDRUCKT	Zack strip, unprinted: 10-section, for individual labeling with M-PEN, ZB-T or CMS system, sufficient for 100 terminal blocks per pack

Diagrams/Drawings

Circuit diagram

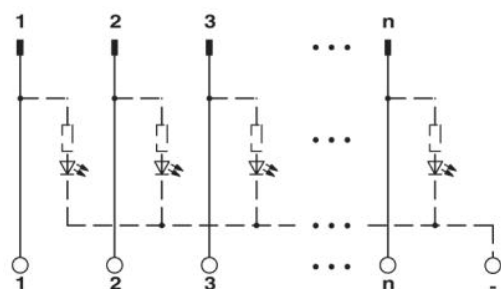

Address

PHOENIX CONTACT Deutschland GmbH
Flachmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 12000
Fax +49 5235 3 41200
<http://www.phoenixcontact.de>



© 2010 Phoenix Contact
Technical modifications reserved;



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.