

LOC	DIST	REVISIONS					
AD	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
			A	REVISED PER ECO-10-018157	27SEP10	DH	MM


OBSOLETE	8.892	0.156	8.580	0.156	56	5-5583486-0
OBSOLETE	8.424	0.156	8.112	0.156	53	4-5583486-9
OBSOLETE	0.624	0.156	0.312	0.156	3	4-5583486-8
OBSOLETE	0.780	0.156	0.460	0.156	4	4-5583486-7
OBSOLETE	0.936	0.156	0.624	0.156	5	4-5583486-6
OBSOLETE	1.092	0.156	0.780	0.156	6	4-5583486-5
OBSOLETE	1.248	0.156	0.936	0.156	7	4-5583486-4
OBSOLETE	1.404	0.156	1.092	0.156	8	4-5583486-3
OBSOLETE	1.560	0.156	1.273	0.156	9	4-5583486-2
OBSOLETE	1.716	0.156	1.404	0.156	10	4-5583486-1
OBSOLETE	1.872	0.156	1.568	0.156	11	4-5583486-0
OBSOLETE	2.028	0.156	1.716	0.156	12	3-5583486-9
OBSOLETE	2.184	0.156	1.872	0.156	13	3-5583486-8
OBSOLETE	2.340	0.156	2.026	0.156	14	3-5583486-7
OBSOLETE	2.496	0.156	2.134	0.156	15	3-5583486-6
OBSOLETE	2.652	0.156	2.340	0.156	16	3-5583486-5
OBSOLETE	2.808	0.156	2.496	0.156	17	3-5583486-4
OBSOLETE	2.964	0.156	2.652	0.156	18	3-5583486-3
OBSOLETE	3.120	0.156	2.808	0.156	19	3-5583486-2
OBSOLETE	3.276	0.156	2.964	0.156	20	3-5583486-1
OBSOLETE	3.432	0.156	3.120	0.156	21	3-5583486-0
OBSOLETE	3.588	0.156	3.276	0.156	22	2-5583486-9
OBSOLETE	3.744	0.156	3.432	0.156	23	2-5583486-8
OBSOLETE	3.900	0.156	3.588	0.156	24	2-5583486-7
OBSOLETE	4.056	0.156	3.744	0.156	25	2-5583486-6
OBSOLETE	4.212	0.156	3.900	0.156	26	2-5583486-5
OBSOLETE	4.368	0.156	4.056	0.156	27	2-5583486-4
	4.524	0.156	4.212	0.156	28	2-5583486-3
OBSOLETE	4.680	0.156	4.360	0.156	29	2-5583486-2
OBSOLETE	4.836	0.156	4.524	0.156	30	2-5583486-1
OBSOLETE	4.992	0.156	4.650	0.156	31	2-5583486-0
OBSOLETE	5.148	0.156	4.886	0.156	32	1-5583486-9
	5.304	0.156	4.992	0.156	33	1-5583486-8
OBSOLETE	5.460	0.156	5.143	0.156	34	1-5583486-7
OBSOLETE	5.616	0.156	5.304	0.156	35	1-5583486-6
OBSOLETE	5.772	0.156	5.460	0.156	36	1-5583486-5
OBSOLETE	5.928	0.156	5.616	0.156	37	1-5583486-4
OBSOLETE	6.084	0.156	5.716	0.156	38	1-5583486-3
OBSOLETE	6.240	0.156	5.928	0.156	39	1-5583486-2
OBSOLETE	6.396	0.156	6.084	0.156	40	1-5583486-1
OBSOLETE	6.552	0.156	6.240	0.156	41	1-5583486-0
OBSOLETE	6.708	0.156	6.396	0.156	42	5583486-9
OBSOLETE	6.864	0.156	6.552	0.156	43	5583486-8
OBSOLETE	7.020	0.156	6.708	0.156	44	5583486-7
OBSOLETE	7.176	0.156	6.864	0.156	45	5583486-6
OBSOLETE	7.332	0.156	7.020	0.156	46	5583486-5
OBSOLETE	7.488	0.156	7.176	0.156	47	5583486-4
OBSOLETE	7.644	0.156	7.332	0.156	48	5583486-3
OBSOLETE	7.800	0.156	7.488	0.156	49	5583486-2
OBSOLETE	7.956	0.156	7.644	0.156	50	5583486-1

NOTES	D	C	B	A	NO OF POSN	PART NO
-------	---	---	---	---	------------	---------

- 1

FINISH: .000015 GOLD. SELECTIVE.
- 2


SEE SHEET 2 FOR RECOMMENDED PRINTED CIRCUIT BOARD LAYOUT.

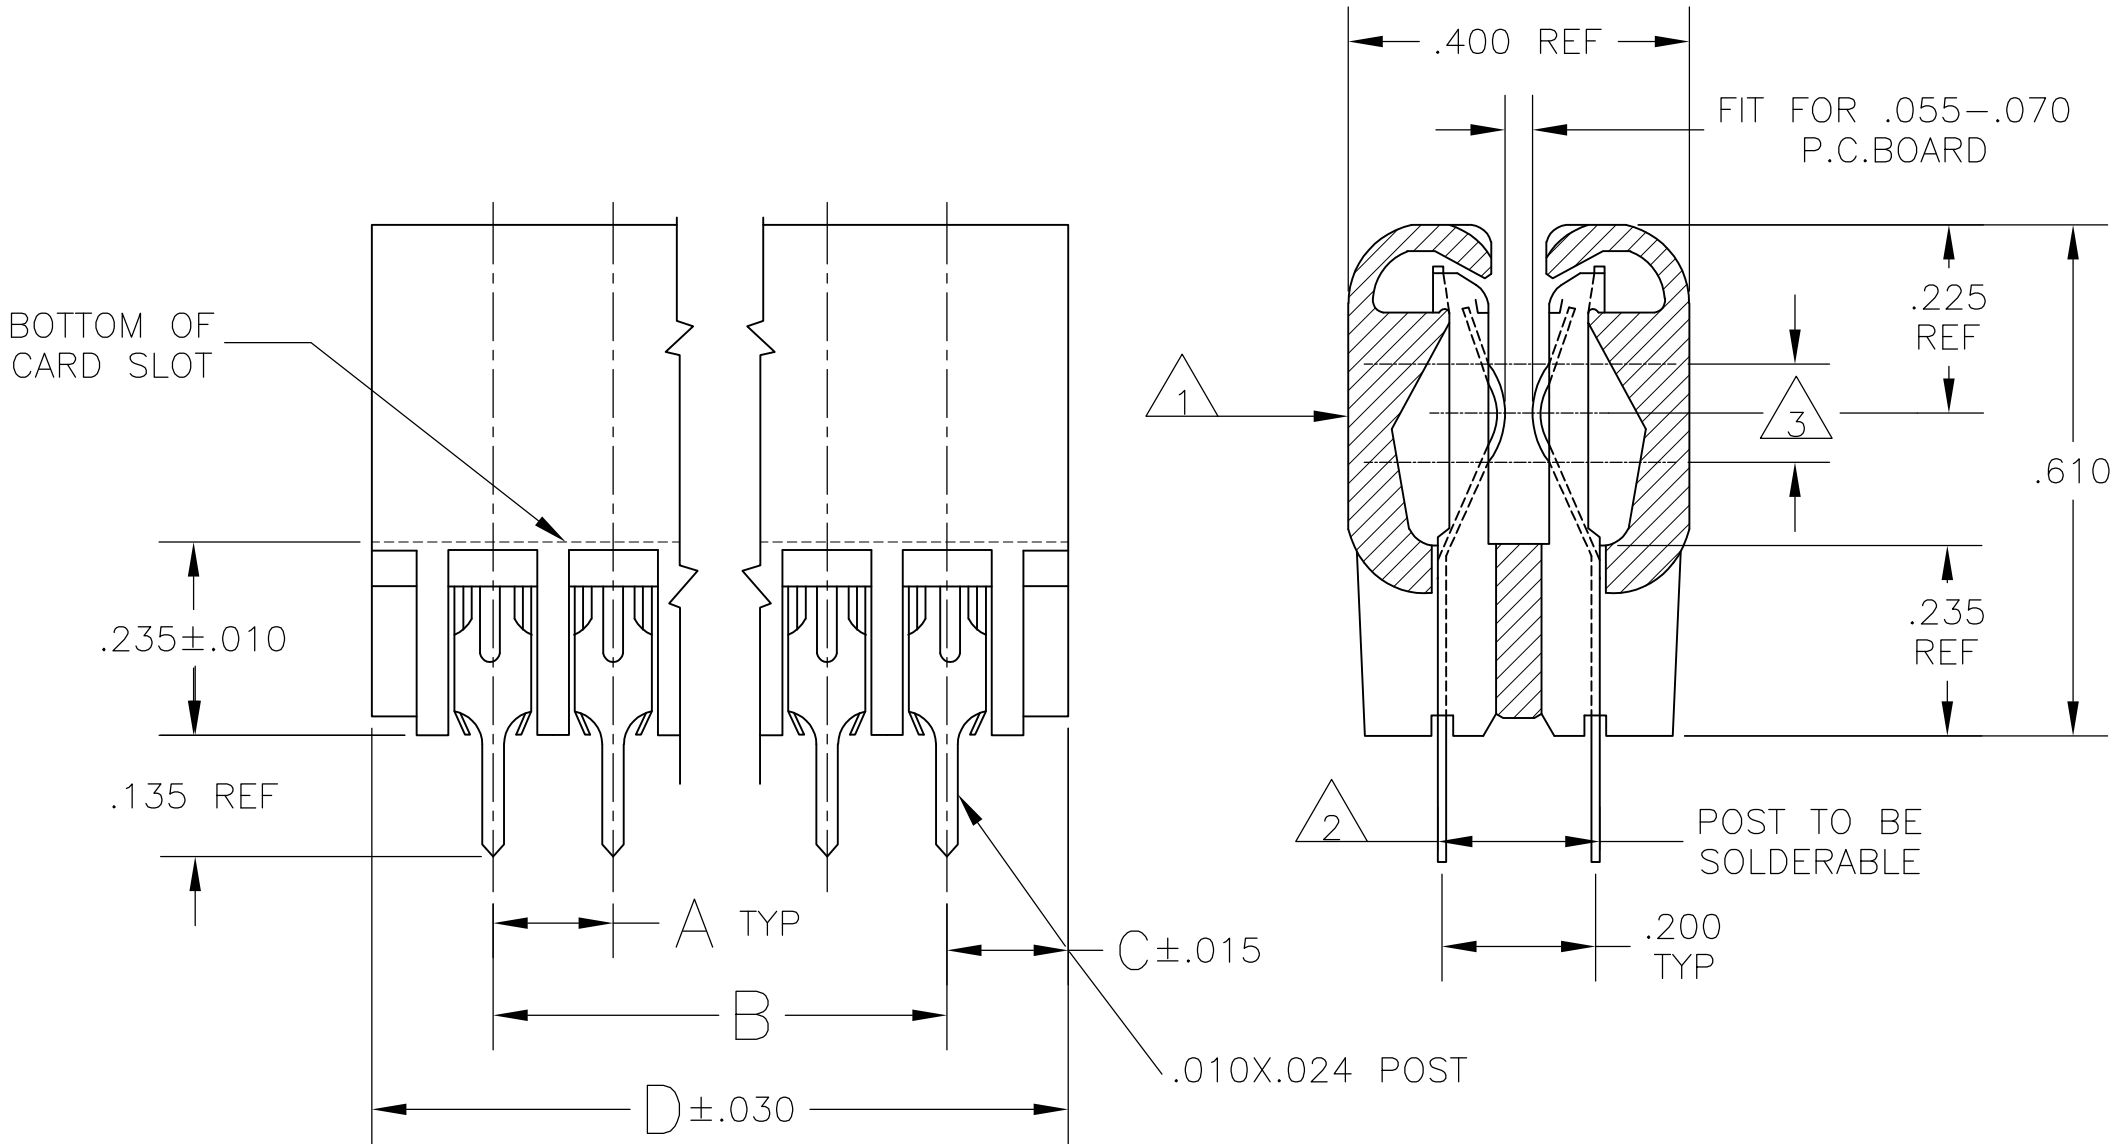

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN — 29-1-73	Tyco Electronics Tyco Electronics Corporation Harrisburg, Pa 17105-3608			
DIMENSIONS: INCHES		CHK — 5-2-73				
		APVD J.BROWN 5-2-73	NAME HOUSING ASSEMBLY, TWIN LEAF CONNECTOR 156 C/L, SOLDER TYPE POST			
		PRODUCT SPEC —	—			
MATERIAL △ HOUSING: GLASS FILLED POLYESTER COLOR: BLACK △ CONTACT: PHOS BRONZE		APPLICATION SPEC —	SIZE A2			
		WEIGHT —	CAGE CODE 00779			
FINISH —		CUSTOMER DRAWING		DRAWING NO C=5583486		RESTRICTED TO —
		SCALE 4:1		SHEET 1 OF 2		REV A


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
AD	00						
			—	SEE SHEET 1	—	—	—

D

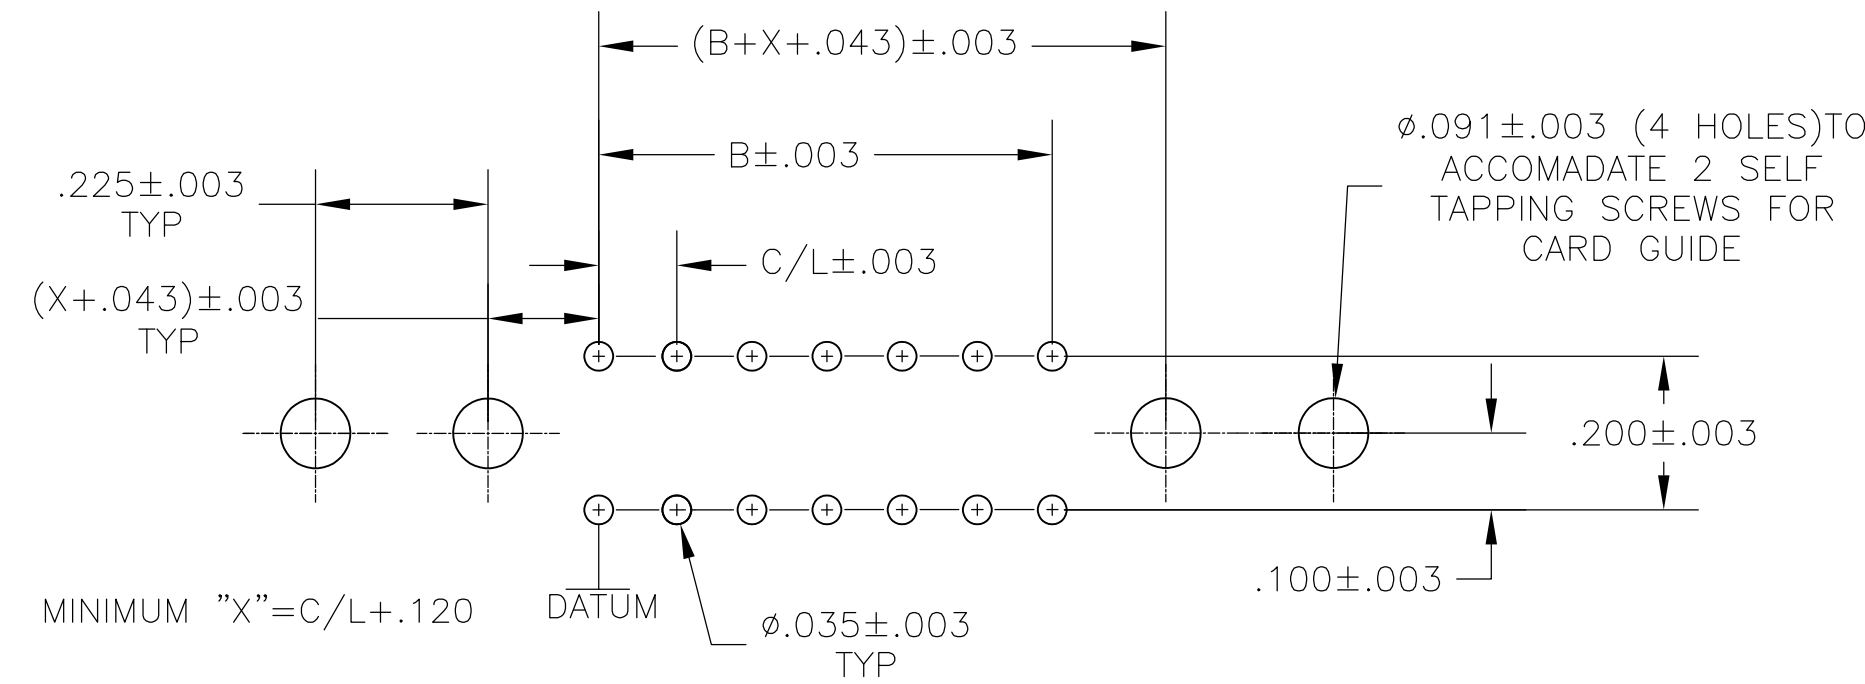


BOARD LAYOUT FOR USE WITH AMP CARD GUIDE PART NO.583671

C

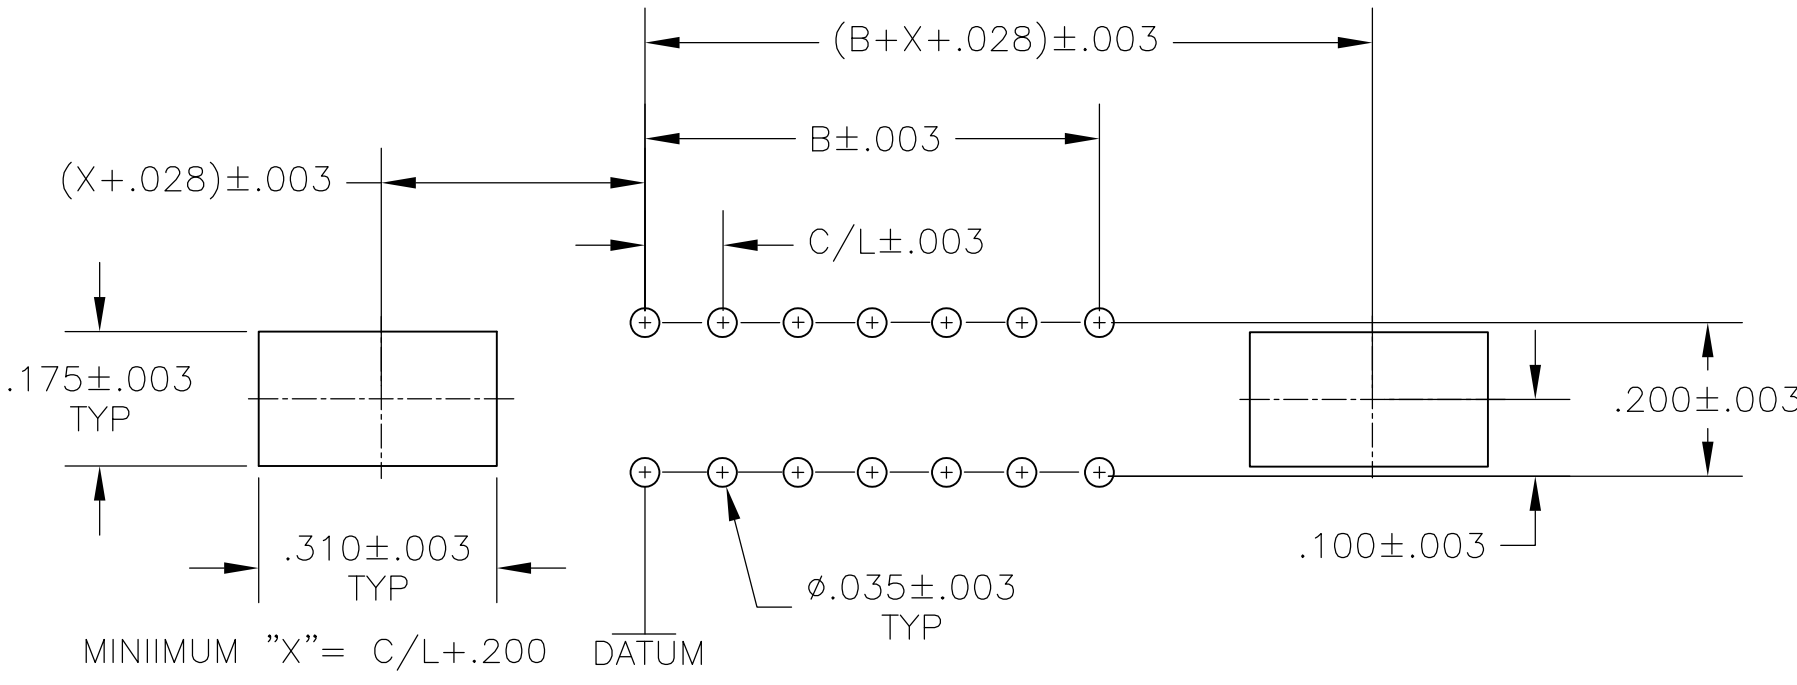

BOARD LAYOUT FOR USE WITH AMP CARD GUIDE PART NO.583408 OR 583425


B

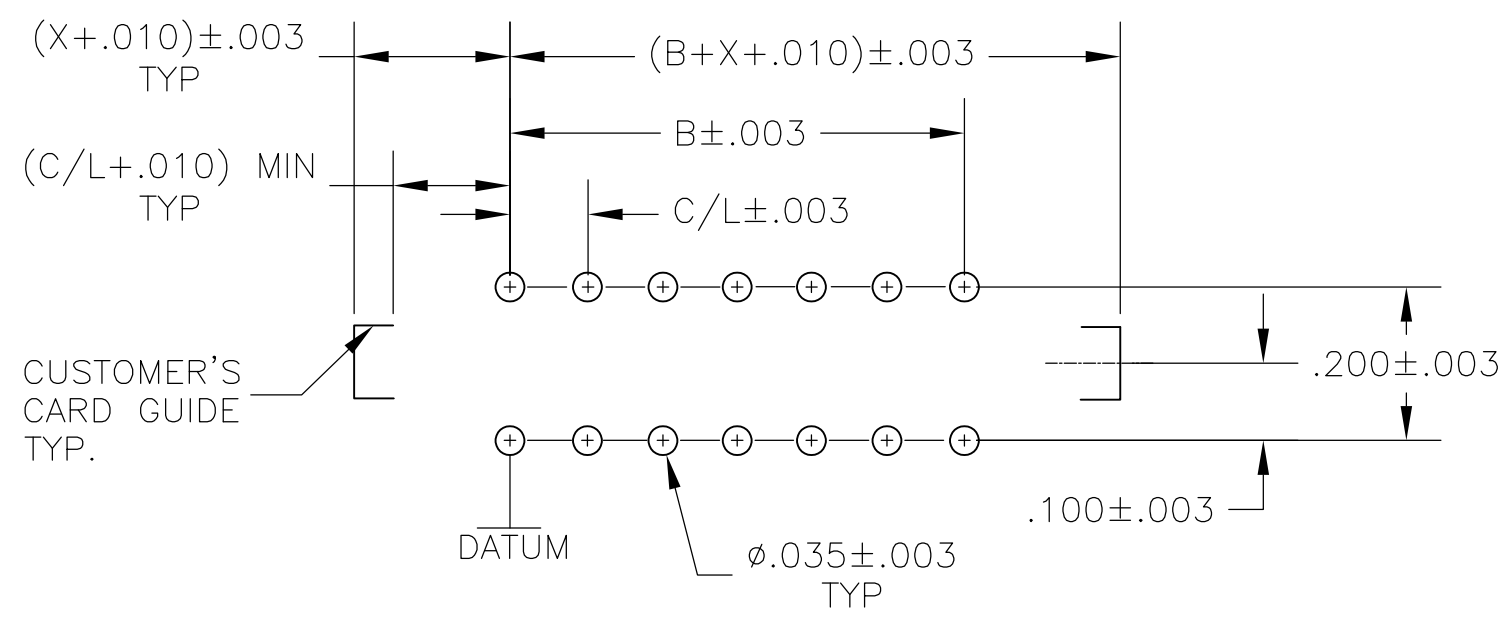


BOARD LAYOUT FOR USE WITH CUSTOMER SUPPLIED CARD GUIDE

INTER-CONTACT KEYING PLUG	"R"	FOR CENTER LINE SPACING
530030-1	.050	.125-.150-.156
530030-2	.040	.100

ON CONTACT KEYING PLUG	"S"	FOR CENTER LINE SPACING
583714-1	.129	.100-.125
583714-2	.160	.150-.156

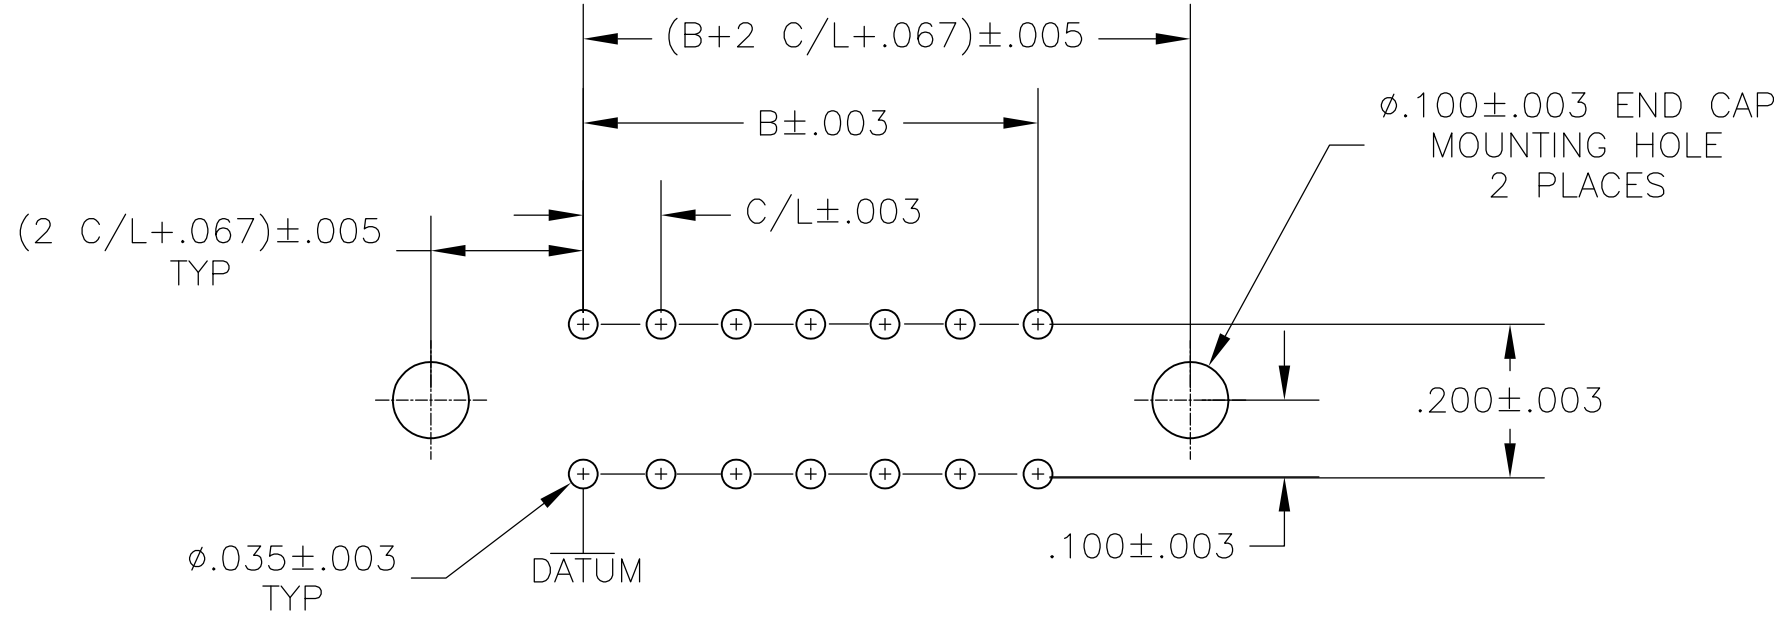

BOARD LAYOUT FOR USE WITH END CAP

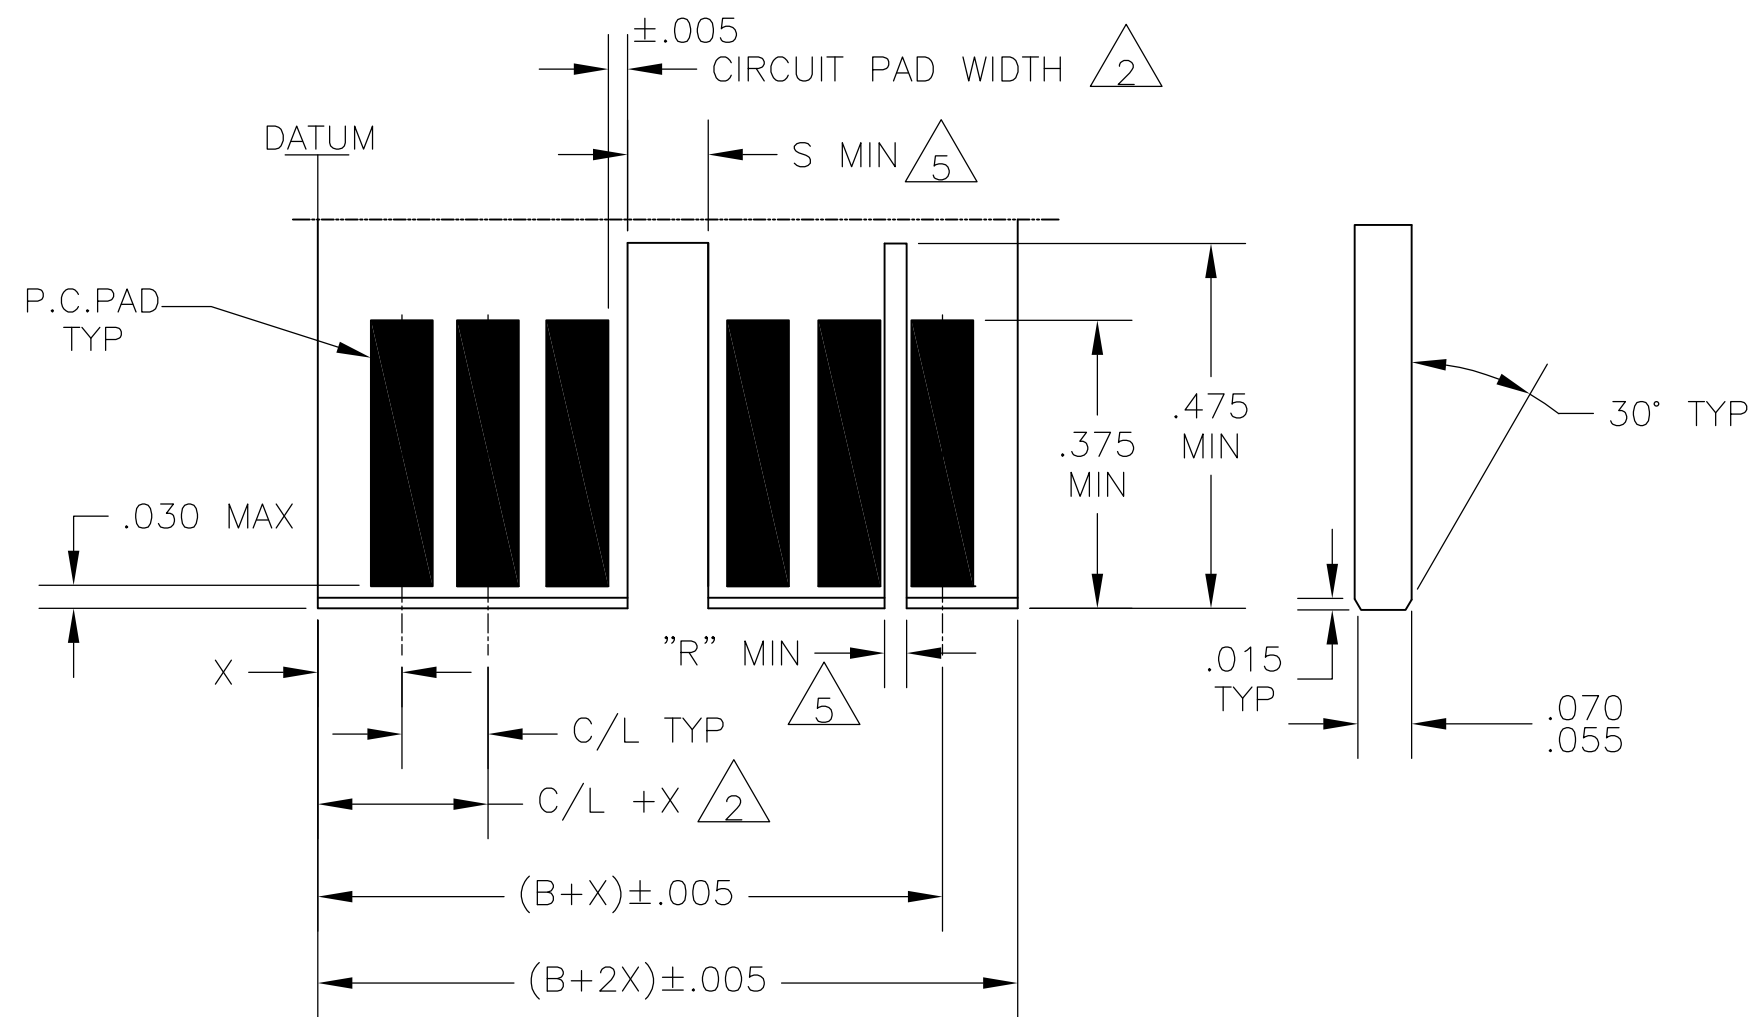

DAUGHTER BOARD LAYOUT

1. MAX ALLOWABLE WARPAGE OF MOTHER BOARD NOT TO EXCEED .005/IN MAX.ALLOWABLE BOW OF DAUGHTER BOARD NOT TO EXCEED .010/IN. THICKNESS OF MOTHER BOARD IS .062 FOR DOUBLE SLOTTED CARD GUIDES AND .104 MAX. FOR ALL OTHER MOUNTING CONDITIONS.
2. EACH PAD LOCATION INCREASES BY C/L±.005 WITH A NON-CUMULATIVE TOLERANCE OF ±.005
3. CIRCUIT PAD WIDTH -.045 FOR .100 C/L, .072 FOR .125 C/L, .072 FOR .150 C/L, .080 FOR .156 C/L
4. DIMENSIONS APPLY TO BOTH SIDES OF DAUGHTER BOARD.
5. C/L INCREMENTS ON MOTHER BOARD HAVE ±.003 NON-CUMULATIVE TOLERANCE.
6. "X" IS A CUSTOMER CONTROLLED DIMENSION EXCEPT FOR END CAP ASSEMBLIES WHERE "X" = C/L - .008
7. THE SLOT FOR INTER-CONTACT KEYING PLUGS MUST BE CENTERED BETWEEN THE PRINTED CIRCUIT PADS, WHILE THE SLOT FOR ON-CONTACT KEYING PLUGS MUST BE CENTERED ON THE AREA OF A PRINTED CIRCUIT PAD.

A

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN

29-1-73

CHK

5-2-73

APVD

J.BROWN

14-2-73

PRODUCT SPEC

APPLICATION SPEC

WEIGHT

CUSTOMER DRAWING

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC

±

-

1 PLC

±

-

2 PLC

±

-

3 PLC

±

-

4 PLC

±

-

ANGLES

±

-

FINISH

-

Tyco Electronics

Tyco Electronics Corporation

Harrisburg, Pa 17105-3608

NAME

HOUSING ASSEMBLY, TWIN LEAF CONNECTOR

.156 CENTERS.

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A2

00779

C=5583486

-

SCALE

4:1

SHEET

2

OF

2

REV

A

5583486



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.