

## Features

### Unregulated Converter

- 1 : 1 Input Range
- 0.5W SMD Package
- Efficiency up to 80%
- Approved for Medical Applications
- 1kVDC and 3 kVDC Isolation Option
- Operating Temperature from -40°C to +100°C

### Specifications (measured at $T_A = 25^\circ\text{C}$ , nominal input voltage, full load and after warm-up)

| Part Number SMD | Input Voltage (VDC) | Output Voltage (VDC) | Output Current (mA) | Efficiency typ. (%) | Max Capacitive Load <sup>(1)**</sup> |
|-----------------|---------------------|----------------------|---------------------|---------------------|--------------------------------------|
| R0.5S**-3.305*  | 3.3                 | 5                    | 100                 | 80                  | 1000 $\mu\text{F}$                   |
| R0.5S**-3.312*  | 3.3                 | 12                   | 42                  | 77                  | 150 $\mu\text{F}$                    |
| R0.5S**-3.315*  | 3.3                 | 15                   | 33                  | 77                  | 150 $\mu\text{F}$                    |
| R0.5S**-0505*   | 5                   | 5                    | 100                 | 72                  | 1000 $\mu\text{F}$                   |
| R0.5S**-0512*   | 5                   | 12                   | 42                  | 77                  | 150 $\mu\text{F}$                    |
| R0.5S**-0515*   | 5                   | 15                   | 33                  | 79                  | 150 $\mu\text{F}$                    |
| R0.5S**-1205*   | 12                  | 5                    | 100                 | 74                  | 1000 $\mu\text{F}$                   |
| R0.5S**-1212*   | 12                  | 12                   | 42                  | 75                  | 150 $\mu\text{F}$                    |
| R0.5S**-1215*   | 12                  | 15                   | 33                  | 75                  | 150 $\mu\text{F}$                    |
| R0.5S**-2405*   | 24                  | 5                    | 100                 | 75                  | 1000 $\mu\text{F}$                   |
| R0.5S**-2412*   | 24                  | 12                   | 42                  | 77                  | 150 $\mu\text{F}$                    |
| R0.5S**-2415*   | 24                  | 15                   | 33                  | 77                  | 150 $\mu\text{F}$                    |
| R0.5D**-3.305*  | 3.3                 | $\pm 5$              | $\pm 50$            | 79                  | $\pm 470\mu\text{F}$                 |
| R0.5D**-3.312*  | 3.3                 | $\pm 12$             | $\pm 21$            | 76                  | $\pm 68\mu\text{F}$                  |
| R0.5D**-3.315*  | 3.3                 | $\pm 15$             | $\pm 17$            | 77                  | $\pm 68\mu\text{F}$                  |
| R0.5D**-0505*   | 5                   | $\pm 5$              | $\pm 50$            | 79                  | $\pm 470\mu\text{F}$                 |
| R0.5D**-0512*   | 5                   | $\pm 12$             | $\pm 21$            | 77                  | $\pm 68\mu\text{F}$                  |
| R0.5D**-0515*   | 5                   | $\pm 15$             | $\pm 17$            | 79                  | $\pm 68\mu\text{F}$                  |
| R0.5D**-1205*   | 12                  | $\pm 5$              | $\pm 50$            | 76                  | $\pm 470\mu\text{F}$                 |
| R0.5D**-1212*   | 12                  | $\pm 12$             | $\pm 21$            | 75                  | $\pm 68\mu\text{F}$                  |
| R0.5D**-1215*   | 12                  | $\pm 15$             | $\pm 17$            | 75                  | $\pm 68\mu\text{F}$                  |
| R0.5D**-2405*   | 24                  | $\pm 5$              | $\pm 50$            | 77                  | $\pm 470\mu\text{F}$                 |
| R0.5D**-2412*   | 24                  | $\pm 12$             | $\pm 21$            | 75                  | $\pm 68\mu\text{F}$                  |
| R0.5D**-2415*   | 24                  | $\pm 15$             | $\pm 17$            | 75                  | $\pm 68\mu\text{F}$                  |

\*add Suffix "/H" for 3kVDC Isolation Voltage

\*add Suffix "/P" for continuous short circuit protection

\*add Suffix "-R" for tape & reel packing

For more details and dimensions of the tapes and reels see Application Notes

R0.5S\*\*:

\*\*without marking denotes 5 pins out of 8 fitted (includes „/H“ option)

\*\*with marking 8 denotes 8 pins out of 8 fitted („/H“ option not available)

\*\*with marking 12 denotes 10 pins out of 12 fitted (includes „/H“ option)

R0.5D\*\*:

\*\*without marking denotes 6 pins out of 10 fitted (includes „/H“ option)

\*\*with marking 10 denotes 10 pins out of 10 fitted („/H“ option not available)

\*\*with marking 12 denotes 10 pins out of 12 fitted (includes „/H“ option)

## ECONOLINE

### DC/DC-Converter

with 3 year Warranty

## RECOM


## 0.5 Watt SMD Isolated Single or Dual Output



UL-60950-1 Certified

## R0.5S\_D

## Derating-Graph (Ambient Temperature)

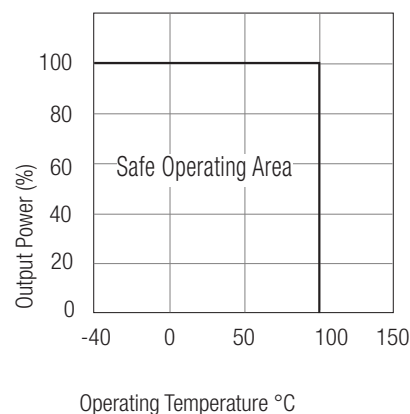

Refer to Application Notes

### Specifications (measured at $T_A = 25^\circ\text{C}$ , nominal input voltage, full load and after warm-up)

|                                             |                                                                          |                                                                  |
|---------------------------------------------|--------------------------------------------------------------------------|------------------------------------------------------------------|
| Input Voltage Range                         |                                                                          | $\pm 10\%$ max.                                                  |
| Voltage Set Accuracy                        | 100% Load/nominal Vin                                                    | -1% typ. / $\pm 5\%$ max.                                        |
| Line Regulation                             | Low Line to High Line @ max. Load                                        | 1.2% typ.                                                        |
| Load Regulation                             | 5V output                                                                | 6% typ. / 15% max.                                               |
| (10% to 100% Load)                          | 12/15V output                                                            | 5%typ. / 10% max.                                                |
| Ripple & Noise @ 20MHz BW                   |                                                                          | 50 mVp-p typ. / 100mVp-p max.                                    |
| Efficiency at Full Load                     |                                                                          | 70% min.                                                         |
| Operating Temperature                       |                                                                          | $-40^\circ\text{C}$ to $+100^\circ\text{C}$                      |
| Storage Temperature                         |                                                                          | $-55^\circ\text{C}$ to $+125^\circ\text{C}$                      |
| Isolation Voltage                           | (tested for 1 second)<br>(rated for 1 minute***)                         | 1000VDC<br>500VAC / 60Hz                                         |
| Isolation Voltage                           | H-Suffix<br>(tested for 1 second)<br>H-Suffix<br>(rated for 1 minute***) | 3000VDC<br>1500VAC / 60Hz                                        |
| Isolation Capacitance                       |                                                                          | 75pF max.                                                        |
| Isolation Resistance                        | Viso = 500V                                                              | 10 G $\Omega$ min.                                               |
| Humidity                                    |                                                                          | 95% max.                                                         |
| Operating Frequency                         | Vin (nom.)                                                               | 20kHz min. / 50 kHz typ. / 90 kHz max.                           |
| Short-Circuit Protection                    |                                                                          | 1 Second                                                         |
| MTBF                                        | Using MIL-HDBK 217F ( $+100^\circ\text{C}$ )                             | 1003 x $10^3$ hours                                              |
| Using MIL-HDBK 217F ( $+25^\circ\text{C}$ ) | 3962 x $10^3$ hours                                                      | <i>Detailed Information see Application Notes chapter „MTBF“</i> |
| Weight                                      | Single Types                                                             | 1.0 g                                                            |
|                                             | Dual Types                                                               | 1.2 g                                                            |
| Certification                               |                                                                          |                                                                  |
| UL General Safety                           | Report: E358085                                                          | UL 60950-1 2nd Ed.                                               |

\*\*\*Any data referred to in this datasheet are of indicative nature and based on our practical experience only. For further details, please refer to our Application Notes.

#### Notes



Note1: Maximum capacitive load is defined as the capacitive load that will allow start up in under 1second without damage to the converter.

## Typical Characteristics


### Tolerance Envelope



## R0.5S-3.3xx

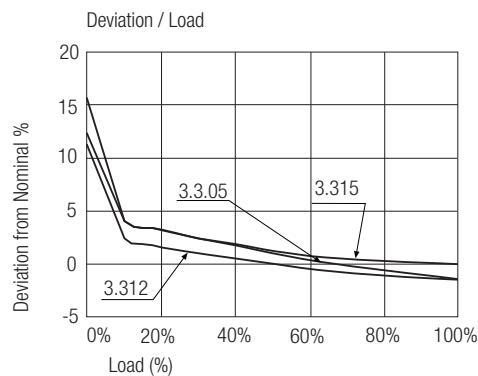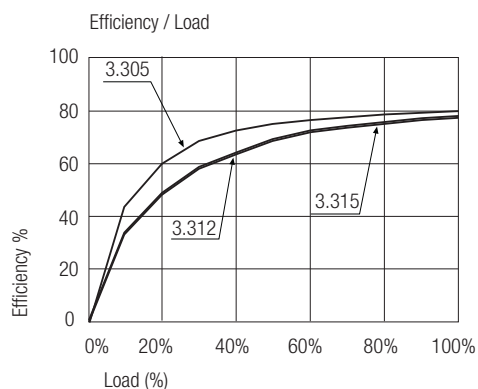



## R0.5S-05xx

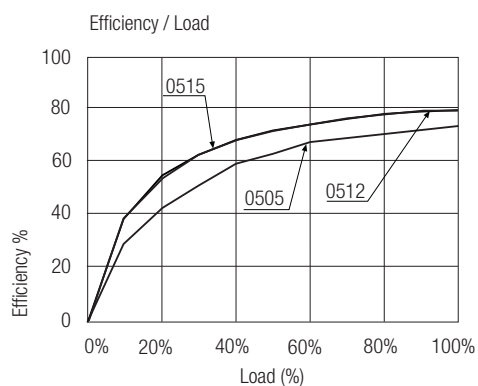

## R0.5S-12xx





## R0.5S-24xx

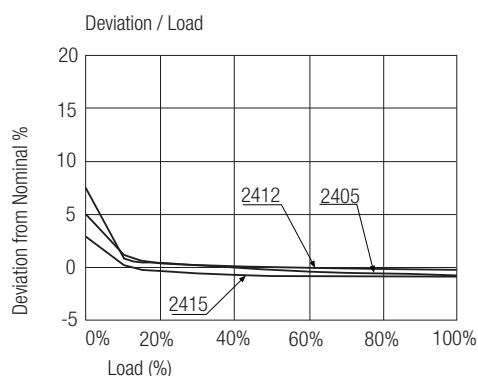
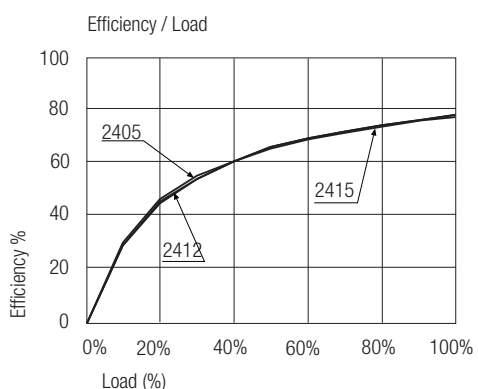


### Typical Characteristics



#### R0.5D-3.3xx

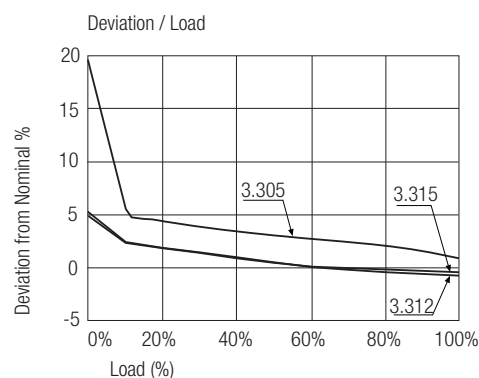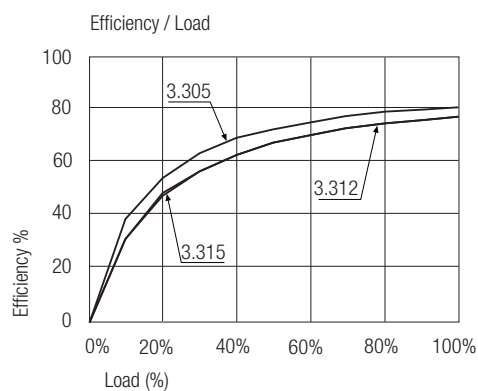



#### R0.5D-05xx

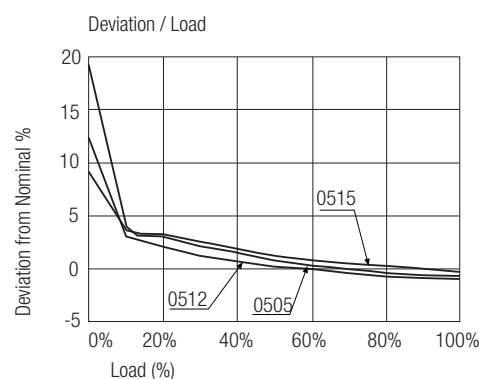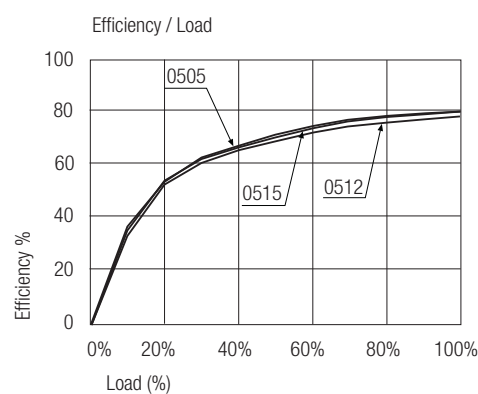

#### R0.5D-12xx

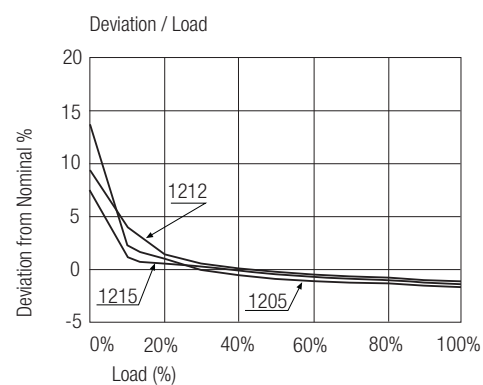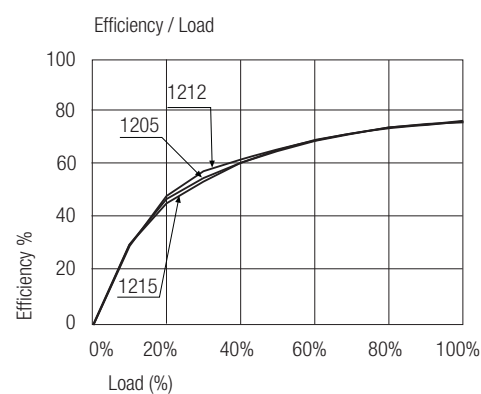

#### R0.5D-24xx

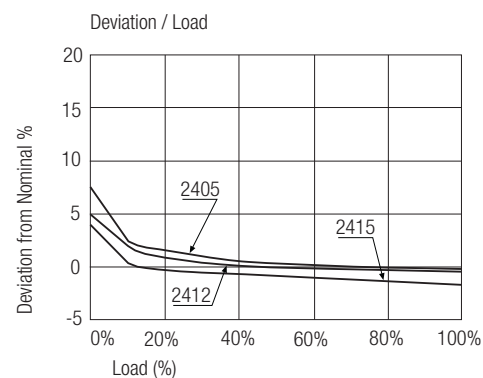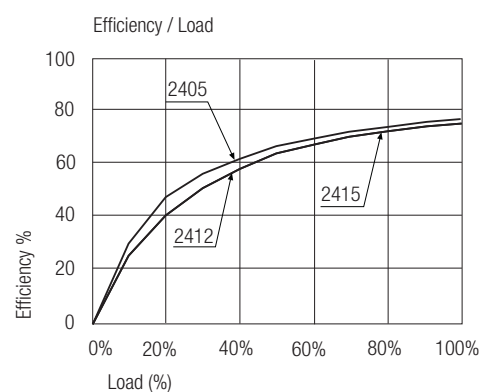

## Single Output



Except „/P“ Versions

| C1    | L1    | Vin  |
|-------|-------|------|
| 4.7µF | 4.7µH | 3.3V |
| 4.7µF | 4.7µH | 5V   |
| 4.7µF | 4.7µH | 12V  |
| 2.2µF | 4.7µH | 15V  |

## Dual Output



Except „/P“ Versions

| C1    | L1    | Vin  |
|-------|-------|------|
| 4.7µF | 10µH  | 3.3V |
| 4.7µF | 4.7µH | 5V   |
| 4.7µF | 2.2µH | 12V  |
| 4.7µF | 2.2µH | 15V  |

C1 = MLCC

L1 = SMD Inductor

### Package Style and Pinning (mm)

#### 5 PINS Single SMD Package




#### Pin Connections

| Pin # | Single | Dual   |
|-------|--------|--------|
| 1     | -Vin   | -Vin   |
| 2     | +Vin   | +Vin   |
| 4     | -Vout  | Com.   |
| 5     | +Vout  | -Vout  |
| 7     | No Pin | +Vout  |
| 8     | NC     | No Pin |
| 10    | No Pin | NC     |

NC= No Connection


UNIT: mm  
TOL.:  $\pm 0.25$  mm

#### 6 PINS Dual SMD Package

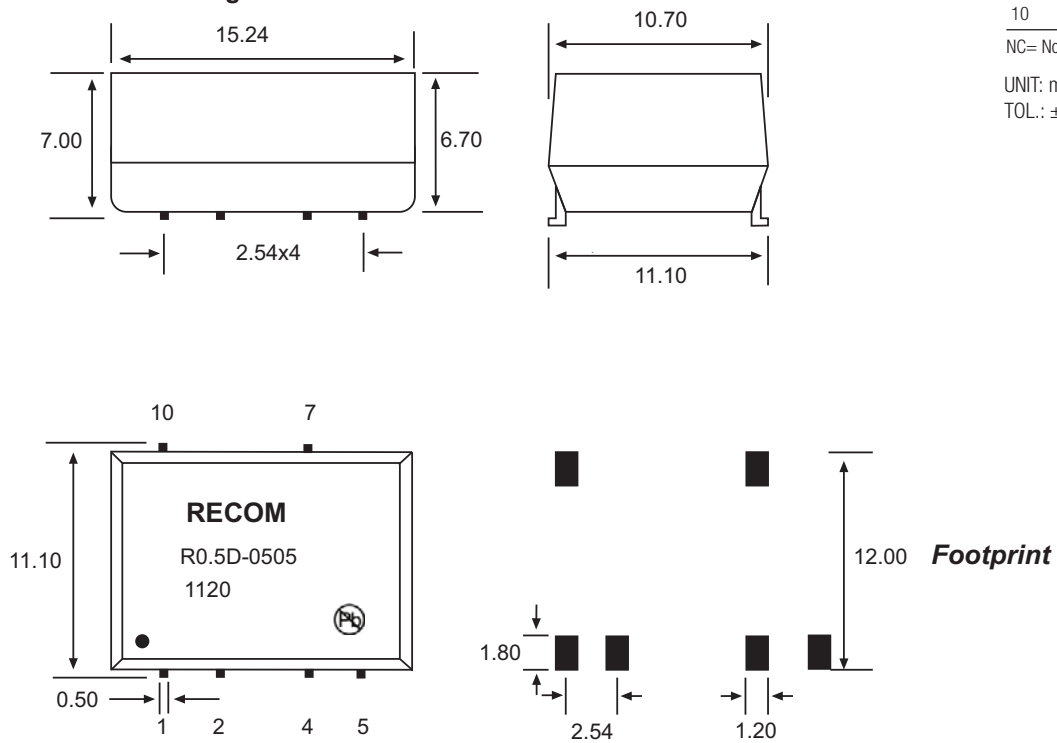

### Package Style and Pinning (mm)

#### 8 PINS Single SMD Package

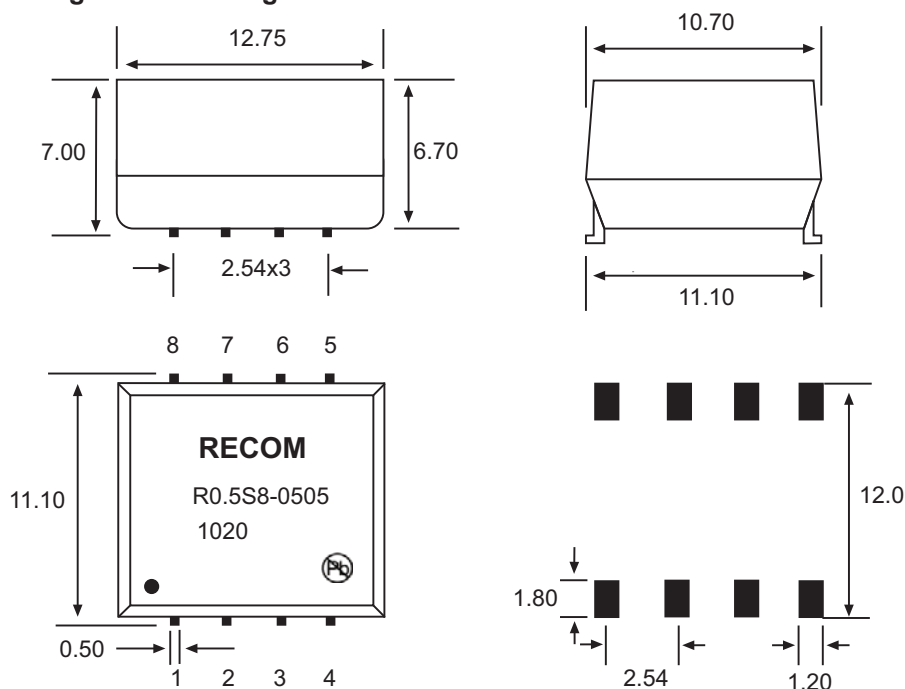

#### Footprint

##### Pin Connections


| Pin #   | Single | Dual  |
|---------|--------|-------|
| 1       | -Vin   | -Vin  |
| 2       | +Vin   | +Vin  |
| 4       | -Vout  | Com.  |
| 5       | +Vout  | -Vout |
| 7       | NC     | +Vout |
| 3, 6, 8 | NC     | NC    |
| 9, 10   | No Pin | NC    |

NC= No Connection

UNIT: mm

TOL.: ± 0.25 mm

#### 10 PINS Dual SMD Package

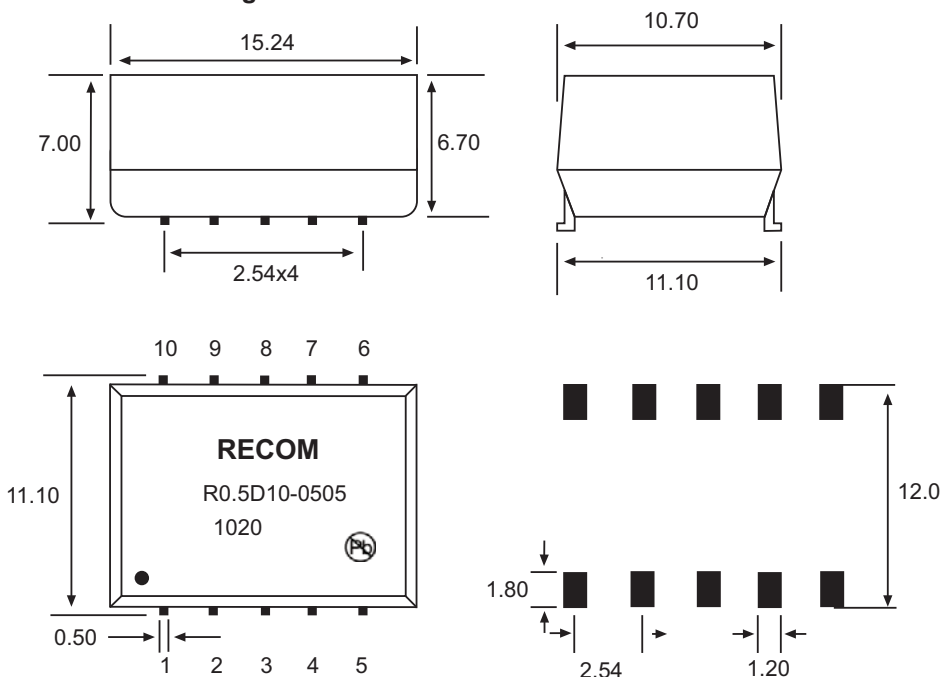

#### Footprint

# ECONOLINE

DC/DC-Converter

# R0.5S\_D Series

## Package Style and Pinning (mm)

### 12 PINS Dual SMD Package




#### Pin Connections

| Pin #        | Function Single | Function Dual |
|--------------|-----------------|---------------|
| 1            | -Vin            | -Vin          |
| 2            | +Vin            | +Vin          |
| 5            | -Vout           | Com.          |
| 6            | NC              | -Vout         |
| 8            | +Vout           | +Vout         |
| 3,7,10,11,12 | NC              | NC            |

NC= No Connection

Unit: mm

TOL.: ± 0.25 mm

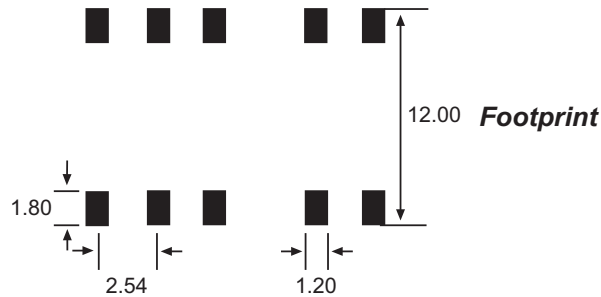

**Footprint**

R0.5S\_D



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.