

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

© COPYRIGHT - By -

ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS							
		P	LTR	DESCRIPTION			DATE	DWN	APVD
—	—		H2	REVISED PER ECO-11-004587			11MAR11	RK	HMR

D

C

B

A

—	—	—	—	—	—	—	—	—	—	—	—	—	—	180.7	188.2	18	1-1546306-8
—	—	—	—	—	—	—	—	—	—	—	—	—	—	171.2	178.7	17	1-1546306-7
—	—	—	—	—	—	—	—	—	—	—	—	—	—	161.7	169.2	16	1-1546306-6
	—	—	—	—	—	—	—	—	—	—	—	—	—	152.2	159.7	15	6-1546306-2
—	—	—	—	—	—	—	—	—	—	—	—	—	—	152.2	159.7	15	1-1546306-5
—	—	—	—	—	—	—	—	—	—	—	—	—	—	142.7	150.2	14	1-1546306-4
—	—	—	—	—	—	—	—	—	—	—	—	—	—	133.2	140.7	13	1-1546306-3
	—	—	—	—	—	—	—	—	—	—	—	—	—	123.7	131.2	12	4-1546306-0
	—	—	—	—	—	—	—	—	—	—	—	—	—	123.7	131.2	12	3-1546306-3
—	—	—	—	—	—	—	—	—	—	—	—	—	—	123.7	131.2	12	1-1546306-2
	—	—	—	11	—	—	—	—	—	—	—	—	—	114.2	121.7	11	5-1546306-2
	—	—	—	—	2	—	—	—	—	11	—	—	—	114.2	121.7	11	3-1546306-4
	—	—	—	—	—	—	—	—	—	11	—	—	—	114.2	121.7	11	3-1546306-1
—	—	—	—	—	—	—	—	—	—	—	—	—	—	114.2	121.7	11	1-1546306-1
	—	—	—	—	—	—	—	—	10	3	—	—	—	104.7	112.2	10	6-1546306-0
	—	—	—	—	—	—	—	—	—	—	—	—	—	104.7	112.2	10	5-1546306-8
—	—	—	—	—	—	—	—	—	—	—	—	—	—	104.7	112.2	10	1-1546306-0
	4	9	—	—	—	—	—	—	—	—	—	—	—	95.2	102.7	9	6-1546306-3
	—	—	—	—	—	—	—	—	—	—	—	—	—	95.2	102.7	9	5-1546306-6
—	—	—	—	—	—	—	—	—	—	—	—	—	—	95.2	102.7	9	1546306-9
—	—	—	—	—	—	—	—	—	8	—	—	—	—	85.7	93.2	8	5-1546306-9
	—	—	—	—	—	—	—	—	—	—	—	—	—	85.7	93.2	8	3-1546306-9
—	—	—	—	—	—	—	—	—	—	—	—	—	—	85.7	93.2	8	1546306-8
	—	—	—	—	—	—	—	—	—	—	—	—	—	76.2	83.7	7	5-1546306-5
	—	—	—	—	1	—	—	7	—	—	—	—	—	76.2	83.7	7	5-1546306-0
—	—	—	—	—	—	—	—	—	—	—	7	7	7	76.2	83.7	7	4-1546306-5
	—	—	—	—	—	—	—	—	—	7	—	—	—	76.2	83.7	7	3-1546306-7
—	—	—	—	—	—	—	—	—	—	—	—	—	—	76.2	83.7	7	1546306-7
	—	—	—	—	—	—	—	—	—	—	—	—	—	66.7	74.2	6	5-1546306-4
	—	—	—	—	—	—	1	6	—	—	—	—	—	66.7	74.2	6	4-1546306-9
—	—	—	—	—	—	6	—	—	—	—	—	—	—	66.7	74.2	6	4-1546306-8
—	—	—	—	—	—	—	—	—	—	—	6	6	6	66.7	74.2	6	4-1546306-4
	—	—	—	—	—	—	—	—	—	6	—	—	—	66.7	74.2	6	3-1546306-6
—	—	—	—	—	—	—	—	—	—	—	—	—	—	66.7	74.2	6	1546306-6
	—	—	—	—	—	—	—	—	5	—	—	—	—	57.2	64.7	5	5-1546306-7
	5	5	—	—	—	—	—	—	—	—	—	—	—	57.2	64.7	5	5-1546306-3
SCREW ON ONE SIDE	—	—	—	—	—	—	—	—	—	—	—	—	—	57.2	64.7	5	4-1546306-7
—	—	—	—	—	—	—	—	—	—	—	5	5	5	57.2	64.7	5	4-1546306-3
	—	—	—	—	—	—	—	—	—	—	5	—	—	57.2	64.7	5	3-1546306-5
—	—	—	—	—	—	—	—	—	—	—	—	—	—	57.2	64.7	5	1546306-5
	—	—	—	—	—	—	—	—	—	—	—	4	4	4	4	4	4-1546306-2
—	—	—	—	—	—	—	—	—	—	—	—	—	—	47.7	55.2	4	3-1546306-8
—	—	—	—	—	—	—	—	—	—	—	—	—	—	47.7	55.2	4	1546306-4
—	3	3	—	—	—	—	—	—	—	—	—	—	—	38.2	45.7	3	6-1546306-1
—	—	—	—	—	—	—	—	—	—	—	—	—	—	38.2	45.7	3	5-1546306-1
—	—	—	—	—	—	—	—	—	—	—	—	—	—	38.2	45.7	3	1546306-3
	—	—	—	—	—	—	—	—	2	2	2	—	—	28.7	36.2	2	4-1546306-6
—	—	—	—	—	—	2	2	2	—	—	—	—	—	28.7	36.2	2	4-1546306-1
—	—	—	—	—	—	—	—	—	—	—	—	—	—	28.7	36.2	2	1546306-2

NOTES

13 QC TAB .187 SS FLAT

12 QC TAB .187 SS FLAT

11 QC TAB .187 SS 90°

10 JUMPER

9 QC TAB DBL SIDE 90° .250

8 QC TAB DBL SIDE 45° .250

7 QC TAB DBL SIDE FLAT .250

6 QC TAB DBL SIDE 90° .187

5 QC TAB DBL SIDE 45° .187

4 QC TAB DBL SIDE FLAT .187

3 QC TAB SGL SIDE 90° .250

2 QC TAB SGL SIDE 45° .250

1 QC TAB SGL SIDE FLAT .250

DIM B

DIM A

NO. OF POS.

PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: MM

MATERIAL

—

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ± -

1 PLC ± 0.3

2 PLC ± 0.25

3 PLC ± -

4 PLC ± -

ANGLES ± 2°

FINISH

—

DWN S SCHLEGEL

CHK C RICHARD

APVD C RICHARD

PRODUCT SPEC

APPLICATION SPEC

—

WEIGHT

—

CUSTOMER DRAWING

20AUG2002

8/20/02

8/20/02

—

—

—

—

—

—

TE Connectivity

9.50MM (.374) DBL ROW BARRIER STRIP W/O WASHER

SIZE A2

CAGE CODE 00779

DRAWING NO C=1546306

RESTRICTED TO

SCALE NTS

SHEET 1 OF 3

REV H2

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
—	—		—	SEE SHEET 1	—	—	—

- PHYSICAL PROPERTIES:
HOUSING MATERIAL: THERMOPLASTIC, PC
FLAMMABILITY: UL94V-0 COLOR: BLACK
MAX BOW/WARP: .0056 IN/IN.

TERMINAL:
TERMINALS: BRASS, TIN PLATED
SCREWS: 6-32, STEEL, NICKEL PLATED

MECHANICAL:
PITCH (TERMINAL SPACING): 9.50mm(.374")
WIRE RANGE: 12-22 AWG
RECOMMENDED TIGHTENING TORQUE: 12IN-LBS MAX.

ELECTRICAL PROPERTIES:
MAXIMUM CURRENT: 20A
OPERATING VOLTAGE: 300V

ENVIRONMENTAL PROPERTIES:
OPERATING TEMP RANGE: -40°C TO +120°C.
- 1 SEE FIGURE.

2 MARKED WITH WHITE INK.

3 PRELIMINARY PART NUMBER.

4 SCREWS AND TERMINALS ARE NICKEL PLATED BRASS.

5 STAINLESS STEEL SCREWS.

6 SCREWS ARE NICKEL PLATED BRASS.

7 WIRE CLAMP SCREWS TO BE USED ONLY ON SIDE OPPOSITE QC TABS.

8 TE CONNECTIVITY LOGO LOCATED APPROXIMATE AREA SHOWN.

-- SELECT LOAD CHART --

—	—	4–5,5–6	—	—	—	—	ALL	—	—	—	—	11	3–1546306–4
—	—	—	—	—	—	ALL	1–3	—	—	—	—	10	6–1546306–0
—	—	1,2	—	—	ALL	—	—	—	—	—	—	7	5–1546306–0
—	—	—	—	1	ALL	—	—	—	—	—	—	6	4–1546306–9
⑫ QC TAB .187 SS FLAT	⑪ QC TAB .187 SS 90°	⑩ JUMPER	⑨ QC TAB DBL SIDE 90° .250	⑧ QC TAB DBL SIDE 45° .250	⑦ QC TAB DBL SIDE FLAT .250	⑥ QC TAB DBL SIDE 90° .187	⑤ QC TAB DBL SIDE 45° .187	④ QC TAB DBL SIDE FLAT .187	③ QC TAB SGL SIDE 90° .250	② QC TAB SGL SIDE 45° .250	① QC TAB SGL SIDE FLAT .250	NO. OF POS.	PART NUMBER
POSITIONS LOADED													

-	-	-	-	-	-	-	-	-	-	-	-	-	-	294.7	302.2	30	3-1546306-0
-	-	-	-	-	-	-	-	-	-	-	-	-	-	285.2	292.7	29	2-1546306-9
-	-	-	-	-	-	-	-	-	-	-	-	-	-	275.7	283.2	28	2-1546306-8
-	-	-	-	-	-	-	-	-	-	-	-	-	-	266.2	273.7	27	2-1546306-7
-	-	-	-	-	-	-	-	-	-	-	-	-	-	256.7	264.2	26	2-1546306-6
-	-	-	-	-	-	-	-	-	-	-	-	-	-	247.2	254.7	25	2-1546306-5
-	-	-	-	-	-	-	-	-	-	-	-	-	-	237.7	245.2	24	2-1546306-4
-	-	-	-	-	-	-	-	-	-	-	-	-	-	228.2	235.7	23	2-1546306-3
-	-	-	-	-	-	-	-	-	-	-	-	-	-	218.7	226.2	22	2-1546306-2
-	-	-	-	-	-	-	-	-	-	-	-	-	-	209.2	216.7	21	2-1546306-1
1 2 SPL MARKING	-	-	-	-	-	-	-	-	-	-	-	-	-	199.7	207.2	20	3-1546306-2
-	-	-	-	-	-	-	-	-	-	-	-	-	-	199.7	207.2	20	2-1546306-0
-	-	-	-	-	-	-	-	-	-	-	-	-	-	190.2	197.7	19	1-1546306-9

NOTES

13 QC TAB .187 SS FLAT

12 QC TAB .187 SS FLAT

11 QC TAB .187 SS 90°

10 JUMPER

9 QC TAB DBL SIDE 90° .250

8 QC TAB DBL SIDE 45° .250

7 QC TAB DBL SIDE FLAT .250

6 QC TAB DBL SIDE 90° .187

5 QC TAB DBL SIDE 45° .187

4 QC TAB DBL SIDE FLAT .187

3 QC TAB SGL SIDE 90° .250

2 QC TAB SGL SIDE 45° .250

1 QC TAB SGL SIDE FLAT .250

DIM B

DIM A

NO. OF POS.

PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: MM

MATERIAL -

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ± -
1 PLC ± 0.3
2 PLC ± 0.25
3 PLC ± -
4 PLC ± -
ANGLES ± 2°
FINISH -

DWN S SCHLEGEL
CHK C RICHARD
APVD C RICHARD
PRODUCT SPEC -
APPLICATION SPEC -
WEIGHT -

20AUG2002
8/20/02
8/20/02

TE Connectivity

9.50MM (.374) DBL ROW BARRIER STRIP W/O WASHER

SIZE A2CAGE CODE 00779DRAWING NO C=1546306RESTRICTED TO -




CUSTOMER DRAWING

SCALE NTS




SHEET 2 OF 3

REV H2



D

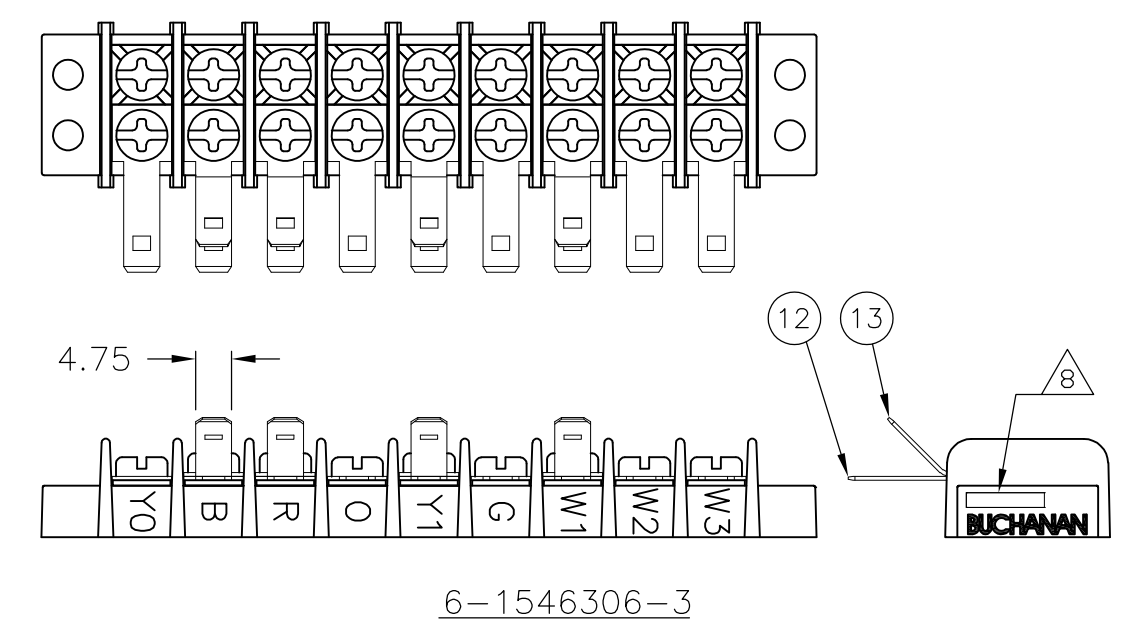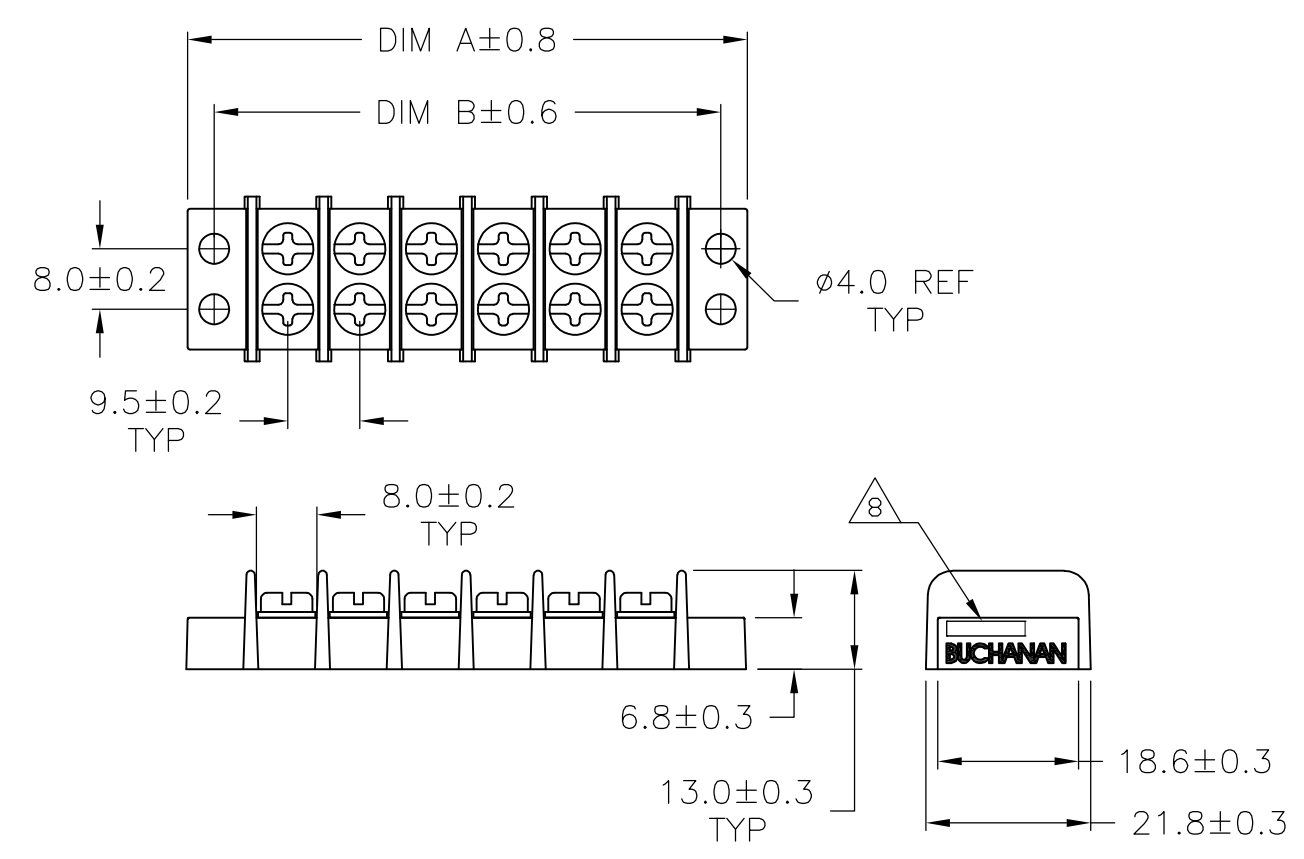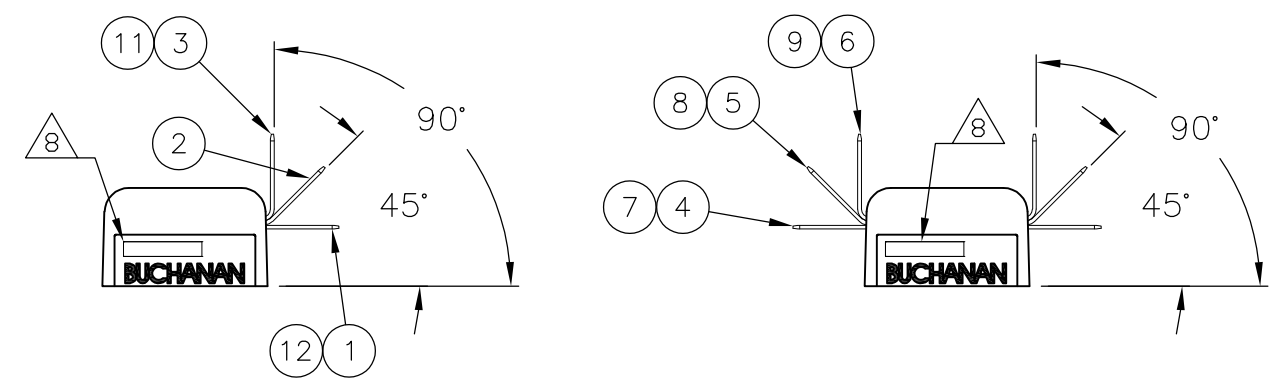


C

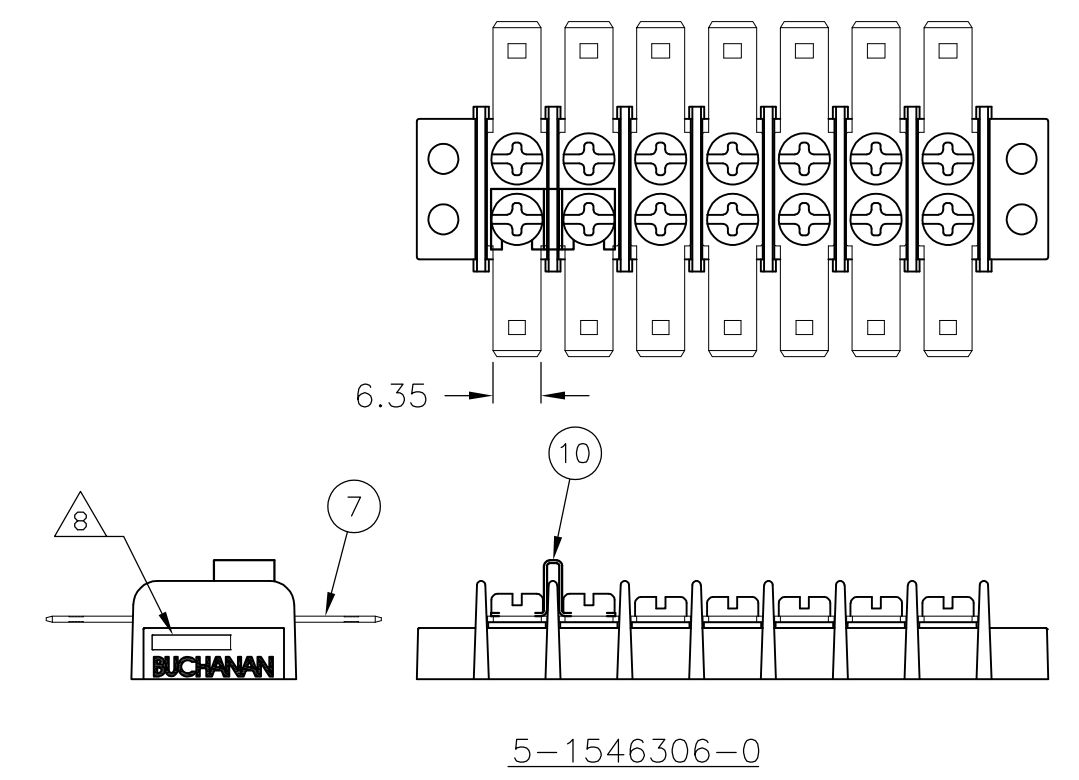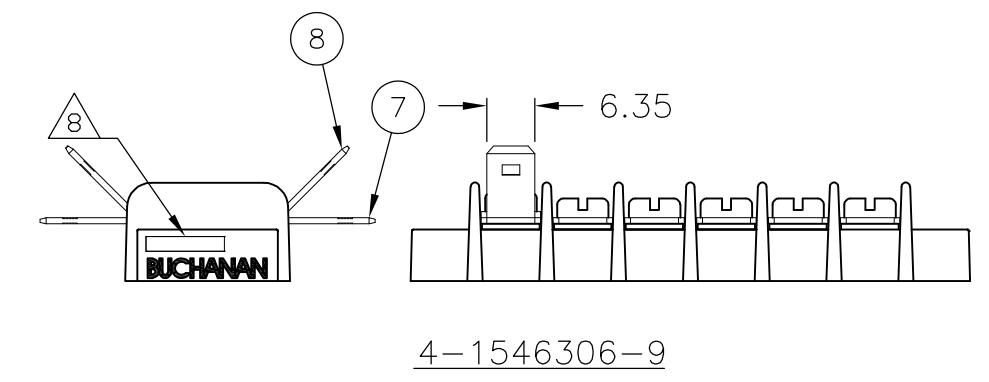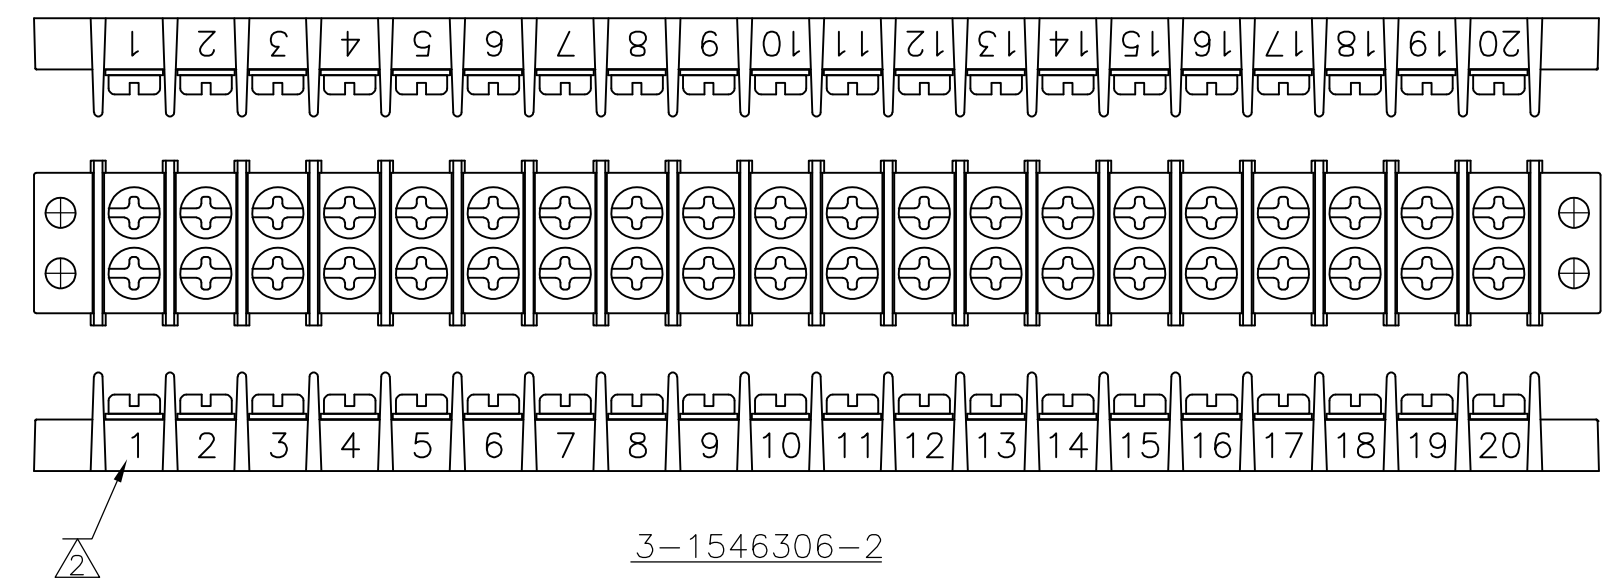

B

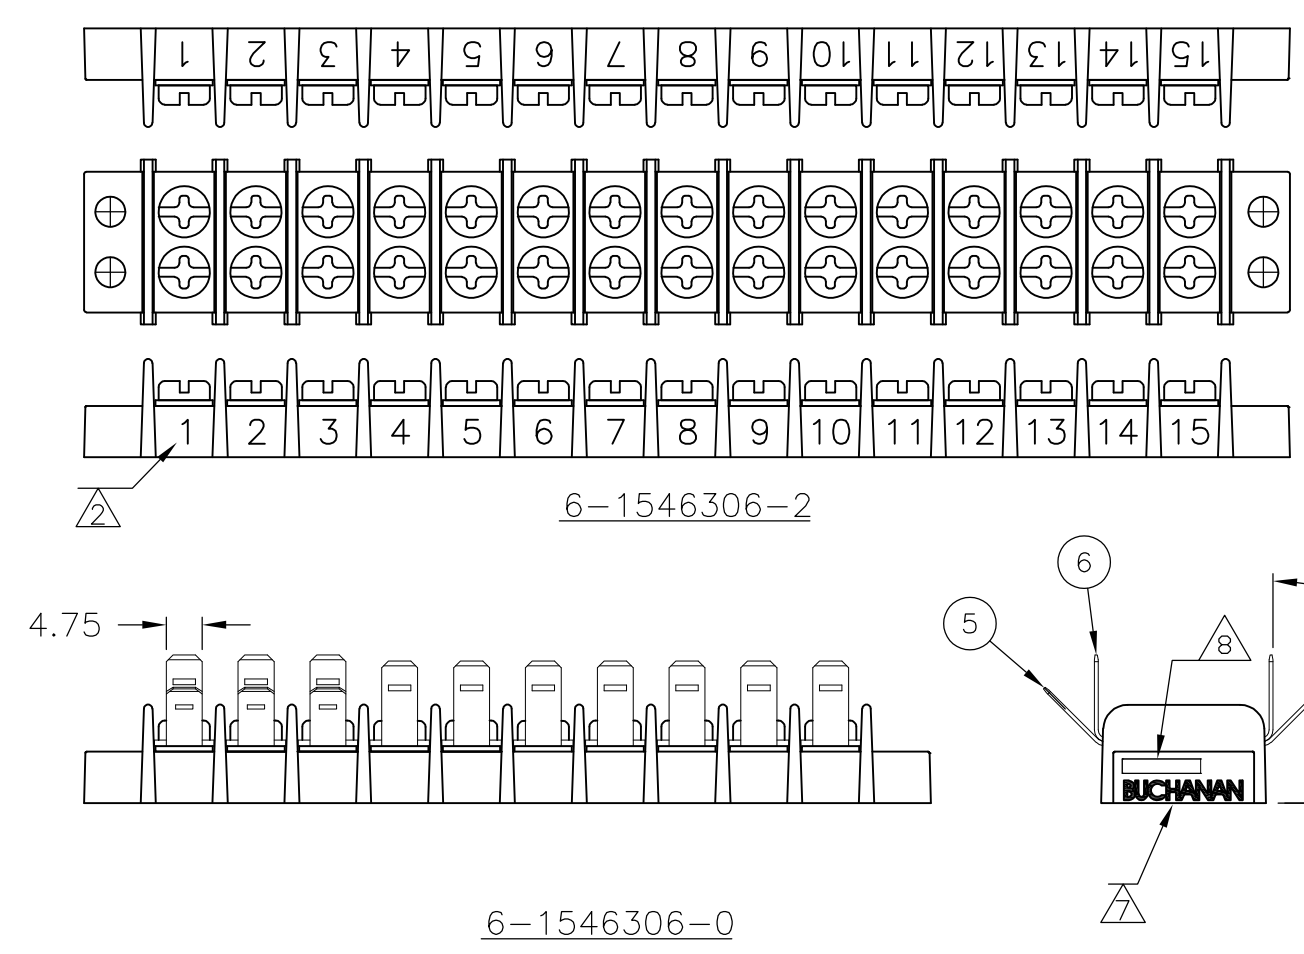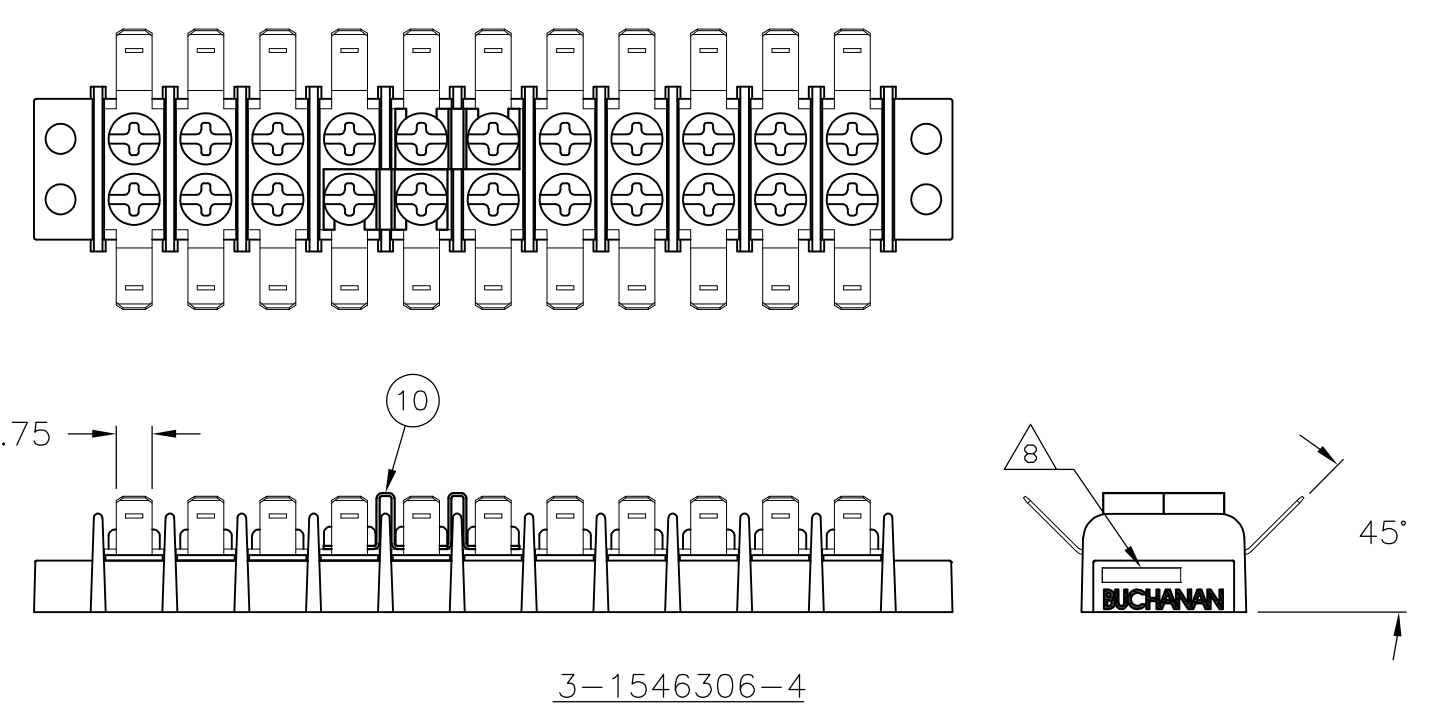

A

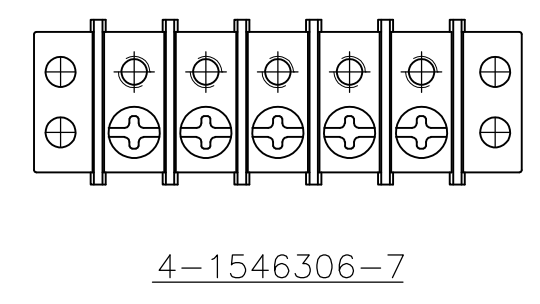

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
MM

MATERIAL
—

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC	±	—
1 PLC	±	0.3
2 PLC	±	0.25
3 PLC	±	—
4 PLC	±	—
ANGLES	±	2°
FINISH	—	—

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN
S SCHLEGEL
CHK
C RICHARD
APVD
C RICHARD
PRODUCT SPEC
APPLICATION SPEC
WEIGHT
—
CUSTOMER DRAWING

20AUG2002
8/20/02
8/20/02
—
—
—
—

TE Connectivity

NAME
9.50MM (.374) DBL ROW BARRIER STRIP
W/O WASHER
—

SIZE
A2

CAGE CODE
00779

DRAWING NO
C=1546306

RESTRICTED TO
—

SCALE
NTS

SHEET
3 OF 3

REV
H2



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.