


Product Brief

Intel® Ethernet Converged Network Adapters XL710
With Support for QSFP+ Connections
Network Connectivity



Intel® Ethernet Converged Network Adapters XL710 10/40 GbE

Extending Intel® Virtualization Technology beyond Server Virtualization to the Network with Hardware Optimizations and Offloads for the Rapid Provisioning of Networks in an Agile Data Center

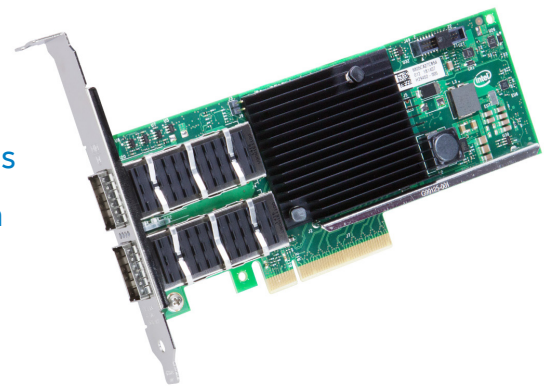

Key Features

- Single- and dual-port 40 GbE adapters
- PCI Express* (PCIe) 3.0, x8
- Exceptional Low Power Adapters
- Network Virtualization offloads including VXLAN, NVGRE, Geneve, Network Service Headers (NSH)³
- Intel® Ethernet Flow Director for hardware-based application traffic steering
- Intel® Data Plane Developer Kit (DPDK) optimized for efficient packet processing
- Excellent small packet performance for network appliances and Network Function Virtualization (NFV)
- Intelligent offloads to enable high performance with Intel® Xeon® processor-based servers
- I/O virtualization innovations for maximum performance in a virtualized server
- Unified networking providing a single wire support for LAN and storage: NAS (SMB, NFS) and SAN (iSCSI)

Product Overview

Intel continues its legacy of Ethernet leadership by introducing a 10/40 gigabit family of adapters powered by, the Intel® Ethernet XL710 Controller, codenamed Fortville.

The XL710 adapter family addresses the demanding needs of the next-generation agile data center by providing unmatched features for both server and network virtualization, flexibility for LAN and SAN networks, and proven, reliable performance.

Leading 10/40 GbE Performance

Optimized performance vectors (and key uses) include:

- **Small Packet Performance:** Maintains wire-rate throughput on smaller payload sizes (>128 Bytes for 40 GbE and >64 Bytes for 10 GbE)
- **Bulk Transfer Performance:** Delivers line-rate performance with low CPU usage for large application buffers
- **Virtualized Performance:** Alleviates hypervisor I/O bottlenecks by providing flow separation for Virtual Machines (VMs)
- **Network Virtualization:** Network virtualization overlay offloads including VXLAN, NVGRE, Geneve, Network Service Headers (NSH)³
- **Storage Performance:** Enables competitive performance with native OS drivers and intelligent offload for NAS (NFS, SMB), and SAN (iSCSI)

A Complete, Unified Networking Solution

Converging data and storage onto one fabric eliminates the need for multiple adapters, cables, and switches. Furthermore both 10 and 40 gigabit Ethernet provides the bandwidth to converge these multiple fabrics onto a single wire. A key capability that makes all this possible is traffic class separation provided by Data Center Bridging (DCB)¹—providing a one-wire solution with virtual pipes for the different classes of traffic:

- **Data:** Best effort delivery of standard LAN traffic
- **Storage:** Lossless network for iSCSI
- **Management:** Guaranteed connectivity of data center IP management

One Adapter, One Price

With the Intel adapters, iSCSI support is included in the price of an adapter. There is no need to purchase multiple adapters or additional licensing for an XL710 adapter. It's simple and easy. Everything you need to unify your networking is included in a single SKU. One adapter, one price.

Power Savings

Power efficiency is critical to IT specialists as energy consumption is a real OpEx concern.

- **Lowest Power Consumption:** The new generation of XL710 adapters are power misers. They deliver double the throughput with only half the power of the previous X520 generation.
- **Energy Efficient Ethernet (EEE):** Reduces power consumption during periods of low data activity. Energy is used to maintain the physical layer transmitters in a “ready state” to transmit data on the wire. During periods of low data traffic, EEE sends a low-power-idle signal to put the transmitters into a “low power state” saving power and cost. When data needs to be sent, EEE sends a normal idle signal to wake up the transmit system before data is due to be sent so there is no degradation of performance.

Server Virtualization

With Intel® Virtualization Technology (Intel® VT), the XL710 family of adapters deliver outstanding I/O performance in virtualized server environments. They reduce I/O bottlenecks by providing intelligent offloads for networking traffic per virtual machine (VM), enabling near-native performance and VM scalability. The host-based virtualization technologies supported by Intel VT include:

- **VMDq for Emulated Path:** Adapter-based VM Queue sorting enabling efficient hypervisor-based switching

- **SR-IOV for Direct Assignment:** Adapter-based isolation and switching for various virtual station instances enabling optimal CPU usage in virtualized environments

Additionally, XL710 adapters provide Virtual Bridging¹ support that delivers both host-side and switch-side control and management of virtualized I/O as well as the following modes of virtualized operation:

- **VEPA¹:** IEEE 802.1Qbg support for Virtual Ethernet Port Aggregator¹
- **VEB:** Virtual Ethernet Bridge support via Intel VT

Network Virtualization

Network virtualization is the next big trend in creating an agile data center. The family of XL710 adapters are ready to help you take that next step.

- **VXLAN, NVGRE, Geneve, NSH Offloads³:** These stateless offloads preserve application performance for overlay networks. With these offloads it is possible to distribute network traffic across CPU cores.

At the same time XL710 offloads LSO, GSO, and checksum from the host software reducing CPU overhead.

Intel® Ethernet Flow Director

Flow Director is an advanced traffic steering capability built into the XL710 controller. It consists of a large number of flow affinity filters that direct received packets by their flows to queues for classification, load balancing, and matching between flows and CPU cores. It eliminates context switching required within the CPU. As a result, Flow Director significantly increases the number of transactions per second and reduces latency for cloud applications like Memcached.

Intelligent Offloads

The Intel® Xeon® processor family has demonstrated increased computing performance and increased integration of key server subsystems generation after generation. To offload is to leverage the ever-escalating computing power of the Intel Xeon processor where appropriate and implement complementary accelerations in the network controller—this is what Intel refers to as “intelligent offloads.” By employing a balanced hybrid of compute and offload, intelligent offloads are able to achieve the optimized point of performance and efficiency. This is most notably observed in the following usage models:

- **TCP Stateless Offloads:** Demonstrates leading performance vs. TOE solutions without restricting feature usage (TOE usage usually requires that key features be disabled). Supported stateless offloads include Checksum, TSO, VMDq, and RSS.

- **Host iSCSI Initiator:** Provides exceptional performance without the need for full-offload HBA methods.
- **Flow Classification:** Trafficking data flows across multiple consumers and connections.

Manageability

The XL710 family of adapters also incorporate the manageability required by IT personnel for remote control and alerting. Communication to the Board Management

Controller (BMC) is available either through an on-board SMBus port or the DMTF-defined NC-SI, providing a variety of management protocols, including IPMI, BMC Pass-thru, OS2BMC, and MCTP/SMBus and MCTP/PCIe.

World-Class Intel Support

Intel Customer Support Services offers a broad selection of technical and customer support programs. For more information, contact your local Intel representative. Service and availability may vary by country.

| GENERAL | |
|---|---|
| FEATURES | BENEFITS |
| Intel® XL710 10/40 Gigabit Ethernet Controller | <ul style="list-style-type: none"> • Industry-leading, energy-efficient design for next-generation 10/40 Gigabit performance and multi-core processors |
| QSFP+ Connectivity | <ul style="list-style-type: none"> • XL710 adapters with QSFP+ connections support 40GBASE-SR4, 40GBASE-LR4¹ and QSFP+ CR4 Copper Direct Attach physical media. |
| Low-profile | <ul style="list-style-type: none"> • Enables higher bandwidth and throughput from standard and low-profile PCIe slots and servers |
| Load balancing on multiple CPUs | <ul style="list-style-type: none"> • Increases performance on multi-processor systems by efficiently balancing network loads across CPU cores when used with Receive-Side Scaling (RSS) from Microsoft or Scalable I/O on Linux* |
| iSCSI remote boot support | <ul style="list-style-type: none"> • Provides centralized storage area network (SAN) management at a lower cost than other iSCSI solutions • No additional cost for iSCSI support, included in standard adapter |
| Support for most network operating systems | <ul style="list-style-type: none"> • Enables widespread deployment |
| RoHS-compliant | <ul style="list-style-type: none"> • Complies with the European Union directive 2011/65/EU to reduce the use of hazardous materials |
| Intel® PROSet Utility for Windows* Device Manager | <ul style="list-style-type: none"> • Provides point-and-click management of individual adapters, advanced adapter features, connection teaming, and virtual local area network (VLAN) configuration |
| Time Sync (IEEE 1588*, 802.1as) | <ul style="list-style-type: none"> • Enables networked Ethernet equipment to synchronize internal clocks according to a network master clock; endpoint can then acquire an accurate estimate of the master time by compensating for link latency |

| I/O FEATURES FOR MULTI-CORE PROCESSOR SERVERS | |
|---|--|
| FEATURES | BENEFITS |
| Intel® Flow Director | <ul style="list-style-type: none"> • An advanced traffic steering capability increases the number of transactions per second and reduces latency for cloud applications like Memcached |
| MSI-X support | <ul style="list-style-type: none"> • Minimizes the overhead of interrupts • Load-balancing of interrupt handling between multiple cores/CPU's |
| Multiple Queues: 1,536 Tx and Rx queues per port | <ul style="list-style-type: none"> • Network packet handling without waiting for buffer overflow providing efficient packet prioritization • Actual number of queues will vary depending upon software implementation |
| Tx/Rx IP, SCTP, TCP, and UDP checksum offloading (IPv4, IPv6) capabilities | <ul style="list-style-type: none"> • Lower processor usage • Checksum and segmentation capability extended to new standard packet type |
| VIRTUALIZATION FEATURES | |
| FEATURES | BENEFITS |
| Next-Generation VMDq | <ul style="list-style-type: none"> • Up to 256 maximum VMDq VMs supported • Enhanced QoS feature by providing weighted round-robin servicing for the Tx data • Offloads the data-sorting functionality from the Hypervisor to the network silicon, improving data throughput and CPU usage • Provides QoS feature on the Tx data by providing round-robin servicing and preventing head-of-line blocking • Sorting based on MAC addresses and VLAN tags • Provides loopback functionality, where data transfer between the virtual machines within the same physical server need not go out to the wire and come back in, improving throughput and CPU usage |
| PC-SIG SR-IOV Implementation (128 per device) | <ul style="list-style-type: none"> • Provides an implementation of the PCI-SIG standard for I/O Virtualization. The physical configuration of each port is divided into multiple virtual ports. Each virtual port is assigned to an individual virtual machine directly by bypassing the virtual switch in the Hypervisor, resulting in near-native performance. • Integrated with Intel® VTI for Directed I/O (VT-d) to provide data protection between virtual machines by assigning separate physical addresses in the memory to each virtual machine • 64/port for dual port • 32/port for quad port |
| Virtual Machine Load Balancing (VLMB) | <ul style="list-style-type: none"> • Virtual Machines Load Balancing (VMLB) provides traffic load balancing (Tx and Rx) across Virtual Machines bound to the team interface, as well as fault tolerance in the event of switch, port, cable, or adapter failure |
| Advanced Packet Filtering | <ul style="list-style-type: none"> • 1536 exact matched packets (unicast or multicast) • 512 hash entries each for unicast and multicast • Lower processor usage • Promiscuous (unicast and multicast) transfer mode support • Optional filtering of invalid frames |
| VLAN support with VLAN tag insertion, stripping, and packet filtering for up to 4096 VLAN tags | <ul style="list-style-type: none"> • Ability to create multiple VLAN segments |
| VXLAN and NVGRE Support | <ul style="list-style-type: none"> • Preserves application performance in network virtualized environments |
| MANAGEABILITY FEATURES | |
| FEATURES | BENEFITS |
| Preboot eXecution Environment (PXE) Support | <ul style="list-style-type: none"> • Enables system boot up via the LAN (32-bit and 64-bit) • Flash interface for PXE image |
| Simple Network Management Protocol (SNMP) and Remote Network Monitoring (RMON) Statistic Counters | <ul style="list-style-type: none"> • Easy system monitoring with industry-standard consoles |
| iSCSI Boot ¹ | <ul style="list-style-type: none"> • Enables system boot up via iSCSI • Provides additional network management capability |
| Watchdog Timer | <ul style="list-style-type: none"> • Gives an indication to the manageability firmware or external devices that the chip or the driver is not functioning |

SPECIFICATIONS

GENERAL

| | |
|---|--|
| Connections | Single or Dual QSFP+ cages for: <ul style="list-style-type: none"> • QSFP+ SR4 fiber-optic transceivers • QSFP+ LR4 fiber-optic transceivers • QSFP+ CR4 Direct Attach Cables |
| Intel® Ethernet QSFP+ Optics required for a fiber configuration | |
| Network Standards | IEEE 802.3: |
| Physical Layer Interface | <ul style="list-style-type: none"> • 40GBASE-SR4 • 40GBASE-LR4 SFF-8431: <ul style="list-style-type: none"> • 40GSFP+ CR4 (Direct Attach Copper) • 40GSFP+ CR4 to 4x SFP+ (Breakout Cable) |

ADVANCED SOFTWARE FEATURES – ALL ADAPTERS

| |
|--|
| Adapter fault tolerance (AFT) |
| Switch fault tolerance (SFT) |
| Adaptive load balancing (ALB) |
| Teaming Support |
| IEEE 802.3ad (link aggregation control protocol) |
| PCIe Hot Plug*/Active peripheral component interconnect (PCI) |
| IEEE 802.1Q* VLANs |
| IEEE 802.3 2005* flow control support |
| Tx/Rx IP, TCP, & UDP checksum offloading (IPv4, IPv6) capabilities (Transmission control protocol (TCP), user datagram protocol (UDP), Internet protocol (IP)) |
| IEEE 802.1p* |
| TCP segmentation/large send offload |
| MSI-X supports Multiple Independent Queues |
| Interrupt moderation |
| IPv6 offloading—Checksum and segmentation capability extended to new standard packet type |

TECHNICAL FEATURES

| | |
|-----------------------|---|
| Operating temperature | 0 °C to 55 °C (32 °F to 131 °F) |
| Air Flow | Minimum of 150 LFM required |
| Storage temperature | -40 °C to 70 °C (-40 °F to 158 °F) |
| Storage humidity | Maximum: 90% non-condensing relative humidity at 35 °C |
| LED Indicators | LINK (solid) and ACTIVITY (blinking) LINK SPEED (green=10 Gbps; yellow=1 Gbps) |

Physical Dimensions

| | |
|--------------------------------|---|
| XL710 DA2 Low-profile PCIe* | 2.703 in. x 6.578 in. |
| Data rate supported per port | <ul style="list-style-type: none"> • Optical: 10 GbE/40 GbE • Direct Attach: 40 GbE |
| Bus type | PCI Express 3.0 (8 GT/s) |
| Bus width | 4-lane PCI Express* and 8-lane PCI Express |
| Interrupt levels | INTA, MSI, MSI-X |
| Hardware certifications | FCC B, UL, CE, VCCI, BSMI, CTICK, KCC |

| | | |
|--------------------------|--------------------------------------|------------------|
| Controller-processor | Intel® Ethernet Controller XL710-AM2 | |
| Power Consumption | | |
| SKU | TYPICAL POWER | MAX POWER |
| Single-port 40GBASE-SR4 | 4.2W | 4.6W |
| Single-port 40GBASE-CR4 | 3.4W | 3.8W |
| Dual-port 40GBASE-SR4 | 4.9 W | 5.6W |
| Dual-port 40GBASE-CR4 | 3.6 W | 4.0W |

NETWORK OPERATION SYSTEM (NOS) SUPPORT – ALL ADAPTERS

| OPERATING SYSTEM | IA-32 | X86-64 | IA-64 |
|--|-------|--------|-------|
| Windows Server 2012 R2* | N/A | X | N/A |
| Windows Server 2012 R2 Core | N/A | X | N/A |
| Windows Server 2012 | N/A | X | N/A |
| Windows Server 2012 Core | N/A | X | N/A |
| Windows Server 2008 R2* | N/A | X | N |
| Windows Server 2008 R2 Core | N/A | X | N |
| Linux* Stable Kernel version 2.6.32/3x | X | X | X |
| Linux RHEL 6.5 and RHEL 7.0 | X | X | X |
| Linux SLES 11 SP3 and SLES 12 | X | X | X |
| FreeBSD* 9 and FreeBSD* 10 | X | X | X |
| UEFI* 2.1 | N/A | X | X |
| UEFI* 2.3 | N/A | X | X |
| VMware ESXi 5.1 ¹ (Limited Functionality) | N/A | X | N/A |
| VMware ESXi 5.5 ¹ | N/A | X | N/A |

INTEL® BACKING INFORMATION

Backed by an Intel limited lifetime warranty, 90-day money-back guarantee (U.S. and Canada), and worldwide support.

INTEL® ETHERNET CONVERGED NETWORK ADAPTER XL710 PRODUCT CODES

| CONFIGURATION | PRODUCT CODE | ADAPTER HEIGHT | BULK SKU |
|---------------|------------------------|----------------|--------------|
| XL710-QDA1 | XL710QDA1 | Low Profile | XL710QDA1BLK |
| XL710-QDA2 | XL710QDA2 ² | Low Profile | XL710QDA2BLK |

INTEL® ETHERNET QSFP+ TWINAXIAL CABLES

| CABLE LENGTH (M) | PRODUCT CODE |
|------------------|--------------|
| 1 | XLDACBL1 |
| 3 | XLDACBL3 |
| 5 | XLDACBL5 |

INTEL® ETHERNET QSFP+ BREAKOUT CABLES¹

| CABLE LENGTH (M) | PRODUCT CODE |
|------------------|--------------|
| 1 | X4DACBL1 |
| 3 | X4DACBL3 |
| 5 | X4DACBL5 |

INTEL® ETHERNET QSFP+ OPTIC PRODUCT CODES

| OPTIC | PRODUCT CODE |
|------------------------|-------------------------|
| SR4 Optic | E40GQSFP5R |
| LR4 Optic ¹ | E40GQSFP4R ¹ |

For Product Information

To speak to a customer service representative, please call 1-800-538-3373 (U.S. and Canada) or visit support.intel.com/support/go/network/contact.htm for the telephone number in your area.

For additional product information on Intel Networking Connectivity products, visit www.intel.com/ethernet

Customer Support

Intel® Customer Support Services offers a broad selection of programs including phone support and warranty service. For more information, contact us at support.intel.com/support/go/network/adapter/home.htm

(Service and availability may vary by country.)

¹ Feature to be enabled in Post-Launch Release.

² XL710-DA2 will only support ONE QSFP+ breakout cable.

³ Network Virtualization Offload availability may vary please check both Intel® Ethernet XL710 10 GbE/40 GbE Controller Feature Software

Support Matrix <https://www-ssl.intel.com/content/dam/www/public/us/en/documents/release-notes/xl710-ethernet-controller-feature-matrix.pdf> and Operating System Vendor enablement schedules.

Intel may make changes to specifications and product descriptions at any time, without notice. Designers must not rely on the absence or characteristics of any features or instructions marked "reserved" or "undefined." Intel reserves these for future definition and shall have no responsibility whatsoever for conflicts or incompatibilities arising from future changes to them. The information here is subject to change without notice. Do not finalize a design with this information.

The products described in this document may contain design defects or errors known as errata which may cause the product to deviate from published specifications.

Current characterized errata are available on request. Contact your local Intel sales office or your distributor to obtain the latest specifications and before placing your product order. Copies of documents which have an order number and are referenced in this document, or other Intel literature, may be obtained by calling

1-800-548-4725, or by visiting Intel's Web site at www.intel.com.

Copyright © 2015 Intel Corporation. All rights reserved. Intel, the Intel logo, and Intel Xeon are trademarks of Intel Corporation in the U.S. and/or other countries.

*Other names and brands may be claimed as the property of others. Printed in USA 1015/DVA/PDF Please Recycle 331109-003US



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Intel:](#)

[XL710QDA2](#) [XL710QDA1](#)



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.