



Microsemi Corp.

The diode experts

SCOTTSDALE, AZ
For more information call:
(602) 941-6300

**1N6267 thru
1N6303A
and 1.5KE6.8 thru
1.5KE400A**

FEATURES

- ECONOMICAL
- 1500 WATTS PEAK PULSE POWER DISSIPATION
- STAND OFF VOLTAGES FROM 5.5V - 171V
- UNIPOLAR OR BIPOLAR
- AVAILABLE IN CHIP FORM FOR HYBRID APPLICATION
- MULTI-CHIP BIDIRECTIONAL CELLS AVAILABLE

DESCRIPTION

This defines a series of silicon Transient Suppressors designed to protect voltage sensitive components from high energy voltage transients. TAZ devices have become very important as a consequence of their high surge capability, extremely fast response time, and low incremental surge resistance (R_s).

To characterize TAZ, a minimum voltage at low current conditions (V_{BR}), and a maximum clamping voltage (V_C), at a maximum peak pulse current are specified. In addition, a maximum clamping ratio is indicated. The maximum leakage current at the rated stand-off voltage is also provided to assure low power consumption under normal conditions.

APPLICATION

This TAZ series has a peak pulse power rating of 1500 watts for one millisecond. It can protect integrated circuits, hybrids, CMOS, MOS, and other voltage sensitive components in a broad range of applications such as telecommunications, power supplies, computers, automotive, and industrial equipment.

MAXIMUM RATINGS

1500 Watts of Peak Pulse Power Dissipation at 25°C.

$t_{clamping}$ (0 Volts to $V_{(BR)}$ Min.):

Unidirectional $< 1 \times 10^{-12}$ Seconds; Bidirectional $< 5 \times 10^{-9}$ Seconds.

Operating and Storage Temperature -65°C to +175°C.

Forward Surge Rating 200 Amps, 1/20 Second at 25°C.

Steady State Power Dissipation 5.0 W @ $T_1 = 75^\circ\text{C}$.

(Not Applicable in Chip Form).

ELECTRICAL CHARACTERISTICS


Clamping Factor: 1.33 @ full rated power

1.20 @ 50% rated power

The Clamping Factor is defined as: The ratio of the actual V_C (Clamping Voltage) to the actual $V_{(BR)}$ (Breakdown Voltage) as measured on a specific device.

**TRANSIENT
ABSORPTION ZENER**

**UNIDIRECTIONAL
AND
BIDIRECTIONAL**

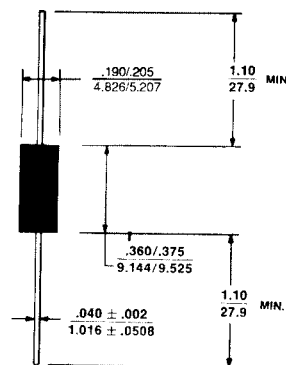

All dimensions in INCH
m. m.

MECHANICAL CHARACTERISTICS

CASE: Molded

WEIGHT: 1.5 Grams (Approx.)

POLARITY: Positive Terminal
Marked with Band

1N6267 thru 1N6303A and 1.5KE6.8 thru 1.5KE400A

ELECTRICAL CHARACTERISTICS @ 25°C

Industry Type Number	JEDEC Type Number	Rated Stand-off Voltage	Breakdown Voltage (BR)			I _T mA	Maximum Clamping Voltage (V _{CL})	Maximum Reverse Leakage I _R @ V _{WM}	Rated Maximum Peak Pulse Current	Maximum Temperature Coefficient α _V %/°C
		V _{WM} VOLTS	MIN	MAX	VC VOLTS		I _R @ V _{WM} μA	I _{PP} A	of V _{PK} %/°C	
—	1N5908	5.0	6.0	—	1	7.6	300	30	—	.057
1.5KE6.8	1N6267	5.50	6.12	7.48	10	10.8	1000	139.0	—	.057
1.5KE6.8A	1N6267A	5.80	6.45	7.14	10	10.3	1000	140.0	—	.057
1.5KE7.5	1N6268	6.05	6.75	8.25	10	11.7	500	128.0	—	.061
1.5KE7.5A	1N6268A	6.40	7.13	7.88	10	11.5	500	132.0	—	.061
1.5KE8.2	1N6269	6.63	7.38	9.02	10	12.5	200	120.0	—	.065
1.5KE8.2A	1N6269A	7.02	7.79	8.61	10	12.1	200	124.0	—	.065
1.5KE9.1	1N6270	7.37	8.19	10.00	1	13.8	50	109.0	—	.068
1.5KE9.1A	1N6270A	7.78	8.65	9.55	1	13.4	50	112.0	—	.068
1.5KE10	1N6271	8.10	9.00	11.00	1	15.0	10	100.0	—	.073
1.5KE10A	1N6271A	8.55	9.50	10.50	1	14.5	10	102.0	—	.073
1.5KE11	1N6272	8.92	9.90	12.10	1	16.2	5	93.0	—	.075
1.5KE11A	1N6272A	9.40	10.50	11.60	1	15.6	5	96.0	—	.075
1.5KE12	1N6273	9.72	10.80	13.20	1	17.3	5	87.0	—	.078
1.5KE12A	1N6273A	10.20	11.40	12.60	1	16.7	5	90.0	—	.078
1.5KE13	1N6274	10.50	11.70	14.30	1	19.0	5	79.0	—	.081
1.5KE13A	1N6274A	11.10	12.40	13.70	1	18.2	5	82.0	—	.081
1.5KE15	1N6275	12.10	13.50	16.50	1	22.0	5	71.0	—	.084
1.5KE15A	1N6275A	12.80	14.30	15.80	1	21.2	5	64.0	—	.086
1.5KE16	1N6276	12.90	14.40	17.60	1	23.5	5	67.0	—	.086
1.5KE16A	1N6276A	13.60	15.20	16.80	1	22.5	5	66.0	—	.086
1.5KE18	1N6277	14.50	16.20	19.80	1	26.5	5	56.5	—	.088
1.5KE18A	1N6277A	15.30	17.10	18.90	1	25.2	5	51.5	—	.088
1.5KE20	1N6278	16.20	18.00	22.00	1	31.5	5	54.0	—	.090
1.5KE20A	1N6278A	17.10	19.00	21.00	1	27.7	5	47.0	—	.090
1.5KE22	1N6279	17.80	19.80	24.20	1	31.9	5	49.2	—	.092
1.5KE22A	1N6279A	18.80	20.90	23.10	1	30.6	5	43.0	—	.094
1.5KE24	1N6280	19.40	21.60	26.40	1	34.7	5	45.0	—	.094
1.5KE24A	1N6280A	20.50	22.80	25.20	1	33.2	5	39.5	—	.096
1.5KE27	1N6281	21.80	24.30	29.70	1	39.1	5	38.5	—	.096
1.5KE27A	1N6281A	23.10	25.70	28.40	1	37.5	5	34.5	—	.097
1.5KE30	1N6282	24.30	27.00	33.00	1	43.5	5	36.0	—	.097
1.5KE30A	1N6282A	25.60	28.50	31.50	1	41.4	5	31.5	—	.098
1.5KE33	1N6283	26.80	29.70	36.30	1	47.7	5	29.5	—	.098
1.5KE33A	1N6283A	28.20	31.40	34.70	1	45.7	5	25.0	—	.099
1.5KE36	1N6284	30.80	34.20	37.80	1	52.0	5	23.0	—	.099
1.5KE36A	1N6284A	32.00	35.40	36.00	1	50.0	5	20.5	—	.100
1.5KE39	1N6285	31.60	35.10	41.00	1	56.4	5	26.5	—	.100
1.5KE39A	1N6285A	34.80	38.70	47.30	1	61.9	5	24.0	—	.101
1.5KE43	1N6286	34.80	38.70	47.30	1	61.9	5	24.0	—	.101
1.5KE43A	1N6286A	36.80	40.90	45.00	1	59.3	5	25.3	—	.101
1.5KE47	1N6287	38.10	42.30	51.70	1	67.8	5	22.2	—	.101
1.5KE47A	1N6287A	40.20	44.70	49.40	1	64.8	5	23.2	—	.101
1.5KE51	1N6288	41.30	45.90	56.10	1	73.5	5	20.4	—	.102
1.5KE51A	1N6288A	43.60	48.50	53.60	1	70.1	5	21.4	—	.102
1.5KE56	1N6289	45.80	50.40	61.40	1	80.5	5	18.6	—	.103
1.5KE56A	1N6289A	47.80	53.20	58.80	1	77.0	5	19.5	—	.103
1.5KE62	1N6290	50.20	55.80	68.20	1	89.0	5	16.9	—	.104
1.5KE62A	1N6290A	53.00	58.90	65.10	1	85.0	5	17.7	—	.104
1.5KE66	1N6291	55.10	61.20	74.80	1	98.0	5	15.3	—	.104
1.5KE66A	1N6291A	58.10	64.60	71.40	1	92.0	5	16.3	—	.104
1.5KE75	1N6292	60.70	67.50	82.50	1	108.0	5	13.9	—	.105
1.5KE75A	1N6292A	64.10	71.30	78.00	1	103.0	5	14.9	—	.105
1.5KE82	1N6293	66.40	73.80	90.20	1	118.0	5	12.7	—	.105
1.5KE82A	1N6293A	70.10	77.90	86.10	1	113.0	5	13.3	—	.105
1.5KE91	1N6294	73.70	81.90	100.00	1	131.0	5	11.4	—	.106
1.5KE91A	1N6294A	77.80	86.50	95.00	1	125.0	5	12.4	—	.106
1.5KE100	1N6295	81.00	90.00	110.00	1	144.0	5	10.4	—	.106
1.5KE100A	1N6295A	85.50	95.00	105.00	1	137.0	5	11.0	—	.106
1.5KE110	1N6296	89.20	99.00	121.00	1	158.0	5	9.5	—	.107
1.5KE110A	1N6296A	94.00	105.00	116.00	1	152.0	5	10.2	—	.107
1.5KE120	1N6297	97.20	108.00	132.00	1	173.0	5	8.7	—	.107
1.5KE120A	1N6297A	102.00	114.00	126.00	1	165.0	5	9.1	—	.107
1.5KE130	1N6298	105.00	117.00	143.00	1	187.0	5	8.0	—	.107
1.5KE130A	1N6298A	111.00	124.00	137.00	1	179.0	5	8.4	—	.107
1.5KE150	1N6299	121.00	135.00	165.00	1	215.0	5	7.0	—	.108
1.5KE150A	1N6299A	128.00	143.00	158.00	1	207.0	5	7.2	—	.108
1.5KE160	1N6300	131.00	144.00	176.00	1	230.0	5	6.5	—	.108
1.5KE160A	1N6300A	136.00	152.00	168.00	1	219.0	5	6.8	—	.108
1.5KE170	1N6301	138.00	153.00	187.00	1	244.0	5	6.2	—	.108
1.5KE170A	1N6301A	145.00	162.00	179.00	1	234.0	5	6.4	—	.108
1.5KE180	1N6302	146.00	162.00	198.00	1	258.0	5	5.8	—	.108
1.5KE180A	1N6302A	154.00	171.00	189.00	1	246.0	5	6.1	—	.108
1.5KE200	1N6303	162.00	180.00	220.00	1	285.0	5	5.2	—	.108
1.5KE200A	1N6303A	171.00	190.00	210.00	1	274.0	5	5.5	—	.108
1.5KE220	—	175.00	198.00	242.00	1	344.0	5	4.3	0.110	—
1.5KE220A	—	185.00	209.00	231.00	1	328.0	5	4.6	0.110	—
1.5KE250	—	202.00	225.00	275.00	1	360.0	5	5.0	0.110	—
1.5KE250A	—	214.00	237.00	263.00	1	344.0	5	5.0	0.110	—
1.5KE300	—	243.00	270.00	330.00	1	430.0	5	5.0	0.111	—
1.5KE300A	—	256.00	285.00	315.00	1	414.0	5	5.0	0.111	—
1.5KE350	—	284.00	315.00	385.00	1	504.0	5	4.0	0.111	—
1.5KE350A	—	300.00	332.00	368.00	1	482.0	5	4.0	0.111	—
1.5KE400	—	324.00	360.00	440.00	1	574.0	5	4.0	0.111	—
1.5KE400A	—	342.00	380.00	420.00	1	548.0	5	4.0	0.111	—

V_I at 100 amps peak, 8.3 ms sine wave equals 3.5 volts max. (unidirectional only). For Bidirectional part number add C or CA as suffix (e.g., 1.5KE33C or 1.5KE33CA). For Bidirectional types having V_{WM} of 8 volts and under, the I_D leakage current is doubled. 1N62XX or 1N5908 not available as bidirectional. For bipolar capacitance will be .5 that shown in Fig. 2 for zero bias.

SYMBOLS AND ABBREVIATIONS

V _{WM} = Rated Stand-off Voltage	V _(BR) = Breakdown Voltage
I _{PP} = Peak Pulse Current	t _T = Test Current
P _{PP} = Peak Pulse Power	I _D = Reverse Leakage
V _{C(MAX)} = Maximum Clamping Voltage	

NOTE 1: Normal selection criteria for TAZ devices is by rated stand-off voltage (V_{WM}) and should be equal or greater than DC or continuous peak operating voltage.
NOTE 2: TAZ devices are tested to maximum peak pulse current (I_{PP}) with clamping voltage monitored. This surge capability is one of the most significant electrical characteristics of the device and should be considered as part of customer quality inspections.


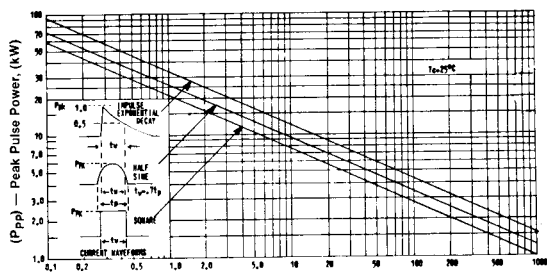


FIGURE 1
PEAK PULSE POWER VS. PULSE TIME (T_w) IN μs

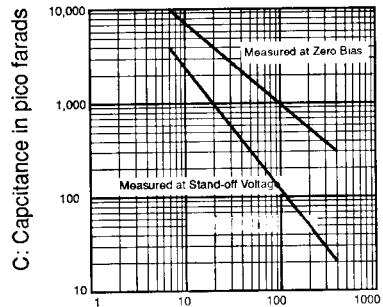

BV: Breakdown Voltage in Volts

FIGURE 2
TYPICAL CAPACITANCE VS. BREAKDOWN VOLTAGE

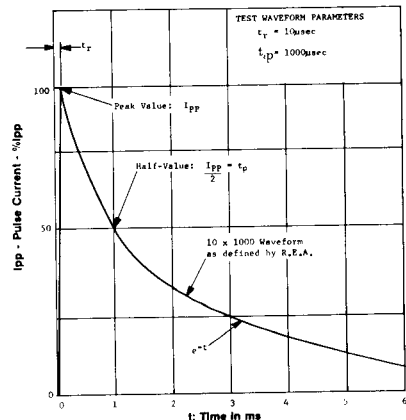


FIGURE 3 PULSE WAVE FORM




FIGURE 4 DERATING CURVE



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.