

LTM4613

8A, High Voltage Power μModule Regulator

DESCRIPTION

Demonstration circuit DC1743A features the LTM®4613EV, an EN55022 class B certified, high input and output voltage, high efficiency, switch mode step-down power µModule® regulator. The input voltage range is from 5V to 36V. The output voltage is jumper programmable from 3.3V to 12V with a rated load current of 8A. Derating is necessary for certain V_{IN} , V_{OUT} , frequency and thermal conditions: please refer to LTM4613 data sheet for derating curves. Only input and output capacitors are needed externally. The DC1743A offers the TRACK/SS pin allowing the user to program output tracking or soft-start period. Output

voltage margining can also be realized through jumper position selections.

Higher efficiency at low load currents is achieved by setting the MODE pin jumper to DCM. The PLL pin is available to synchronize the LTM4613EV to an external clock. The LTM4613 data sheet must be read in conjunction with this demo manual prior to working on or modifying demo circuit DC1743A.


**Design files for this circuit board are available at
<http://www.linear.com/demo>**

LT, LT, LTC, LTM, µModule, Linear Technology and the Linear logo are registered trademarks of Linear Technology Corporation. All other trademarks are the property of their respective owners.

PERFORMANCE SUMMARY ($T_A = 25^\circ\text{C}$)

PARAMETER	CONDITIONS	VALUE
Input Voltage Range		5V to 36V
Output Voltage V_{OUT}	Jumper Selectable	3.3V, 5V, 12V; $\pm 2\%$
Maximum Continuous Output Current	Derating Is Necessary for Certain Operating Conditions. See Data Sheet for Details.	8A _{DC}
Default Operating Frequency	$V_{OUT} = 12V$ $V_{OUT} = 5V$ $V_{OUT} = 3.3V$	600kHz 250Khz 165kHz
Efficiency	$V_{IN} = 12V$, $V_{OUT} = 5V$, $I_{OUT} = 8A$	93.0% See Figure 3
Load Transient	$V_{IN} = 12V$, $V_{OUT} = 5V$	See Figure 4

BOARD PHOTO

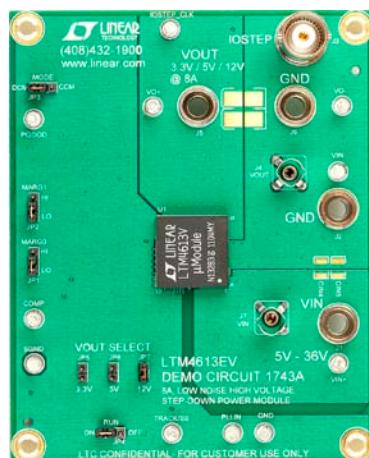

DEMO MANUAL DC1743A

QUICK START PROCEDURE

Demonstration circuit DC1743A is an easy way to evaluate the performance of the LTM4613EV. Please refer to Figure 1 for proper measurement equipment setup and follow the procedure below:

1. Place jumpers in the following positions for a typical 3.3V_{OUT} application:

MODE	MARG1	MARG0	V _{OUT} SELECT	RUN
CCM	L0	L0	3.3V	ON
2. With power off, connect the input power supply, load and meters as shown in Figure 1. Preset the load to 0A and V_{IN} supply to be 0V.
3. Turn on the power at the input. Increase V_{IN} to 12V (do not hot-plug the input supply or apply more than the rated maximum voltage of 36V to the board or the part may be damaged). The output voltage should be regulated and deliver the selected output voltage $\pm 2\%$.

4. Vary the input voltage from 5V to 36V and adjust the load current from 0A to 8A. Observe the output voltage regulation, ripple voltage, efficiency, and other parameters.
5. To measure input or output ripple, insert the scope probe to J7 or J4.
6. For optional load transient test, apply an adjustable pulse signal between IOSTEP_CLK and GND test points. The pulse amplitude sets the load step current amplitude. The pulse duty cycle should be low (< 5%) to limit the thermal stress on the load transient circuit. The load step current can be monitored with a BNC connected to J3 (20mV/A). The output voltage can be monitored at the probe jack J4.

DEMO MANUAL DC1743A

QUICK START PROCEDURE

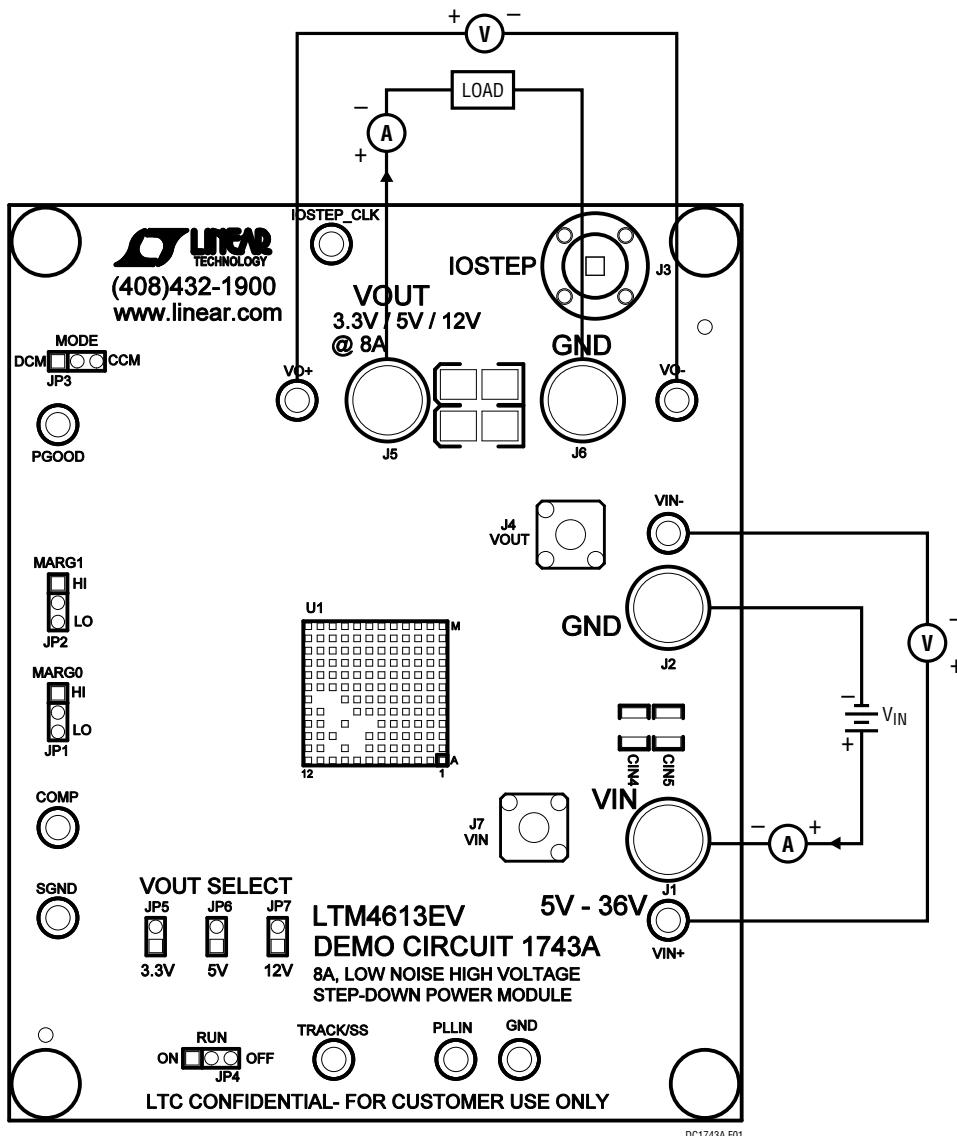


Figure 1. Proper Measurement Equipment Setup

DEMO MANUAL DC1743A

QUICK START PROCEDURE

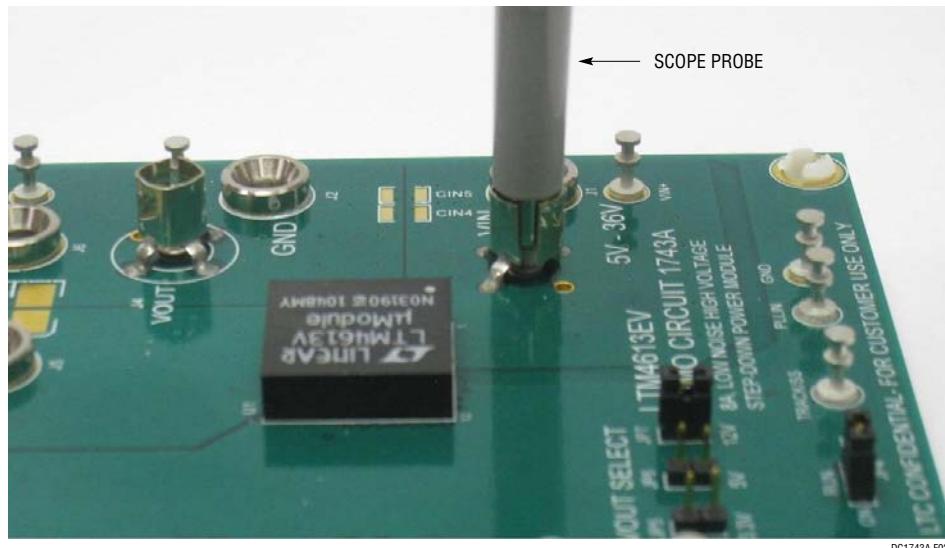


Figure 2. Measuring V_{IN} or V_{OUT} Ripple



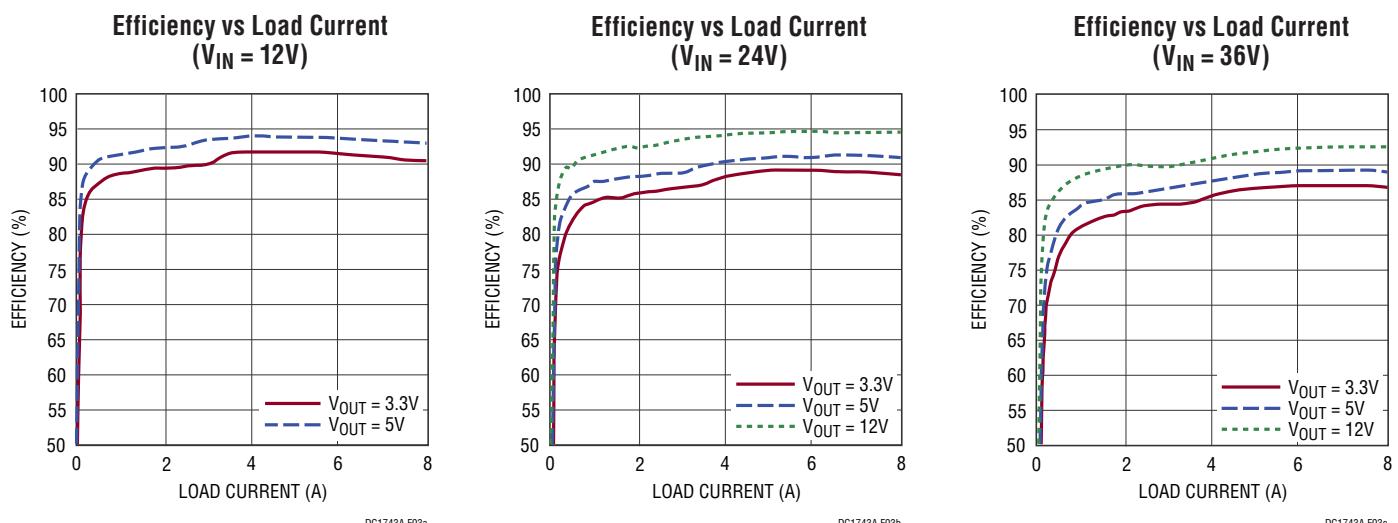


Figure 3. Measured DC1743A Efficiency at Different V_{IN} and V_{OUT} (DCM Mode Enabled)

QUICK START PROCEDURE

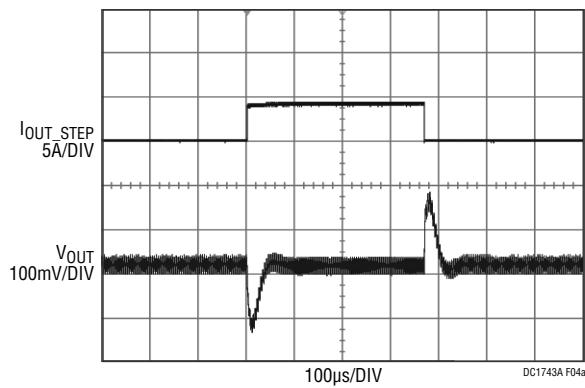


V_{IN} = 12V, V_{OUT} = 5V
0A TO 4A LOAD STEP
C_{OUT} = 1x47μF/16V/POSCAP+3x47μF/16V/X5R+1x10μF/16V/X5R

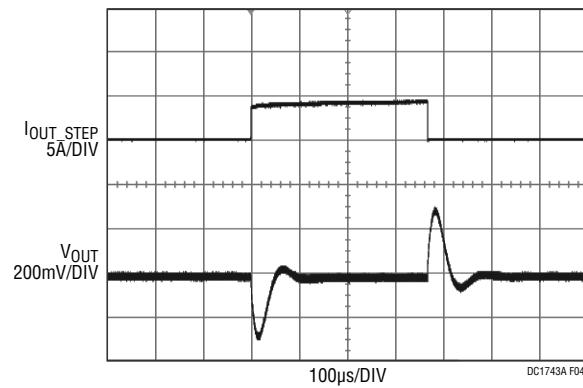

V_{IN} = 24V, V_{OUT} = 12V
0A TO 4A LOAD STEP
C_{OUT} = 1x47μF/16V/POSCAP+3x47μF/16V/X5R+1x10μF/16V/X5R

Figure 4. Measured Load Transient Responses

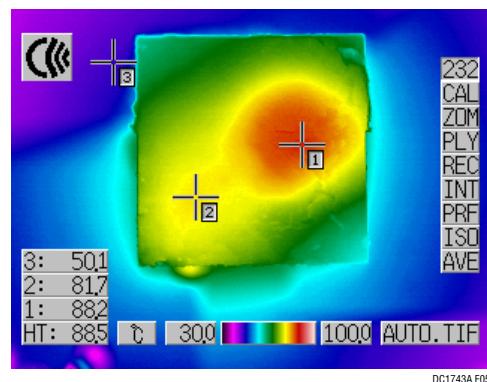

V_{IN} = 24V
V_{OUT} = 12V
I_{LOAD} = 8A
AMBIENT TEMPERATURE = 23.3°C
NO FORCED AIR FLOW

Figure 5. Thermal Image of LTM4613


DEMO MANUAL DC1743A

PARTS LIST

ITEM	QTY	REFERENCE	PART DESCRIPTION	MANUFACTURER/PART NUMBER
Required Circuit Components				
1	1	CFF	CAP, NPO 47pF 50V 10% 0603	AVX 06035A470KAT1A
2	1	CIN1	CAP, ALUM 100µF 50V 10%	SUNCON 50CE100FS
3	5	CIN2, CIN3, C8, C9, C10	CAP, X5R 10µF 50V 20% 1210	TAIYO YUDEN UMK325BJ106MM-T
4	3	COUT1, COUT2, COUT6	CAP, X5R 47µF 16V 20% 1210	TAIYO YUDEN EMK325BJ476MM
5	1	COUT4	CAP, X5R 10µF 16V 20% 1210	TDK C3225X5R1C106M
6	1	COUT5	CAP, X7R 1µF 16V 10% 0603	TDK C1608X7R1C105K
7	1	COUT7	CAP, POSCAP 47µF 16V 20% 7343	SANYO 16TQC47M
8	1	CSS	CAP, X7R 0.1µF 16V 20% 0603	AVX 0603YC104MAT2A
9	1	R14	RES, CHIP 22.1k 0.06W 1% 0603	VISHAY CRCW060322K1FKEA
10	1	R16	RES, CHIP 13.7k 0.06W 1% 0603	VISHAY CRCW060313K7FKEA
11	1	R17	RES, CHIP 5.23k 0.06W 1% 0603	YAYEO, RC0603FR-075K23L
12	2	R2, R12	RES, CHIP 51k 0.06W 5% 0603	VISHAY CRCW060351K0JNEA
13	1	R15	RES, CHIP 10k 0.06W 5% 0603	VISHAY CRCW060310K0JNEA
14	1	R4	RES, CHIP 392k 0.06W 1% 0603	VISHAY CRCW0603392KFKEA
15	1	D1	ZENER DIODE, 5.1V SOT23	ON SEMICONDUCTOR MMBZ5231B
16	1	U1	I.C., VOLTAGE REG	LINEAR TECHNOLOGY CORPORATION LTM4613EV
Additional Demo Board Circuit Components				
1	1	Q1	MOSFET, N-CHANNEL 30V	VISHAY SILICONIX SUD50N03-09
2	1	C1	CAP, X7R 1µF 16V 10% 0603	TDK C1608X7R1C105K
3	0	COUT3, CIN4, CIN5 (OPT)	CAP, 1210	
4	0	CIN6 (OPT)	CAP, 0805	
5	0	C2, C3, C6, C7, CP (OPT)	CAP, 0603	
6	1	R1	RES, CHIP 10k 0.06W 5% 0603	VISHAY CRCW060310K0JNEA
7	1	R3	RES, LRC 0.020 1W 5% 2512	IRC LRF2512-01-R020-J
8	2	R5, R9	RES, CHIP 0Ω 1/16W 1A 0603	VISHAY CRCW0603000Z
9	0	R6, R7, R8, R10, R11, R13 (OPT)	RES, 0603	
Hardware				
1	4	JP1, JP2, JP3, JP4	HEADERS, 3 PINS 2mm CTRS	SAMTEC TMM-103-02-L-S
2	3	JP5, JP6, JP7	JUMPER, 2 PINS 2mm CTRS	SAMTEC TMM-102-02-L-S
3	4	J1, J2, J5, J6	CONNECTOR, BANANA JACK	KEYSTONE 575-4
4	1	J3	BNC CONNECTOR	CONNEX 112404
5	2	J4, J7	TEST PROBE, CONNECTOR	TEKTRONIC 131-4353-00
6	11	E1 TO E4, E6 TO E12	TURRET, TESTPOINT	MILL MAX 2501-2-00-80-00-00-07-0

dc1743af

SCHEMATIC DIAGRAM

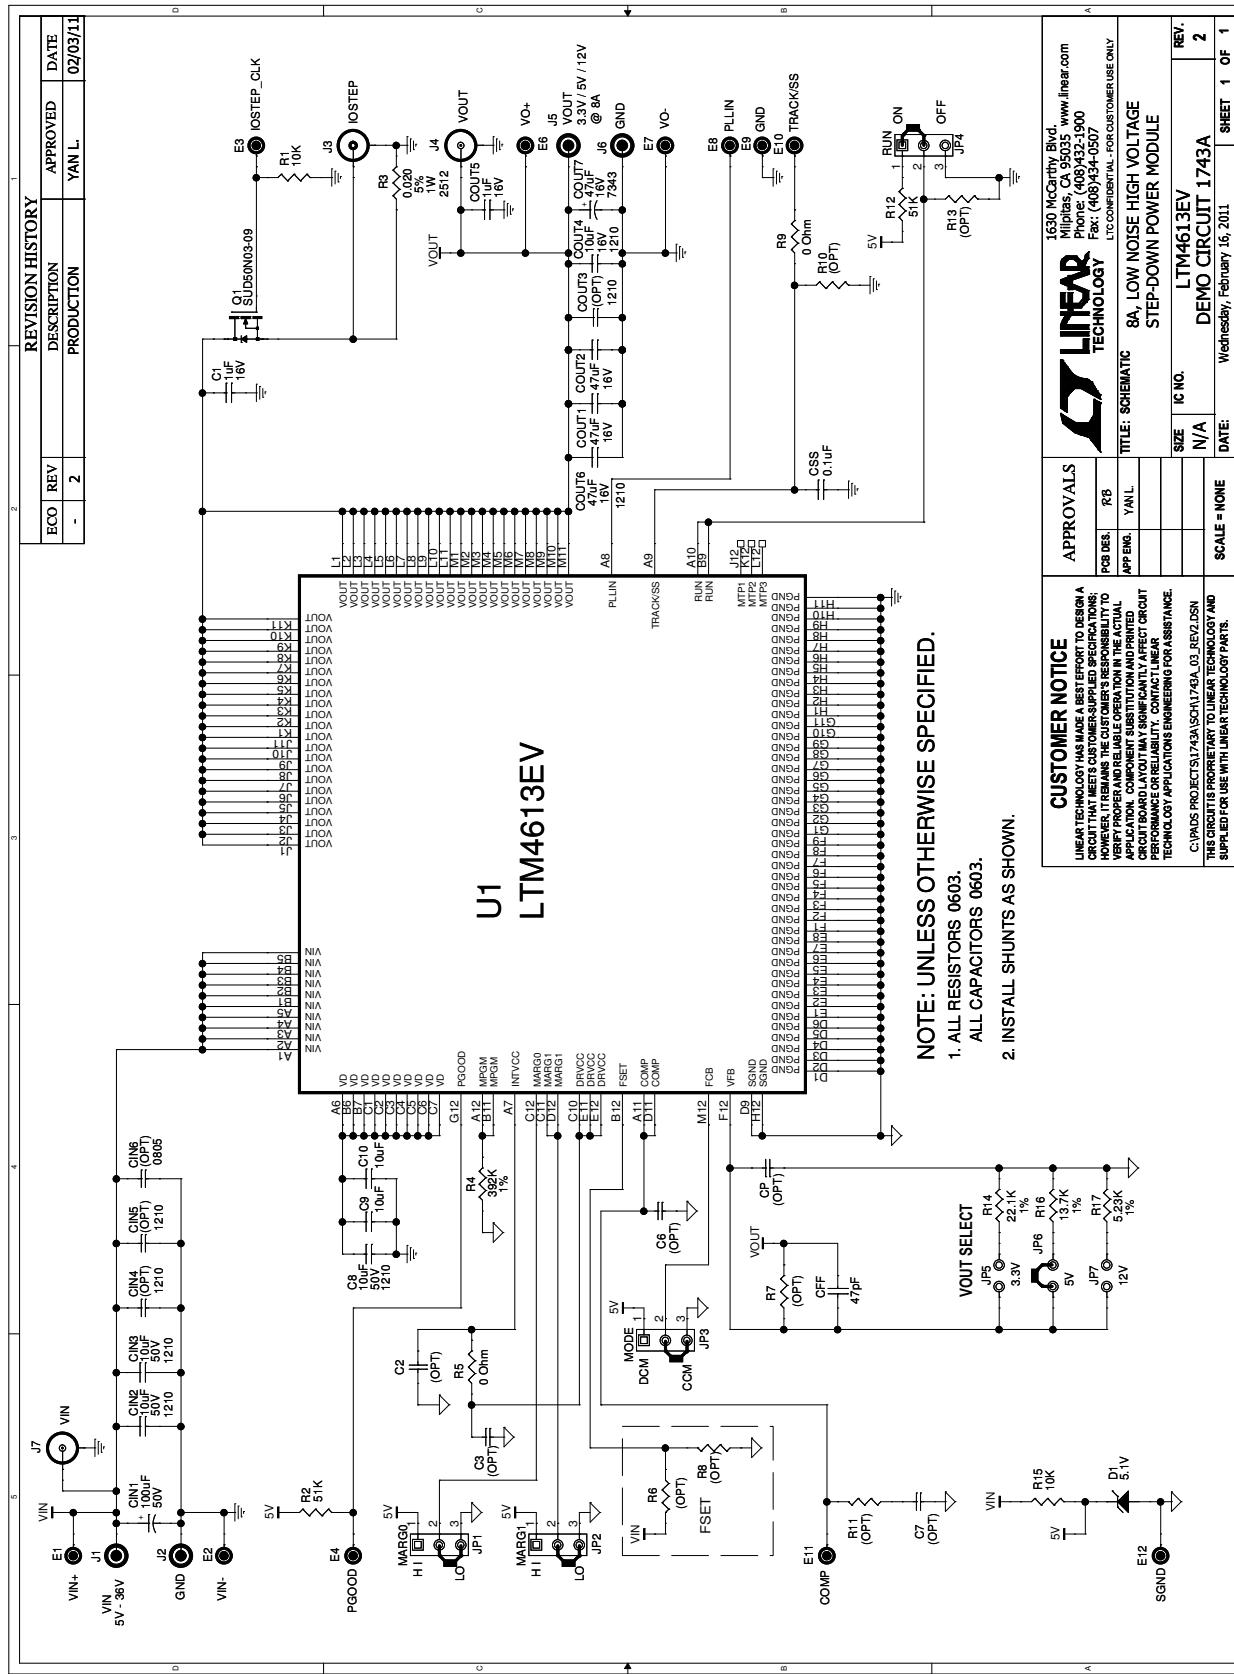

CUSTOMER NOTICE	
LINEAR TECHNOLOGY HAS MADE A BEST EFFORT TO DESIGN A CIRCUIT THAT MEETS CUSTOMER-SPECIFIED SPECIFICATIONS. HOWEVER, IT IS THE CUSTOMER'S RESPONSIBILITY TO VERIFY AND TEST THE CIRCUIT IN THE ACTUAL APPLICATION. EQUIPMENT SUBSTITUTION AND PRINTED CIRCUIT BOARD LAYOUT MAY SIGNIFICANTLY AFFECT CIRCUIT PERFORMANCE OR RELIABILITY. CONTACT LINEAR TECHNOLOGY APPLICATION ENGINEERING FOR ASSISTANCE.	
PCB DES.	R8
APP ENG.	YAN L.
DATE:	Wednesday, February 16, 2011

1630 McCarthy Blvd.
Milpitas, CA 95035 • www.linear.com
Phone: (408) 535-3900
Fax: (408) 534-0500
©2009 Linear Technology Corporation. All rights reserved.
LCI CONFIDENTIAL—FOR CUSTOMER USE ONLY

APPROVALS	IC NO.	REV.
	N/A	2
	LTM4613EV	
	DEMO CIRCUIT 1743A	
	SHEET 1 OF 1	

DEMO MANUAL DC1743A

DEMONSTRATION BOARD IMPORTANT NOTICE

Linear Technology Corporation (LTC) provides the enclosed product(s) under the following **AS IS** conditions:

This demonstration board (DEMO BOARD) kit being sold or provided by Linear Technology is intended for use for **ENGINEERING DEVELOPMENT OR EVALUATION PURPOSES ONLY** and is not provided by LTC for commercial use. As such, the DEMO BOARD herein may not be complete in terms of required design-, marketing-, and/or manufacturing-related protective considerations, including but not limited to product safety measures typically found in finished commercial goods. As a prototype, this product does not fall within the scope of the European Union directive on electromagnetic compatibility and therefore may or may not meet the technical requirements of the directive, or other regulations.

If this evaluation kit does not meet the specifications recited in the DEMO BOARD manual the kit may be returned within 30 days from the date of delivery for a full refund. THE FOREGOING WARRANTY IS THE EXCLUSIVE WARRANTY MADE BY THE SELLER TO BUYER AND IS IN LIEU OF ALL OTHER WARRANTIES, EXPRESSED, IMPLIED, OR STATUTORY, INCLUDING ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR ANY PARTICULAR PURPOSE. EXCEPT TO THE EXTENT OF THIS INDEMNITY, NEITHER PARTY SHALL BE LIABLE TO THE OTHER FOR ANY INDIRECT, SPECIAL, INCIDENTAL, OR CONSEQUENTIAL DAMAGES.

The user assumes all responsibility and liability for proper and safe handling of the goods. Further, the user releases LTC from all claims arising from the handling or use of the goods. Due to the open construction of the product, it is the user's responsibility to take any and all appropriate precautions with regard to electrostatic discharge. Also be aware that the products herein may not be regulatory compliant or agency certified (FCC, UL, CE, etc.).

No license is granted under any patent right or other intellectual property whatsoever. **LTC assumes no liability for applications assistance, customer product design, software performance, or infringement of patents or any other intellectual property rights of any kind.**

LTC currently services a variety of customers for products around the world, and therefore this transaction **is not exclusive**.

Please read the DEMO BOARD manual prior to handling the product. Persons handling this product must have electronics training and observe good laboratory practice standards. **Common sense is encouraged.**

This notice contains important safety information about temperatures and voltages. For further safety concerns, please contact a LTC application engineer.

Mailing Address:

Linear Technology
1630 McCarthy Blvd.
Milpitas, CA 95035

Copyright © 2004, Linear Technology Corporation

dc1743af



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помошь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помошь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.