


FEATURES

- * High speed transmission (16 Mbps , NRZ code)
- * TTL compatible
- * Same package as fiber optic transmitting module LTDL-TX12S01B


APPLICATIONS

- * Digital audio system
- * CD, MD & DVD players

PACKAGE DIMENSIONS

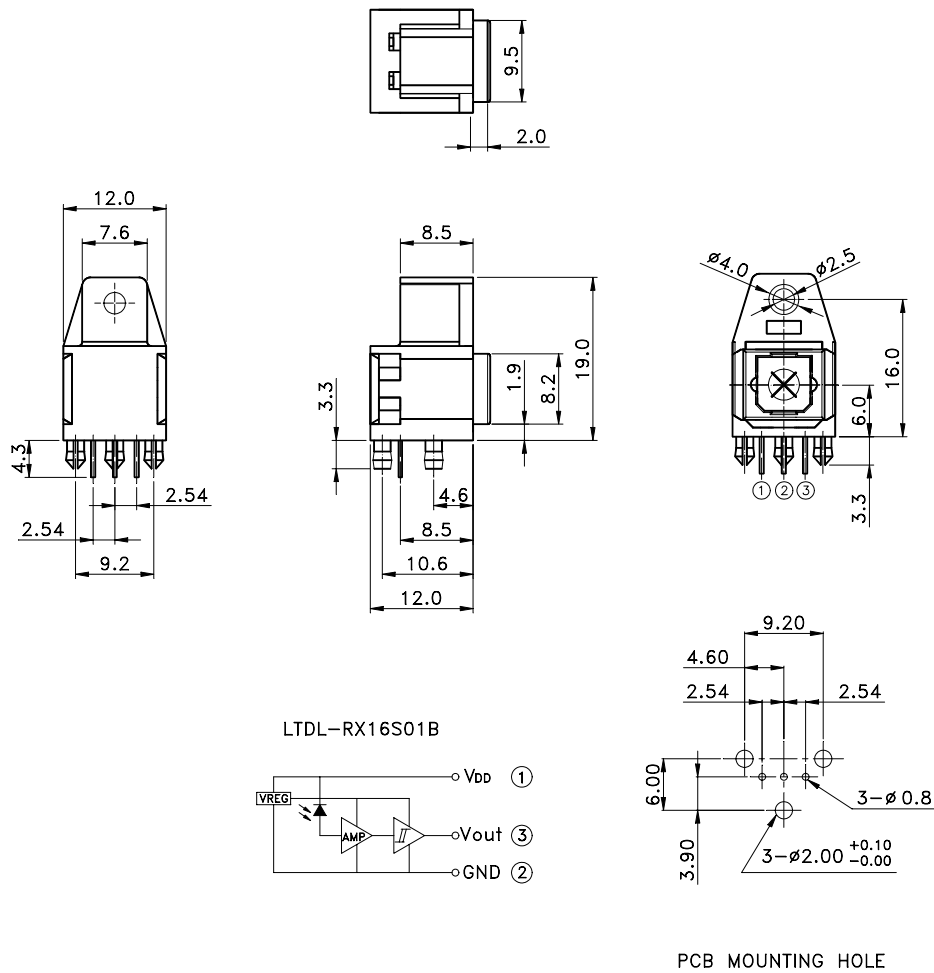

LTDL-RX16S01B



PCB MOUNTING HOLE

NOTES:

1. All dimensions are in millimeters (inches).
2. Tolerance is ± 0.3 mm (.012") unless otherwise noted.
3. In the absence of confirmation by device data sheets, LITE-ON takes no responsibility for any defects that may occur in equipment using any devices shown in catalogs, data book, etc. Contact LITE-ON in order to obtain the latest device data sheets before using any LITE-ON device.


ELECTRO—OPTICAL CHARACTERISTICS

ABSOLUTE MAXIMUM RATINGS AT Ta=25°C

PARAMETER	MAXIMUM RATING	UNIT
Supply Voltage (V _{DD})	-0.5 ~ +6.0	V
Output Voltage (V _O)	-0.5 ~ V _{DD} +0.3	V
Operating Temperature Range	-20°C to + 70°C	
Storage Temperature Range	-30°C to + 80°C	
Lead Soldering Temperature [1.6mm(.063") From Body]	260°C for 5 Seconds	

ELECTRICAL OPTICAL CHARACTERISTICS AT Ta=25°C

PARAMETER	SYMBOL	MIN.	TYP.	MAX.	UNIT	TEST CONDITION
Data Rate	T _s	0.1	—	16	Mbps	NRZ signal
Operating Voltage	V _{DD}	4.75	—	5.25	V	
Peak Sensitivity Wavelength	λ_{Peak}	—	650	—	nm	
Input Sensitivity	P _i	-24	—	-14	dBm	
Dissipation current	I _{DD}	—	4	6	mA	*1
High level output voltage	V _{OH}	2.4	4.8	—	V	*1
Low level output voltage	V _{OL}	—	0.2	0.4	V	*1
“Low→High”propagation delay time	t _{PLH}	—	—	166	ns	*1
“High→Low”propagation delay time	t _{PHL}	—	—	155	ns	
Pulse width distortion	Δt_w	-18	—	+18	ns	
Jitter	Δt_j	—	1	5	ns	*1
Rise Time	t _r	—	8	20	ns	*1
Fall Time	t _f	—	8	20	ns	*1

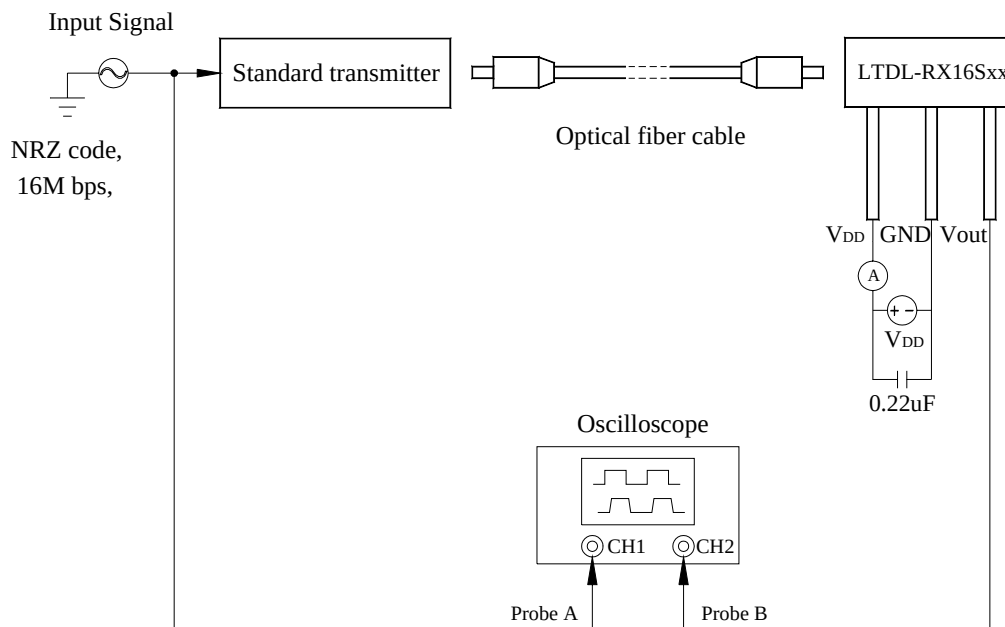
***1 Setup of Measuring System**


Note :

- (1) $V_{DD} = +5.0\text{ V} \pm 0.05\text{ V}$
- (2) Input signal : 16M bps, NRZ code, $t_r, t_f \leq 5\text{ ns}$
- (3) Characteristics of standard transmitter are according to another sheet.
- (4) The SONY POC-10 (POF, 1m) or its equivalent fiber optic cable should be used.
- (5) The Tektronix TDS380P or its equivalent oscilloscope should be used.
- (6) The probe B for the oscilloscope must be more than $1\text{ M}\Omega$ and less than 10 pF .
- (7) When measuring delay time, use same type and length of probe A and B.
- (8) It measures in the condition where did fiber optic cable straight, but the curve of the range within contented.


Item	Measuring Method
I_{DD}	Measured on the ammeter
V_{OH}	Measured on the oscilloscope
V_{OL}	Measured on the oscilloscope
t_{PLH}	Measured on the oscilloscope
t_{PHL}	Measured on the oscilloscope
Δt_w	Measured on the oscilloscope
t_r	Measured on the oscilloscope
t_f	Measured on the oscilloscope
Δt_j	Measured on the oscilloscope

Rise and Fall Times and Pulse Width Distortion

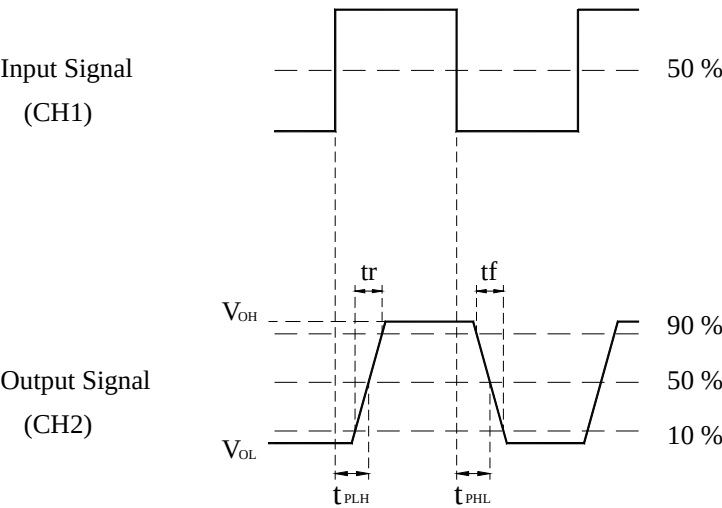

$Pulse\ Width\ Distortion = \Delta tw = t_{PHL} - t_{PLH}$

Jitter

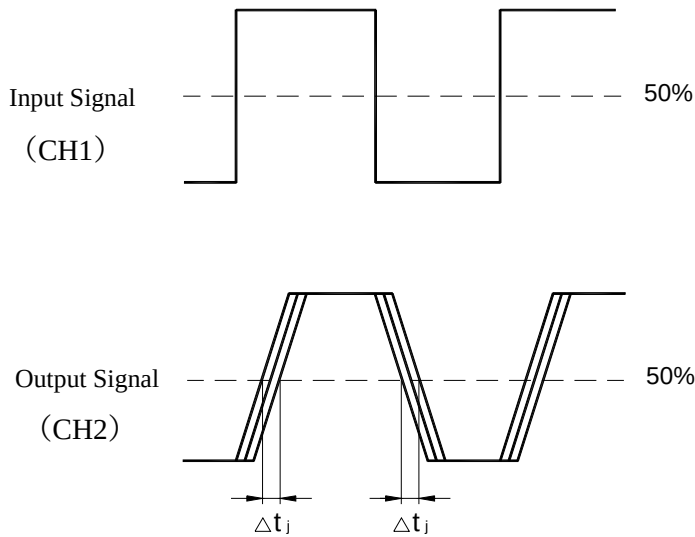



Notice

- The circuit application examples in this publication are provided to explain representative applications of LITE-ON devices and are not intended to guarantee any circuit design or license any intellectual property rights. LITE-ON takes no responsibility for any problems related to any intellectual property right of a third party resulting from the use of LITE-ON devices.
- Contact LITE-ON in order to obtain the latest device data sheets before using any LITE-ON device. LITE-ON reserves the right to make changes in the specifications, characteristics, data, materials, structure, and other contents described herein at any time without notice in order to improve design or reliability. Manufacturing locations are also subject to change without notice.
- Observe the following points when using any devices in this publication. LITE-ON takes no responsibility for damage caused by improper use of the devices which does not meet the conditions and absolute maximum ratings to be used specified in the relevant data sheet nor meet the following conditions :
 - (i) The devices in this publication are designed for use in general electronic equipment designs such as :
 - Personal computers
 - Office automation equipment
 - Telecommunication equipment 【terminal】
 - Test and measurement equipment
 - Industrial control
 - Audio visual equipment
 - Consumer electronics
 - (ii) Measure such as fail-safe function and redundant design should be taken to ensure reliability and safety when LITE-ON device are used for or in connection with equipment that requires higher reliability such as :
 - Transportation control and safety equipment (i.e., aircraft, train, automobiles, ect.)
 - Traffic signals
 - Gas leakage sensor breakers
 - Alarm equipment
 - Various safety devices, etc.
 - (iii) LITE-ON devices shall not be used for or in connection with equipment that requires an extremely high level of reliability and safety such as :
 - Space applications
 - Telecommunication equipment (trunk lines)
 - Nuclear power control equipment
 - Medical and other life support equipment (e.g., scuba)
- If the LITE-ON devices listed in this publication fall within the scope of strategic products described in the Foreign Exchange and Foreign Trade Law of Republic of China , it is necessary to obtain approval to export such LITE-ON devices.
- This publication is the proprietary product of LITE-ON and is copyrighted, with all rights reserved. Under the copyright laws, no part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, for any purpose, in whole or in part, without the express written permission of LITE-ON. Express written permission is also required before any use of this publication may be made by a third party.
- Contact and consult with a LITE-ON representative if there are any questions about the contents of this publication.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.