



RS-232/422/485 SWITCH
SELECTABLE EXPANSION
FOR ASYNCHRONOUS
CONNECTIVITY



PORTSERVER® TS MEI

Universal, high-performance RS-232/422/485 serial to Ethernet connectivity

PortServer TS MEI provides switch-selectable RS-232/422/485 serial port connectivity, making it easy to connect multiple serial devices to your network. It combines the inherent benefits of data networking with proven asynchronous connectivity to deliver powerful yet simple Ethernet connections for all of your serial devices.

Digi's patented RealPort®, with encryption and user authentication*, makes it possible to establish a connection between the host and networked serial device by creating a local COM or TTY port on the host computer, allowing software applications to work with networked device servers instead of requiring a host adapter.

Powerful features including data security via SSHv2, port buffering and full SNMP management, making PortServer TS MEI ideal for applications like console management where device management and monitoring are critical.

*The RealPort encryption feature is compatible with AIX, HP-UX, Solaris, Linux, Windows 2000, Windows XP, Windows 7, Windows 8, Windows 8.1, Windows 10, Windows Server 2003, Windows Server 2008 and Windows Server 2012. The RealPort authentication feature is compatible only with Windows 2000, Windows XP, Windows 7, Windows 8, Windows 8.1, Windows 10, Windows Server 2003, Windows Server 2008 and Windows Server 2012.

BENEFITS

- 1, 2 or 4 switch-selectable RS-232/422/485 serial ports to connect virtually any type of serial device over Ethernet
- Ideal for applications requiring COM ports, serial tunneling, TCP/UDP sockets, or multiple unicast functionality
- Patented RealPort for COM/TTY port control and management
- Modem emulation
- Monitoring and diagnostic utility
- Secure communication via SSHv2
- Tunable for low latency or optimized for throughput
- Easy web-based configuration (HTTP/HTTPS)

RELATED PRODUCTS



PortServer®
TS




PortServer®
TS MEI
Hardened



PortServer®
TS M MEI




ConnectPort®
TS




Cables and
Accessories

APPLICATION EXAMPLE

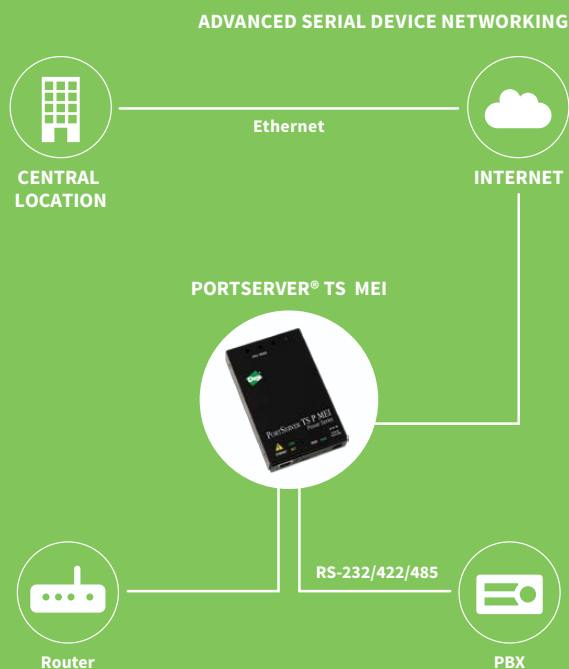


SPECIFICATIONS	PortServer® TS 1 MEI PortServer® TS 2 MEI PortServer® TS 4 MEI		
FEATURES			
MANAGEMENT	HTTP/HTTPS, CLI, SNMP (read/write), Digi Port Authority - Remote management diagnostics and auto-discovery tool		
PROTOCOLS	UDP/TCP, DHCP/RARP/ARP-Ping for IP Address assignment, Extended Telnet RFC 2217, Telnet, PPP, Reverse Telnet, Modbus to Modbus/TCP protocol conversion support, Reverse SSH		
SOFTWARE	Supports Digi's Realport® COM port redirector		
STATUS LEDS	Link, Activity, Power, Status		
DIMENSIONS (L X W X D)	5.25 in x 3.33 in x 0.95 in (13.34 cm x 8.46 cm x 2.42 cm)		
WEIGHT	2.25 oz (64.00 g)		
SECURITY	SSHv2, SSL/TLS		
OPERATING SYSTEMS	AIX, HP-UX, Solaris, Linux®, Windows® 2000, Windows® XP, Windows® 7, Windows® 8, Windows® 8.1, Windows® 10, Windows Server® 2003, Windows Server® 2008, Windows Server® 2012. Note: TCP/UDP socket services are operating system independent		
OTHER	Full modem and hardware flow control, Modem emulation, Port buffering, RJ45-DB-9F console adapter included for optional serial configuration		
INTERFACES			
SERIAL			
PORTS	1 RS-232/422/485 RJ-45 (switch select-able); Up to 230 Kbps throughput; Signal support for TXD, RXD, RTS, CTS, DTR, DSR, DCD	2 RS-232/422/485 RJ-45 (switch select-able); Up to 230 Kbps throughput; Signal support for TXD, RXD, RTS, CTS, DTR, DSR, DCD	4 RS-232/422/485 RJ-45 (switch select-able); Up to 230 Kbps throughput; Signal support for TXD, RXD, RTS, CTS, DTR, DSR, DCD
ETHERNET			
PORTS	1 RJ-45 10/100 Mbps 10/100Base-T (auto-sensing); Full or half duplex		
POWER REQUIREMENTS			
POWER INPUT	9-30 VDC with locking barrel power connector		
POWER SUPPLY (INCLUDED)	North America: 12 VDC/.5A max out; 120 VAC in (wall mount); International: 12 VDC/.5A max out; 100-240 VAC in (small brick)		
POWER SUPPLY	12 VDC extended temperature power supply sold separately		
POWER CONSUMPTION	Typical: 4 W; Max: 6 W		
PRODUCT SURGE PROTECTION (ESD)	4 kV burst (EFT) per EN61000-4-4, 2 kV surge transient per EN61000-4-5		
ENVIRONMENTAL			
OPERATING TEMPERATURE	0° C to +60° C (32° F to 140° F)		
STORAGE TEMPERATURE	-40° C to +85° C (-40° F to +185° F)		
RELATIVE HUMIDITY	5% to 95% (non-condensing)		
ETHERNET ISOLATION	1500 VAC min per IEEE802.3/ANSI X3.263		
SERIAL PORT PROTECTION (ESD)	15 kV human body model		
REGULATORY APPROVALS			
SAFETY	UL/CUL 60950, IEC 60950 & CB		
EMISSIONS/IMMUNITY	CE, FCC Part 15 (Class A), EN55024, EN55022 Class A, AS/NZS 3548, CISPR 22, VCCI V-3/99.05		

PORTSERVER TS MEI FAMILY - FRONT

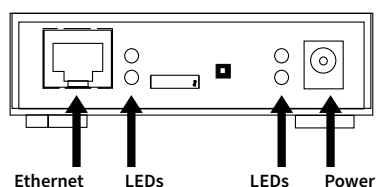

PORTSERVER TS MEI FAMILY - BACK

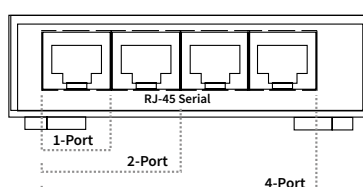

PART NUMBERS	DESCRIPTION
70001805	PortServer TS 1 MEI
70001806	PortServer TS 2 MEI
70001807	PortServer TS 4 MEI
70001832	PortServer TS 1 MEI (International)
70001833	PortServer TS 2 MEI (International)
70001834	PortServer TS 4 MEI (International)

FOR MORE INFORMATION
PLEASE VISIT WWW.DIGI.COM

DIGI SERVICE AND SUPPORT / You can purchase with confidence knowing that Digi is always available to serve you with expert technical support and our industry leading warranty. For detailed information visit www.digi.com/support.

© 1996-2015 Digi International Inc. All rights reserved.
All trademarks are the property of their respective owners.

91001182
G1/915

DIGI INTERNATIONAL WORLDWIDE HQ
877-912-3444 / 952-912-3444 / www.digi.com

DIGI INTERNATIONAL FRANCE
+33-1-55-61-98-98 / www.digi.fr

DIGI INTERNATIONAL JAPAN
+81-3-5428-0261 / www.digi-intl.co.jp

DIGI INTERNATIONAL SINGAPORE
+65-6213-5380

DIGI INTERNATIONAL CHINA
+86-21-50492199 / www.digi.com.cn





Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.