

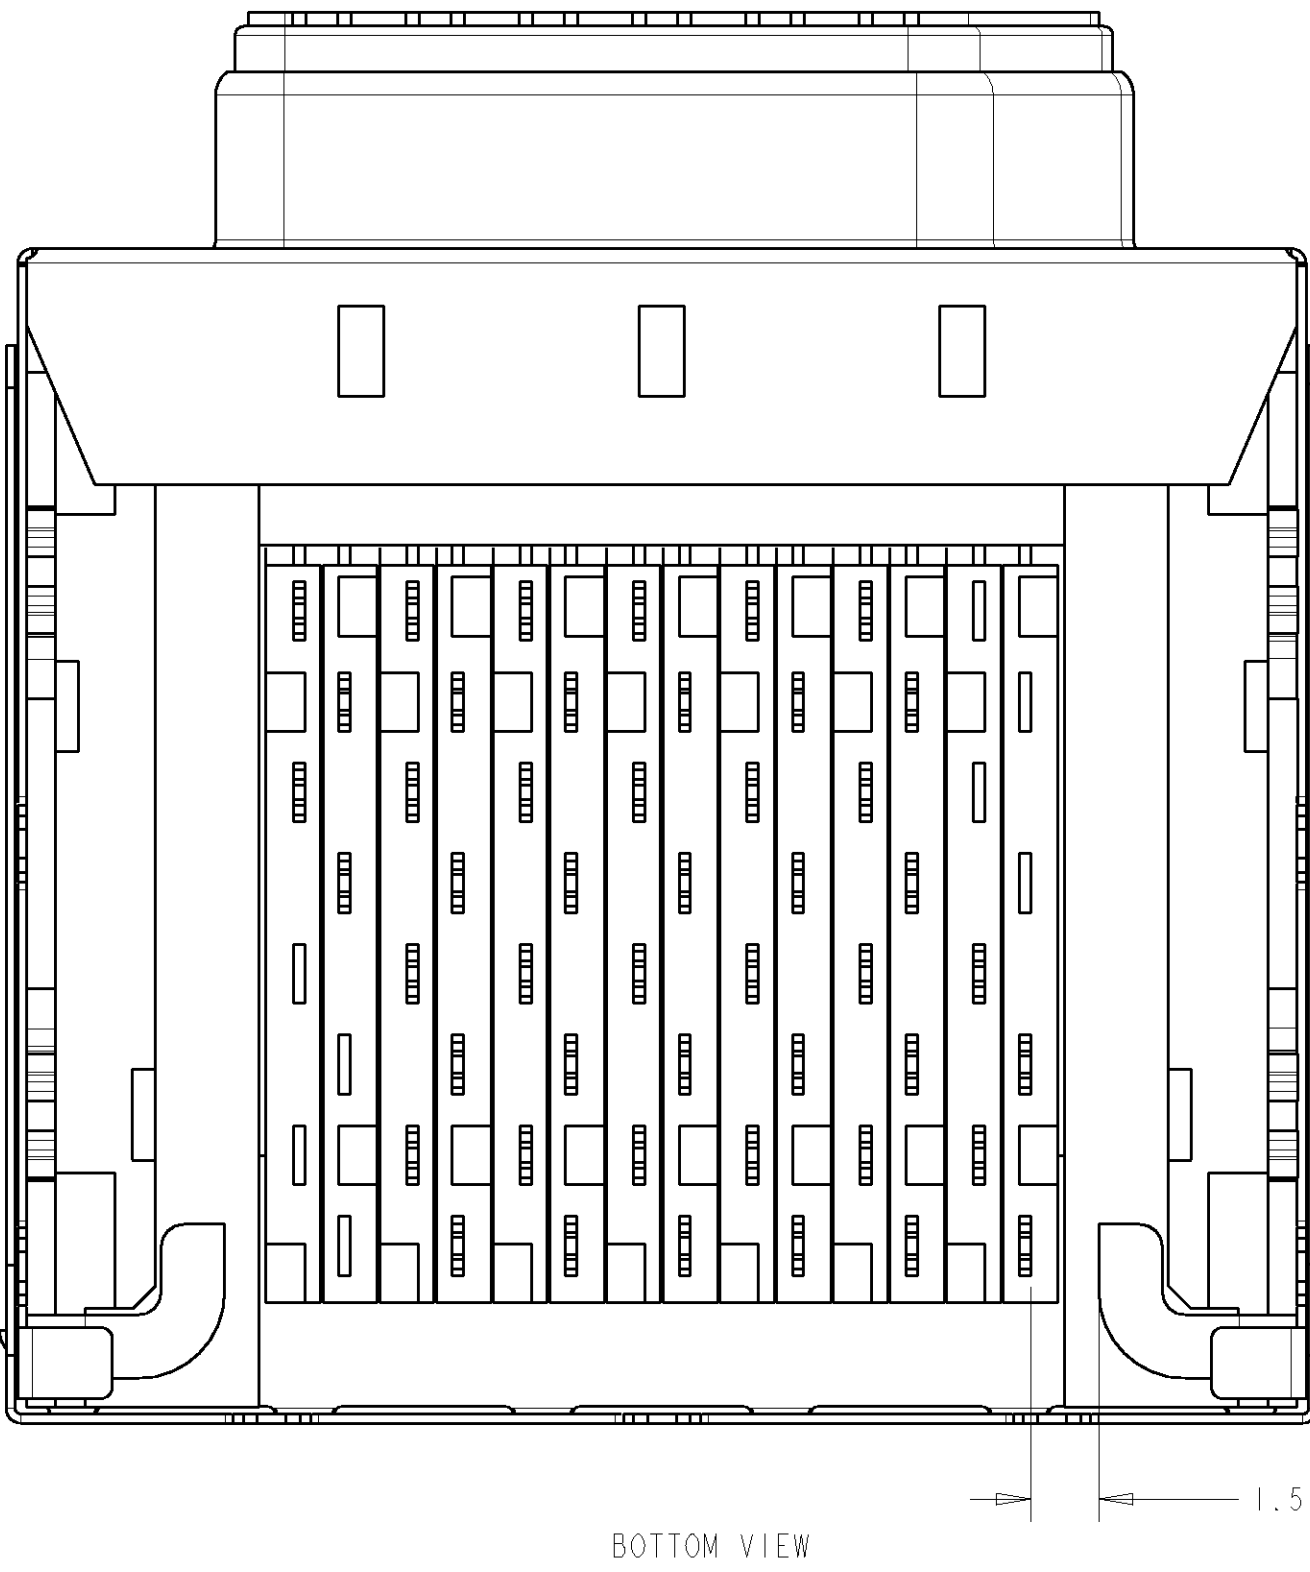
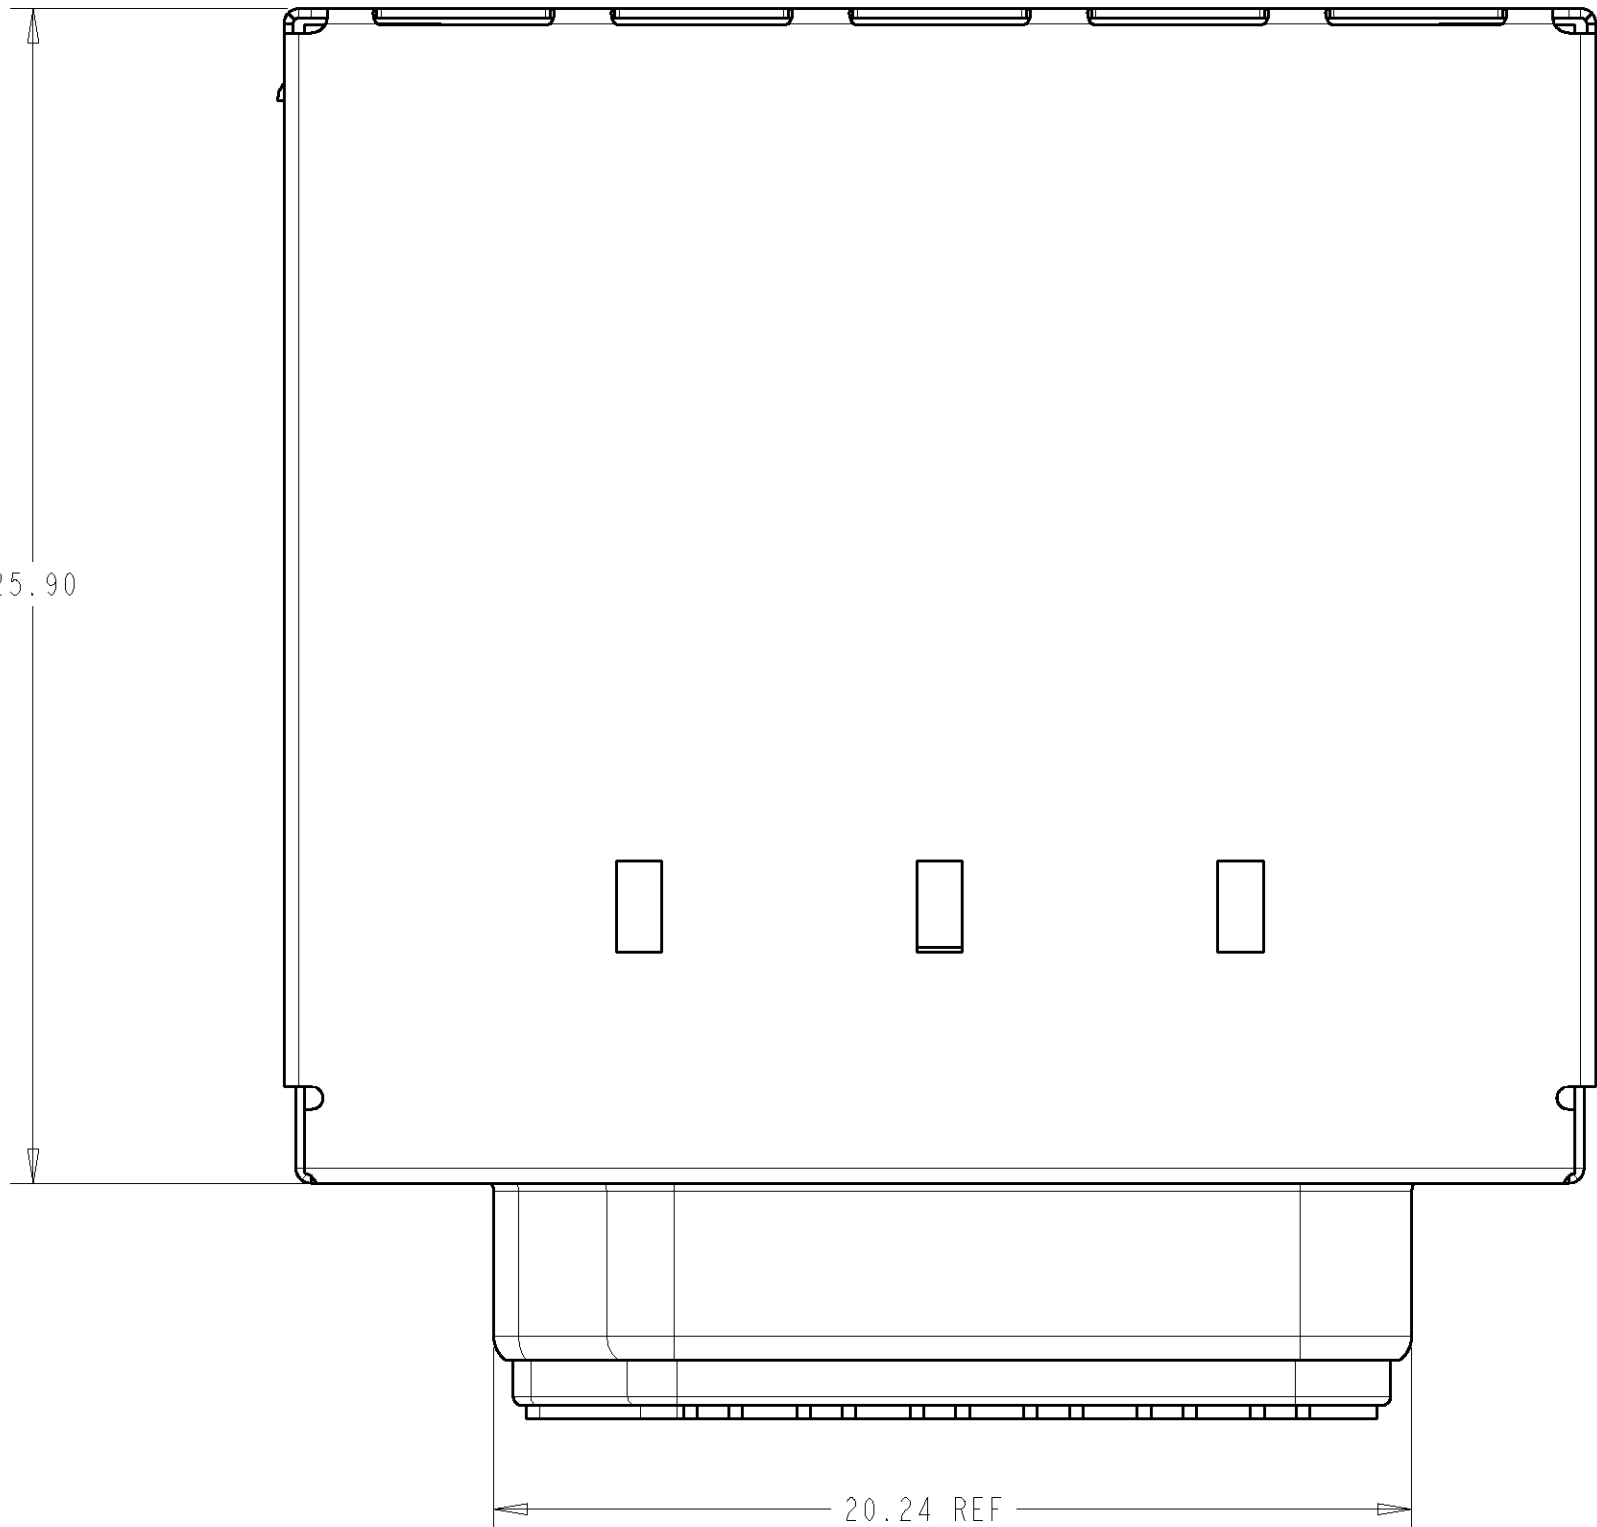
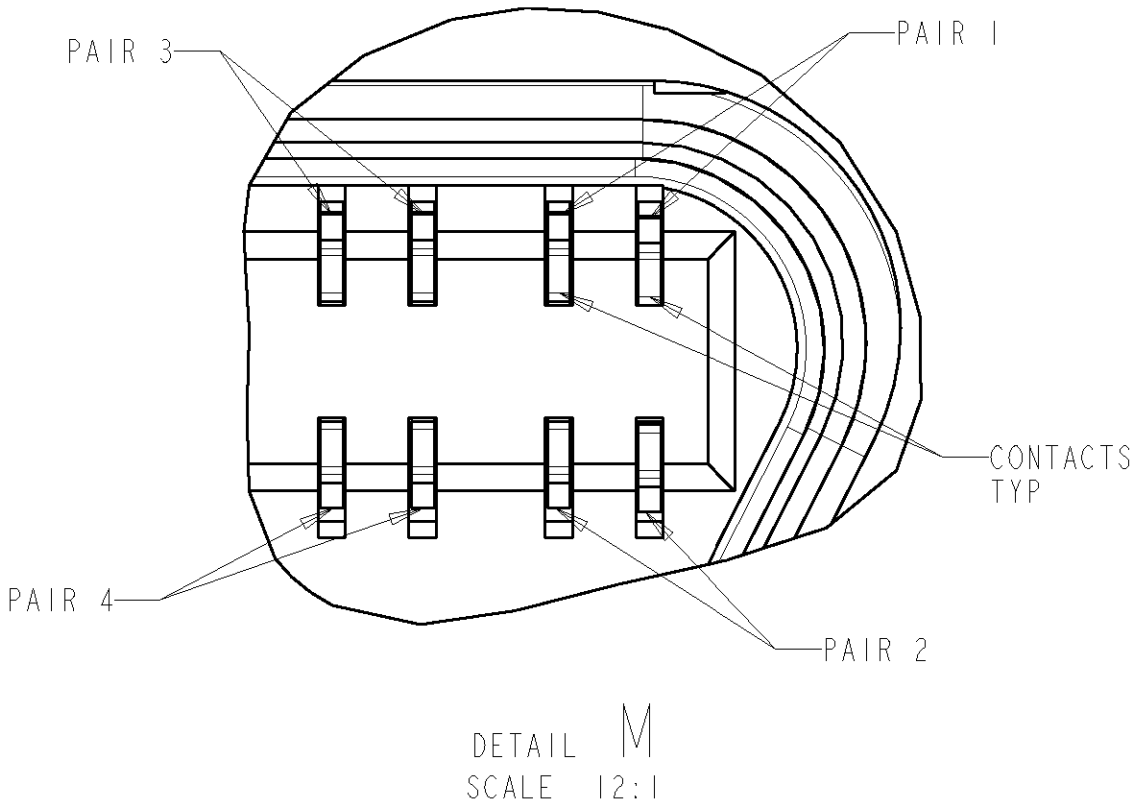
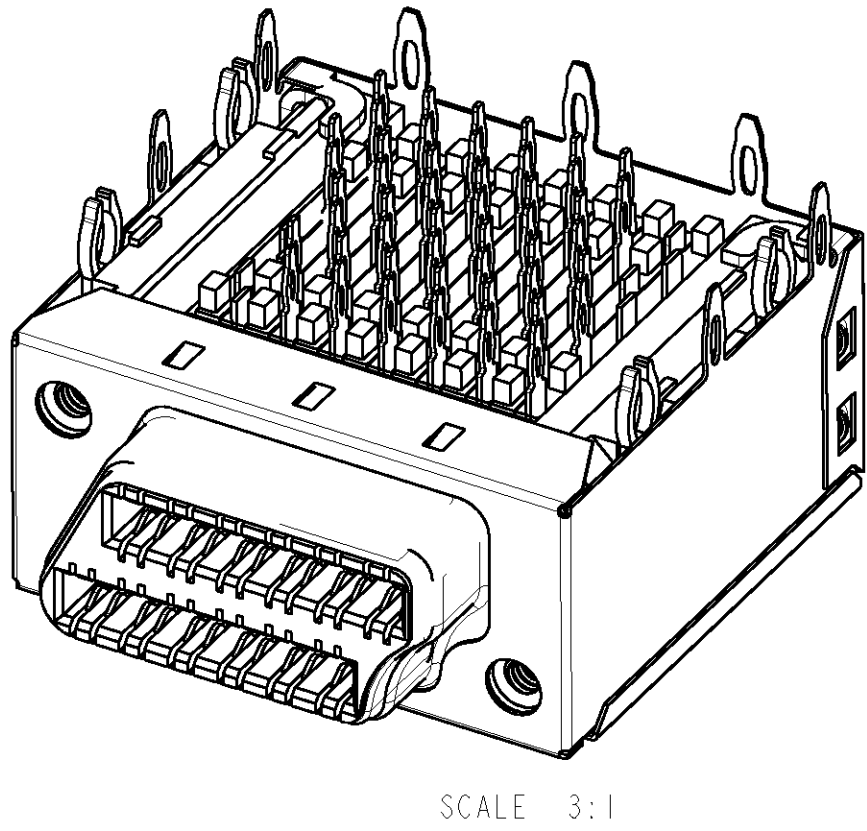
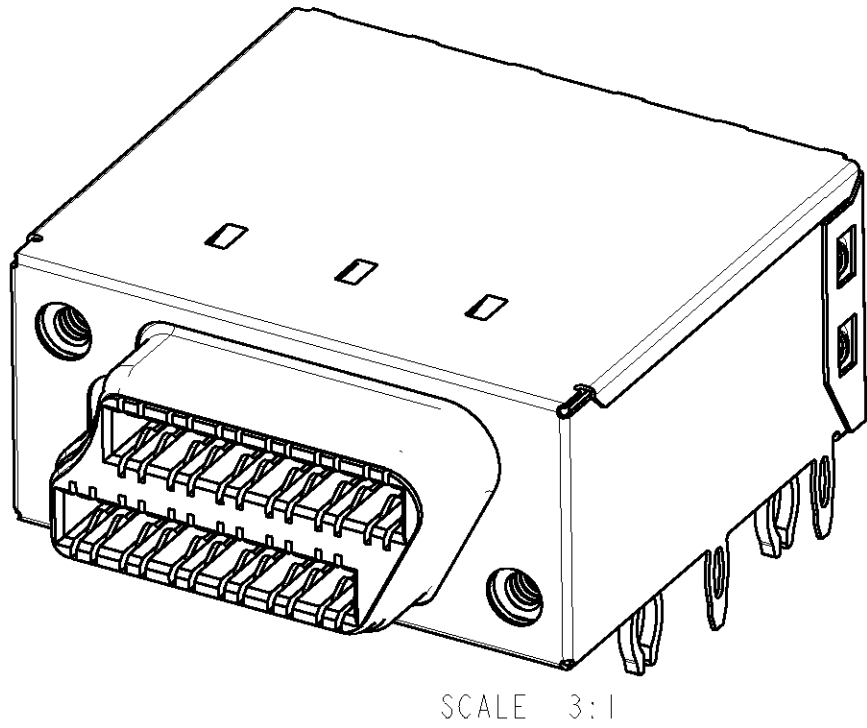


LOC		DIST		REVISONS			
P	LTR	DESCRIPTION		DATE	DWN	APVD	
	A	RELEASED		12FEB2007	RG	PR	

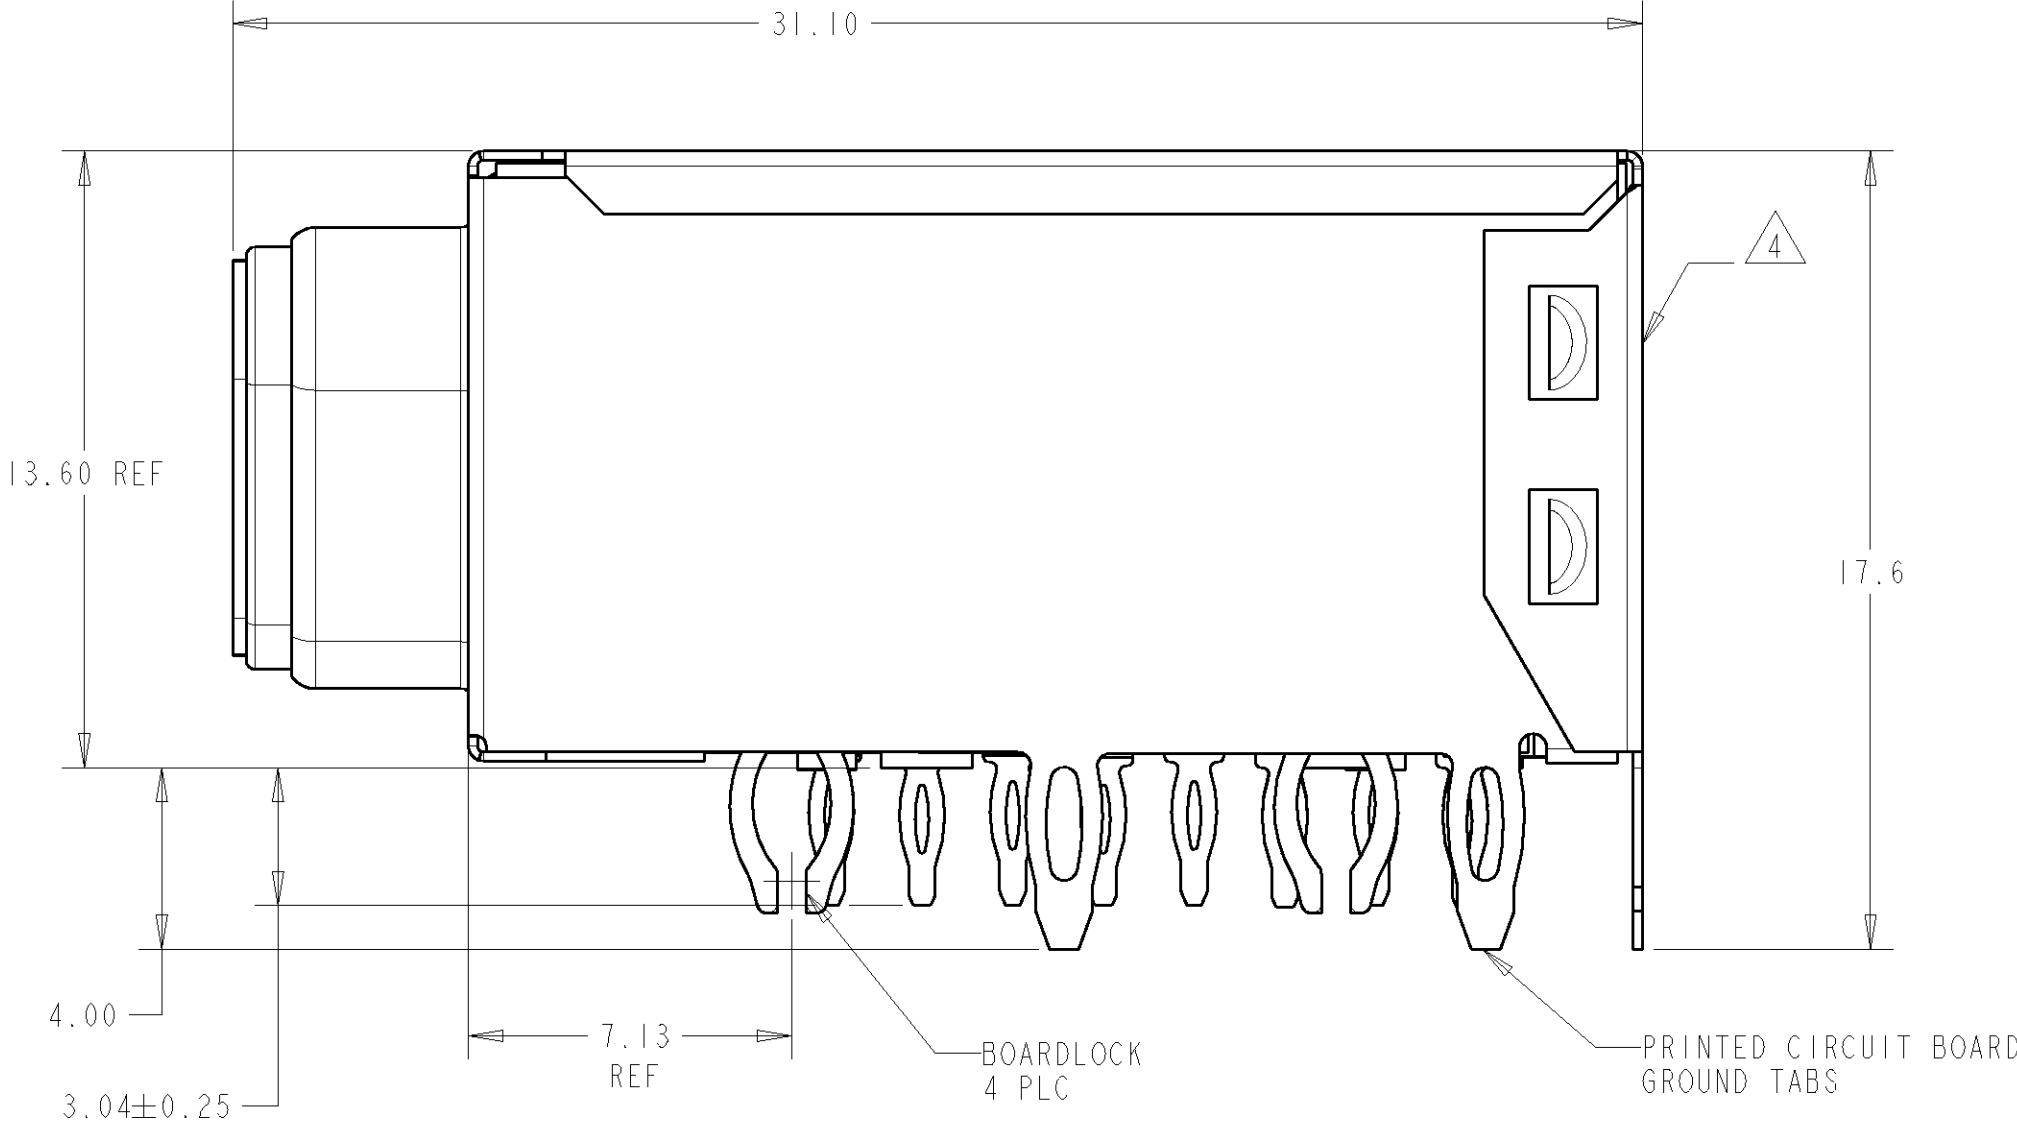


1. MATERIAL:
HOUSING - BLACK THERMOPLASTIC, PBT FLAMMMABILITY RATING UL 94V-0
SHIELD -0.2 MM THICK BRASS - PLATED 1.27µm MIN THK NICKEL.
FRONT DRAWN SHELL - CARBON STEEL - PLATED WITH 5.08µm MIN NICKEL
BOARD LOCKS - BRASS PLATED WITH 1.27µm MIN TIN OVER 1.27µm MIN NICKEL
CONTACTS - 0.254 MM THK. PHOSPHOR BRONZE - ENTIRE TERMINAL PLATED WITH 2.54µm MIN NICKEL. MATING AREA PLATED WITH GOLD FLASH OVER 0.76µm MIN Pd-Ni . PRESS FIT TAILS PLATED WITH 1.98µm MIN TIN
INSERTS, THREADED - MILD STEEL
SCREW LOCKS - STAINLESS STEEL.

- 2 THE SCREW LOCKS ARE FOR USE WITH JACKSCREWS TO PROVIDE CABLE RETENTION. RECOMMENDED TORQUE FOR SCREW LOCK IS 4 IN-LB MAX
3 SCREWLOCK PART NUMBER 1339381-2 OR -4 MUST BE ORDERED SEPARATELY
4 DATE CODE AND PART NUMBER LABEL IN APPROXIMATE AREA SHOWN
5 DATUM AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER

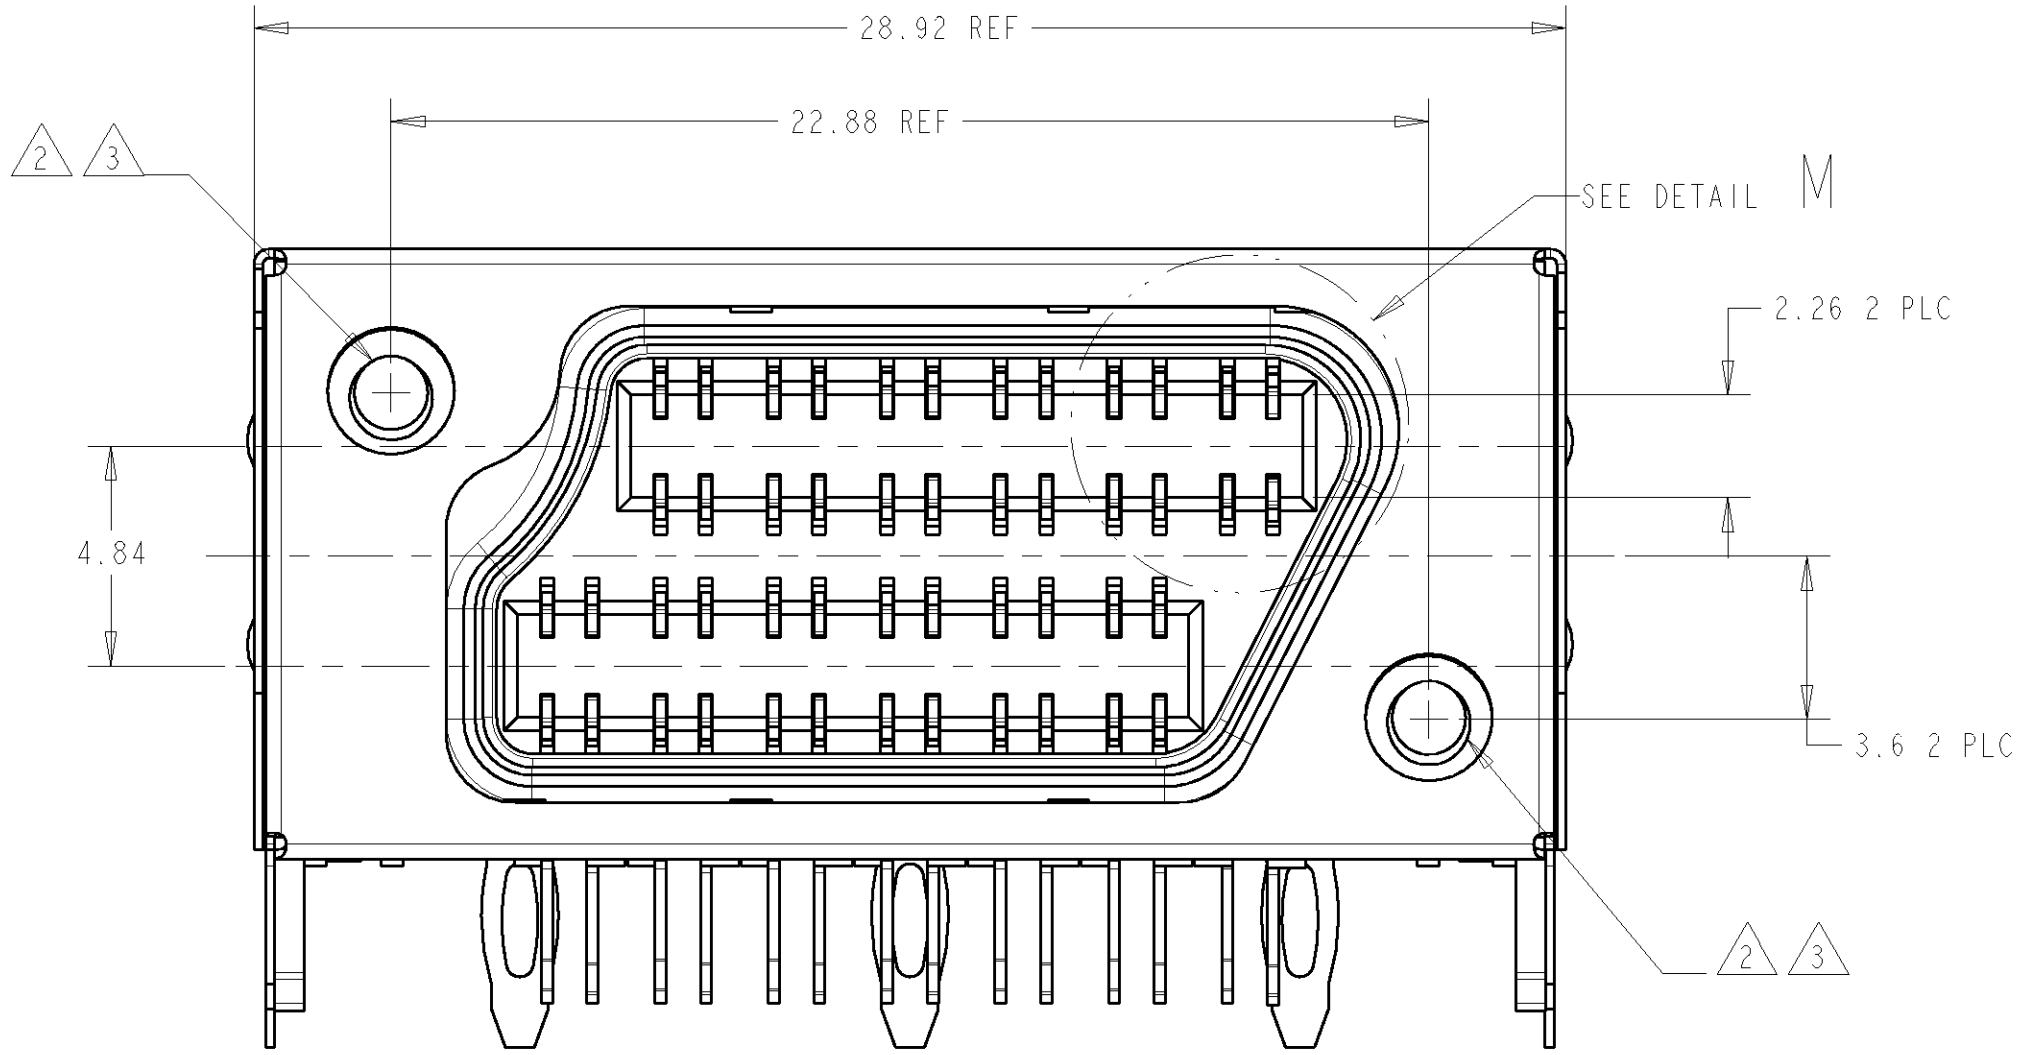

1888844-1		PART NUMBER	
DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:	
mm		0 PLC ±.1 1 PLC ±0.1 2 PLC ±0.10 3 PLC ±.1 4 PLC ±.1 ANGLES ±°	
MATERIAL		SEE NOTE 1	
SEE NOTE 1		SEE NOTE 1	
CUSTOMER DRAWING		CUSTOMER DRAWING	
DWN		21DEC2006	
CHK		21DEC2006	
P. RECCE		21DEC2006	
APVD		21DEC2006	
S. FLICKINGER		21DEC2006	
PRODUCT SPEC		108-2064	
APPLICATION SPEC		-	
WEIGHT		-	
CUSTOMER DRAWING		CUSTOMER DRAWING	
SIZE		A	
CAGE CODE		00779	
DRAWING NO		C=1888844	
RESTRICTED TO		-	
SCALE		6:1	
SHEET		1 OF 3	
REV		A	

LOC	DIST	REVISIONS					
AA	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-		SEE SHEET 1	-	-	-

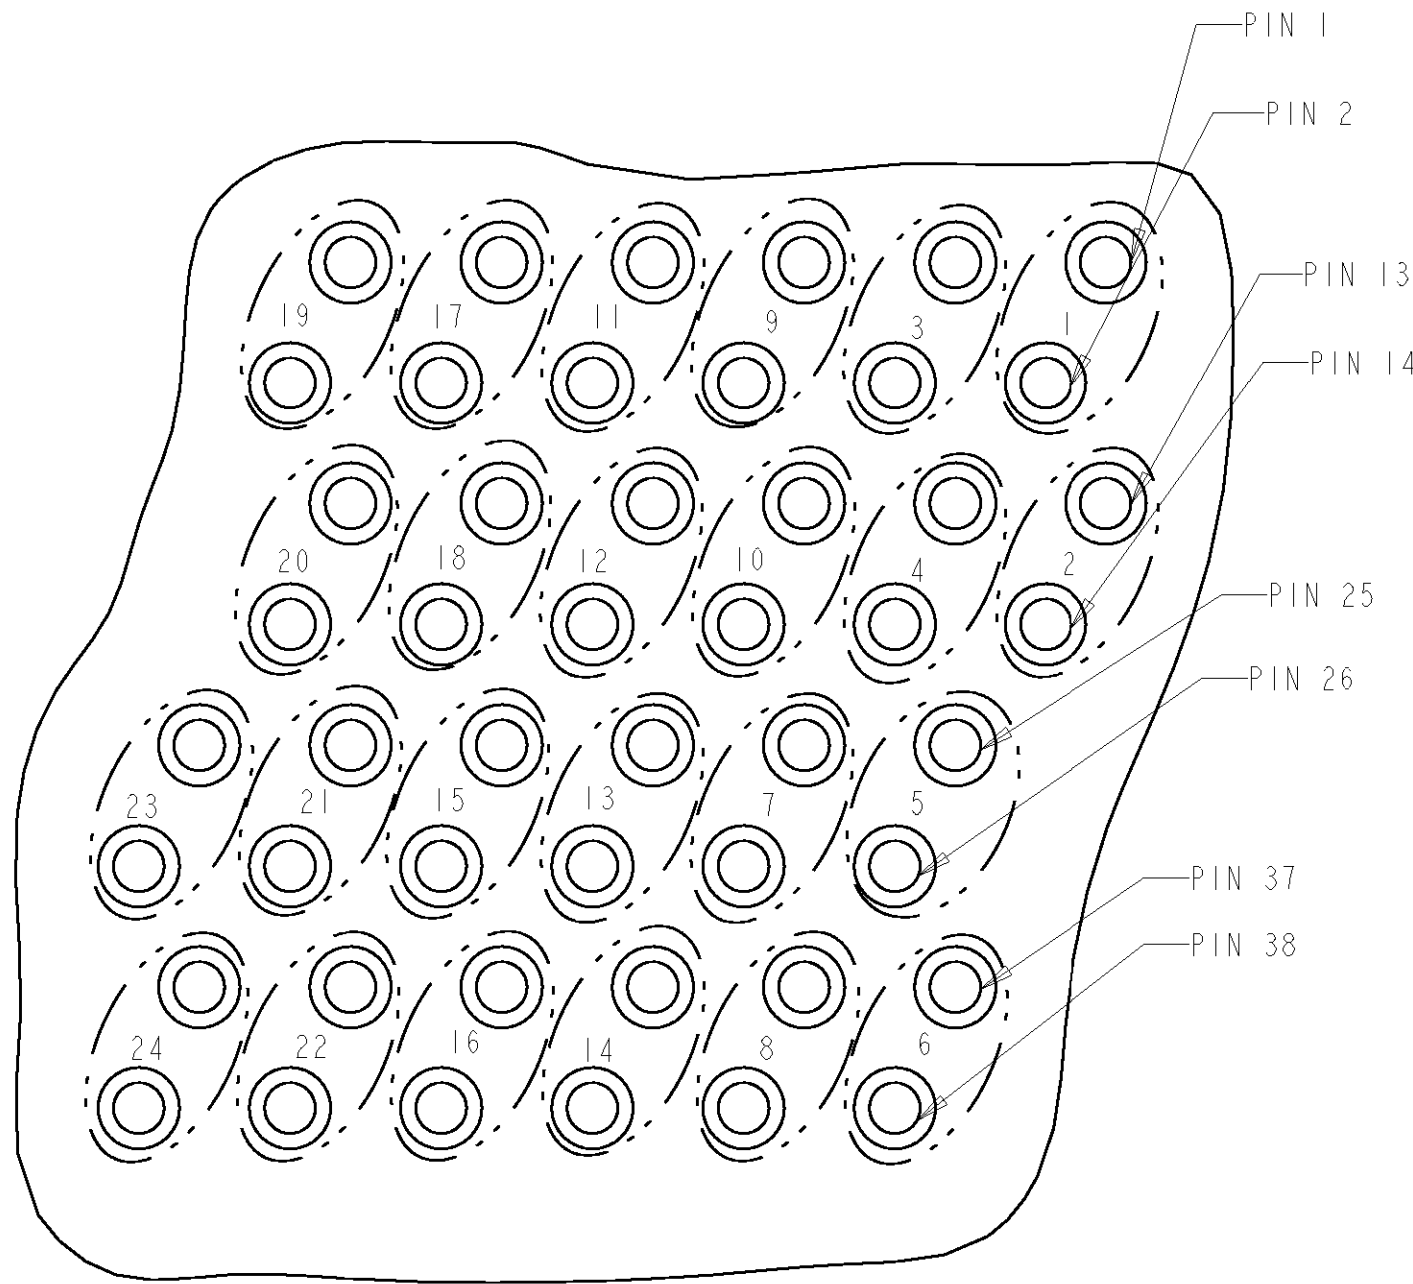

PROPOSED PAIR GROUPING

MODULAR PLUG AND RJ-21 PIN-OUT FOR USE IN 10/100/1000 BASE-T APPLICATIONS

GIG ETHERNET PORT	PLUG POSN.	COLOR	10/100 ETHERNET PORT	PLUG POSN.	COLOR	RJ-21 PIN	MRJ 21 PIN	MRJ 21 PAIR NUM
1	5	WHT/BLU	1	1	WHT/BLU	26	1	1
	4	BLU/WHT		2	BLU/WHT	1	2	
	3	WHT/ORG		3	WHT/ORN	27	13	2
	6	ORG/WHT		6	ORN/WHT	2	14	
	1	WHT/GRN	2	1	WHT/GRN	28	3	3
	2	GRN/WHT		2	GRN/WHT	3	4	
	7	WHT/BRN		3	WHT/BRN	29	15	4
	8	BRN/WHT		6	BRN/WHT	4	16	
2	5	WHT/GRY	3	1	WHT/GRY	30	25	5
	4	GRY/WHT		2	GRY/WHT	5	26	
	3	RED/BLU		3	RED/BLU	31	37	6
	6	BLU/RED		6	BLU/RED	6	38	
	1	RED/ORG	4	1	RED/ORN	32	27	7
	2	ORG/RED		2	ORN/RED	7	28	
	7	RED/GRN		3	RED/GRN	33	39	8
	8	GRN/RED		6	GRN/RED	8	40	
3	5	RED/BRN	5	1	RED/BRN	34	5	9
	4	BRN/RED		2	BRN/RED	9	6	
	3	RED/GRY		3	RED/GRAY	35	17	10
	6	GRY/RED		6	GRY/RED	10	18	
	1	BLK/BLU	6	1	BLK/BLU	36	7	11
	2	BLU/BLK		2	BLU/BLK	11	8	
	7	BLK/ORG		3	BLK/ORN	37	19	12
	8	ORG/BLK		6	ORN/BLK	12	20	
4	5	BLK/GRN	7	1	BLK/GRN	38	29	13
	4	GRN/BLK		2	GRN/BLK	13	30	
	3	BLK/BRN		3	BLK/BRN	39	41	14
	6	BRN/BLK		6	BRN/BLK	14	42	
	1	BLK/GRY	8	1	BLK/GRY	40	31	15
	2	GRY/BLK		2	GRY/BLK	15	32	
	7	YEL/BLU		3	YEL/BLU	41	43	16
	8	BLU/YEL		6	BLU/YEL	16	44	
5	5	YEL/ORG	9	1	YEL/ORN	42	9	17
	4	ORG/YEL		2	ORN/YEL	17	10	
	3	YEL/GRN		3	YEL/GRN	43	21	18
	6	GRN/YEL		6	GRN/YEL	18	22	
	1	YEL/BRN	10	1	YEL/BR	44	11	19
	2	BRN/YEL		2	BR/YEL	19	12	
	7	YEL/GRY		3	YEL/GRY	45	23	20
	8	GRY/YEL		6	GRY/YEL	20	24	
6	5	VIO/BLU	11	1	VIO/BLU	46	33	21
	4	BLU/VIO		2	BLU/VIO	21	34	
	3	VIO/ORG		3	VIO/ORN	47	45	22
	6	ORG/VIO		6	ORN/VIO	22	46	
	1	VIO/GRN	12	1	VIO/GRN	48	35	23
	2	GRN/VIO		2	GRN/VIO	23	36	
	7	VIO/BRN		3	VIO/BRN	49	47	24
	8	BRN/VIO		6	BRN/VIO	24	48	

THIS DRAWING IS UNPUBLISHED. IT IS THE PROPERTY OF TYCO ELECTRONICS CORPORATION. IT IS TO BE USED ONLY FOR THE PURPOSES AND IN THE MANNER SPECIFIED BY THE CONTROLLING ENGINEERING ORGANIZATION. IT IS NOT TO BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM. WITHOUT PERMISSION IN WRITING FROM TYCO ELECTRONICS CORPORATION, THIS DRAWING IS TO BE DESTROYED.

LOC: AA DIST: 00

DATE: 21DEC2006

BY: R. GRZYBOWSKI

CHKD: P. RECCE

APVD: S. FLICKINGER

NAME: ASSEMBLY, MRJ21 RECEPTACLE, 48 POSITION, PRESS FIT

PRODUCT SPEC: 108-2064

APPLICATION SPEC: -

WEIGHT: -

CUSTOMER DRAWING

DIMENSIONS:

mm

9 PLC ±.1

2 PLC ±0.10

3 PLC ±.1

4 PLC ±.1

ANGLES: ±.0°

FINISH: SEE NOTE 1

TOLERANCES UNLESS OTHERWISE SPECIFIED:

9 PLC ±.1

2 PLC ±0.10

3 PLC ±.1

4 PLC ±.1

ANGLES: ±.0°




FINISH: SEE NOTE 1

TYCO Electronics

Tyco Electronics Harrisburg, PA 17105-3608

SCALE: 6:1 SHEET: 2 OF 3 REV: A

LOC		DIST		REVISONS			
AA	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-		SEE SHEET 1	-	-	-

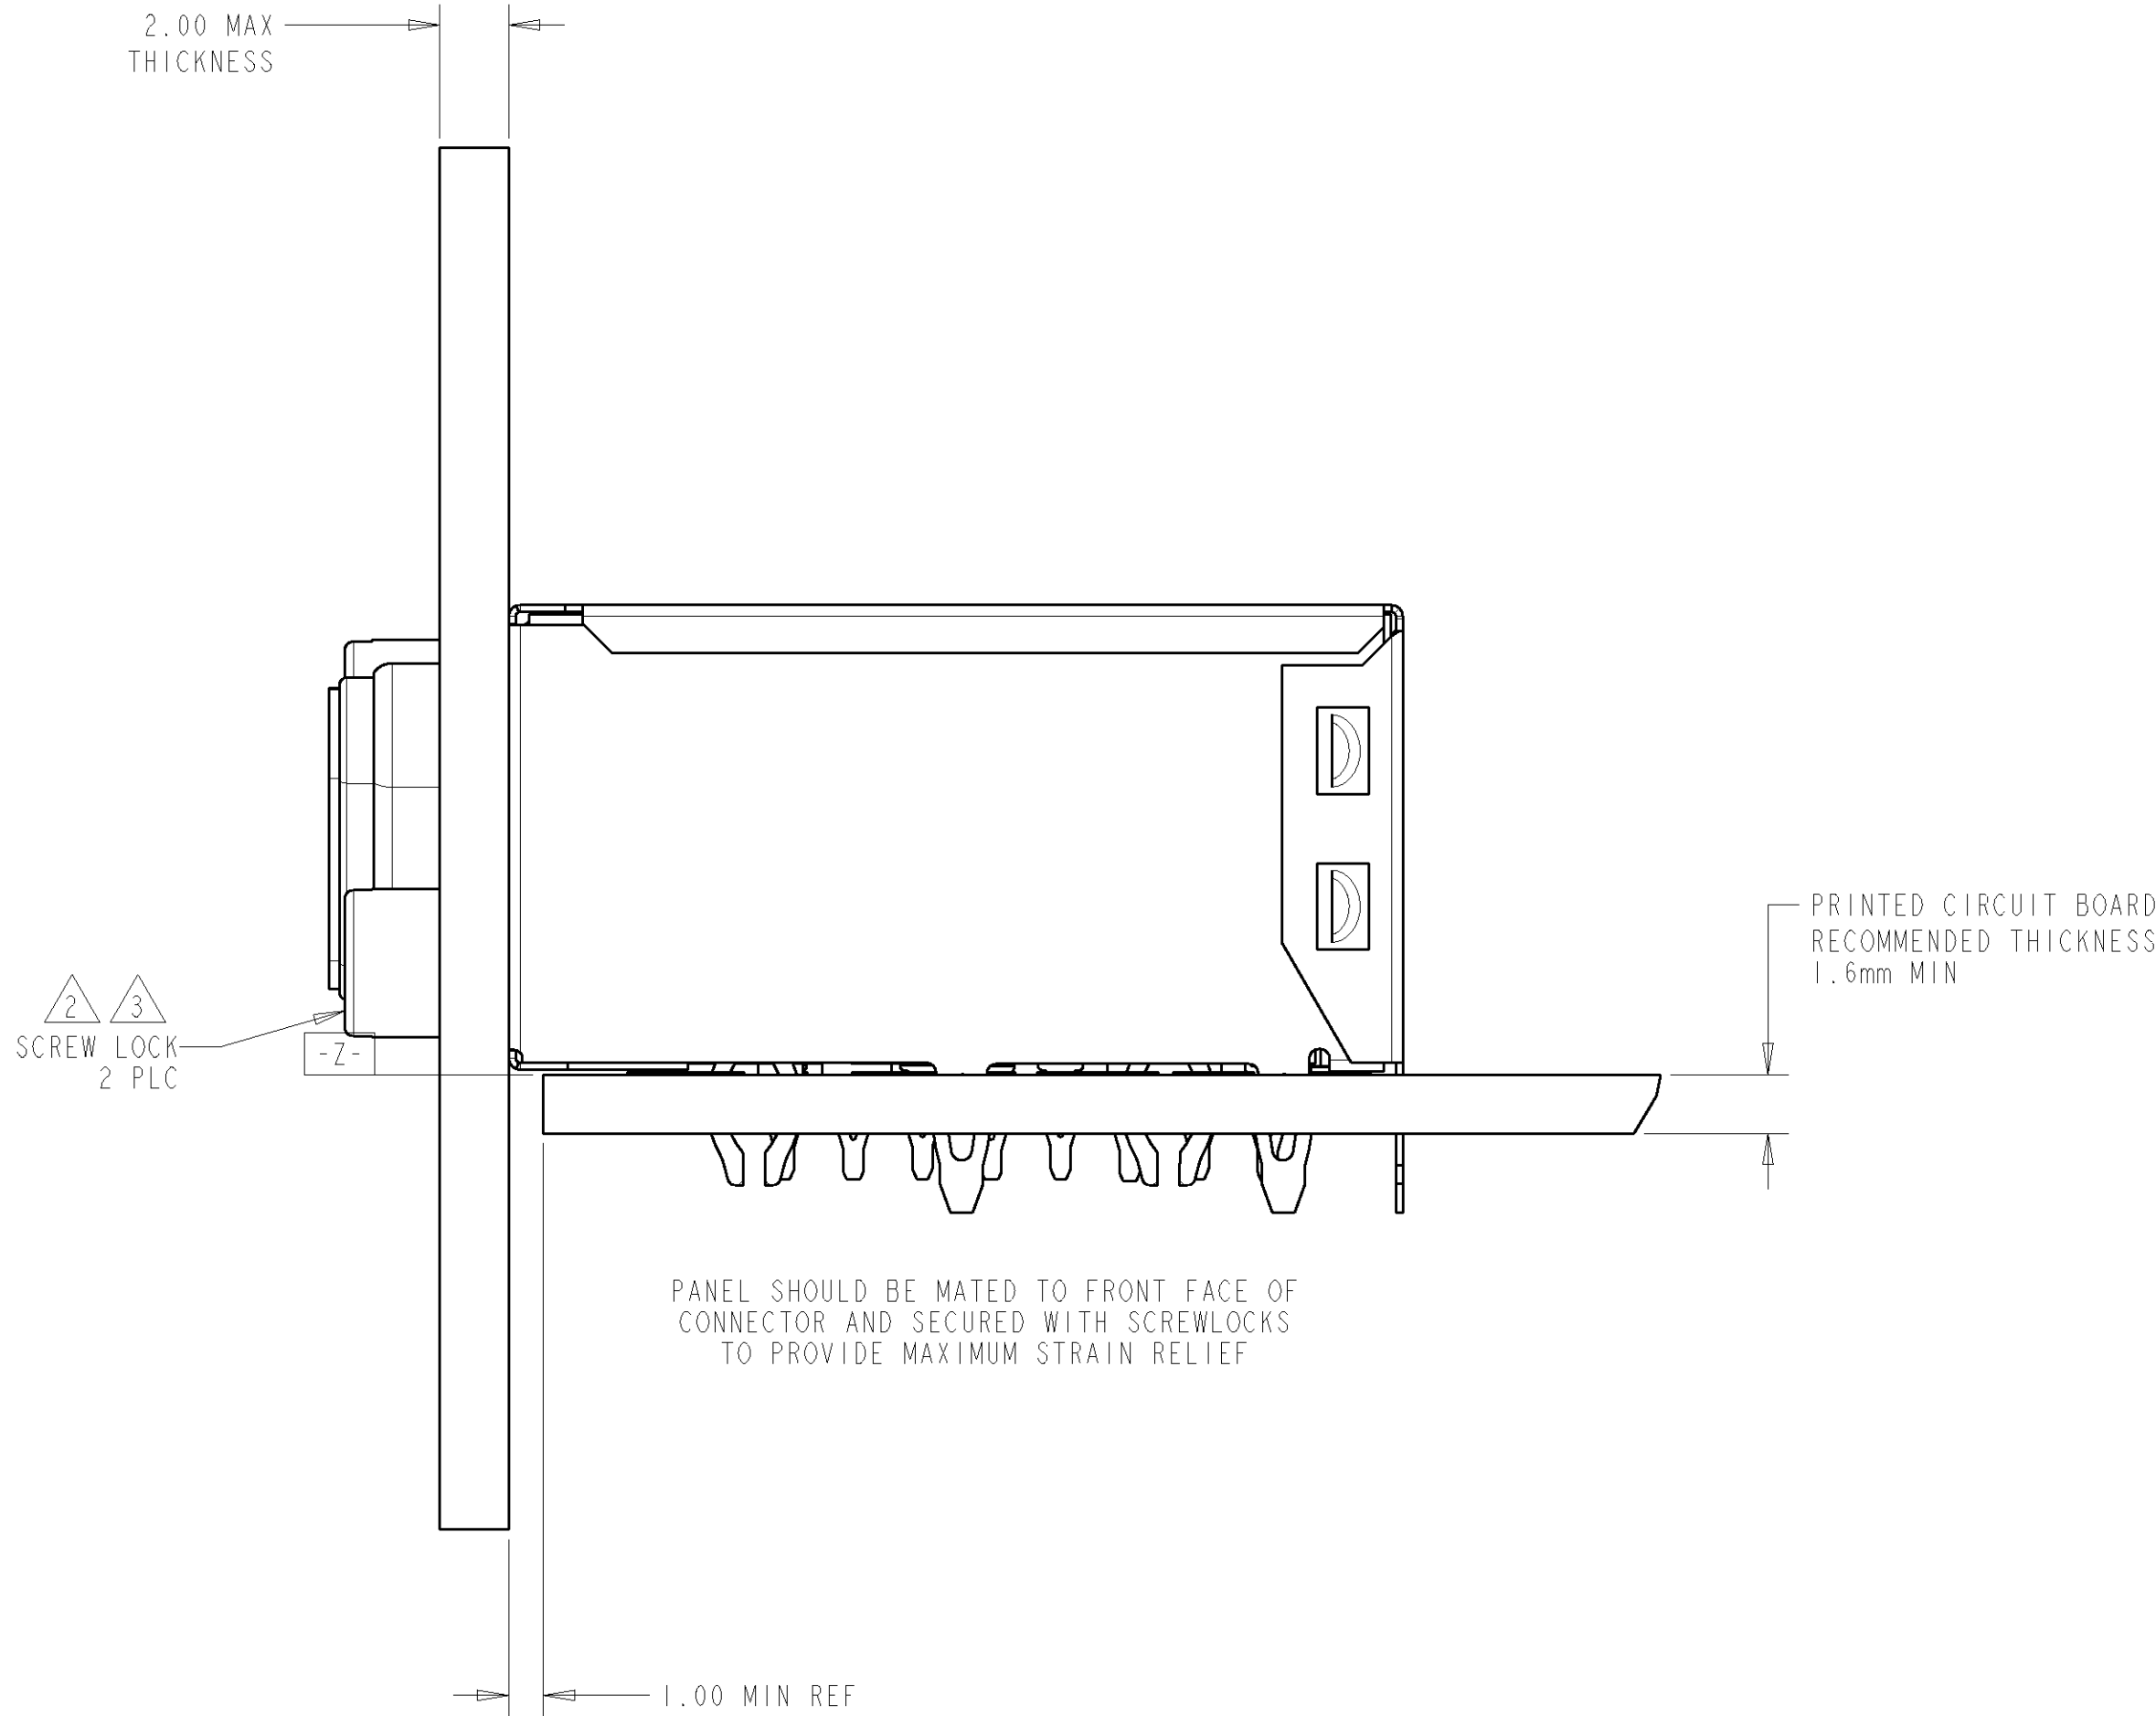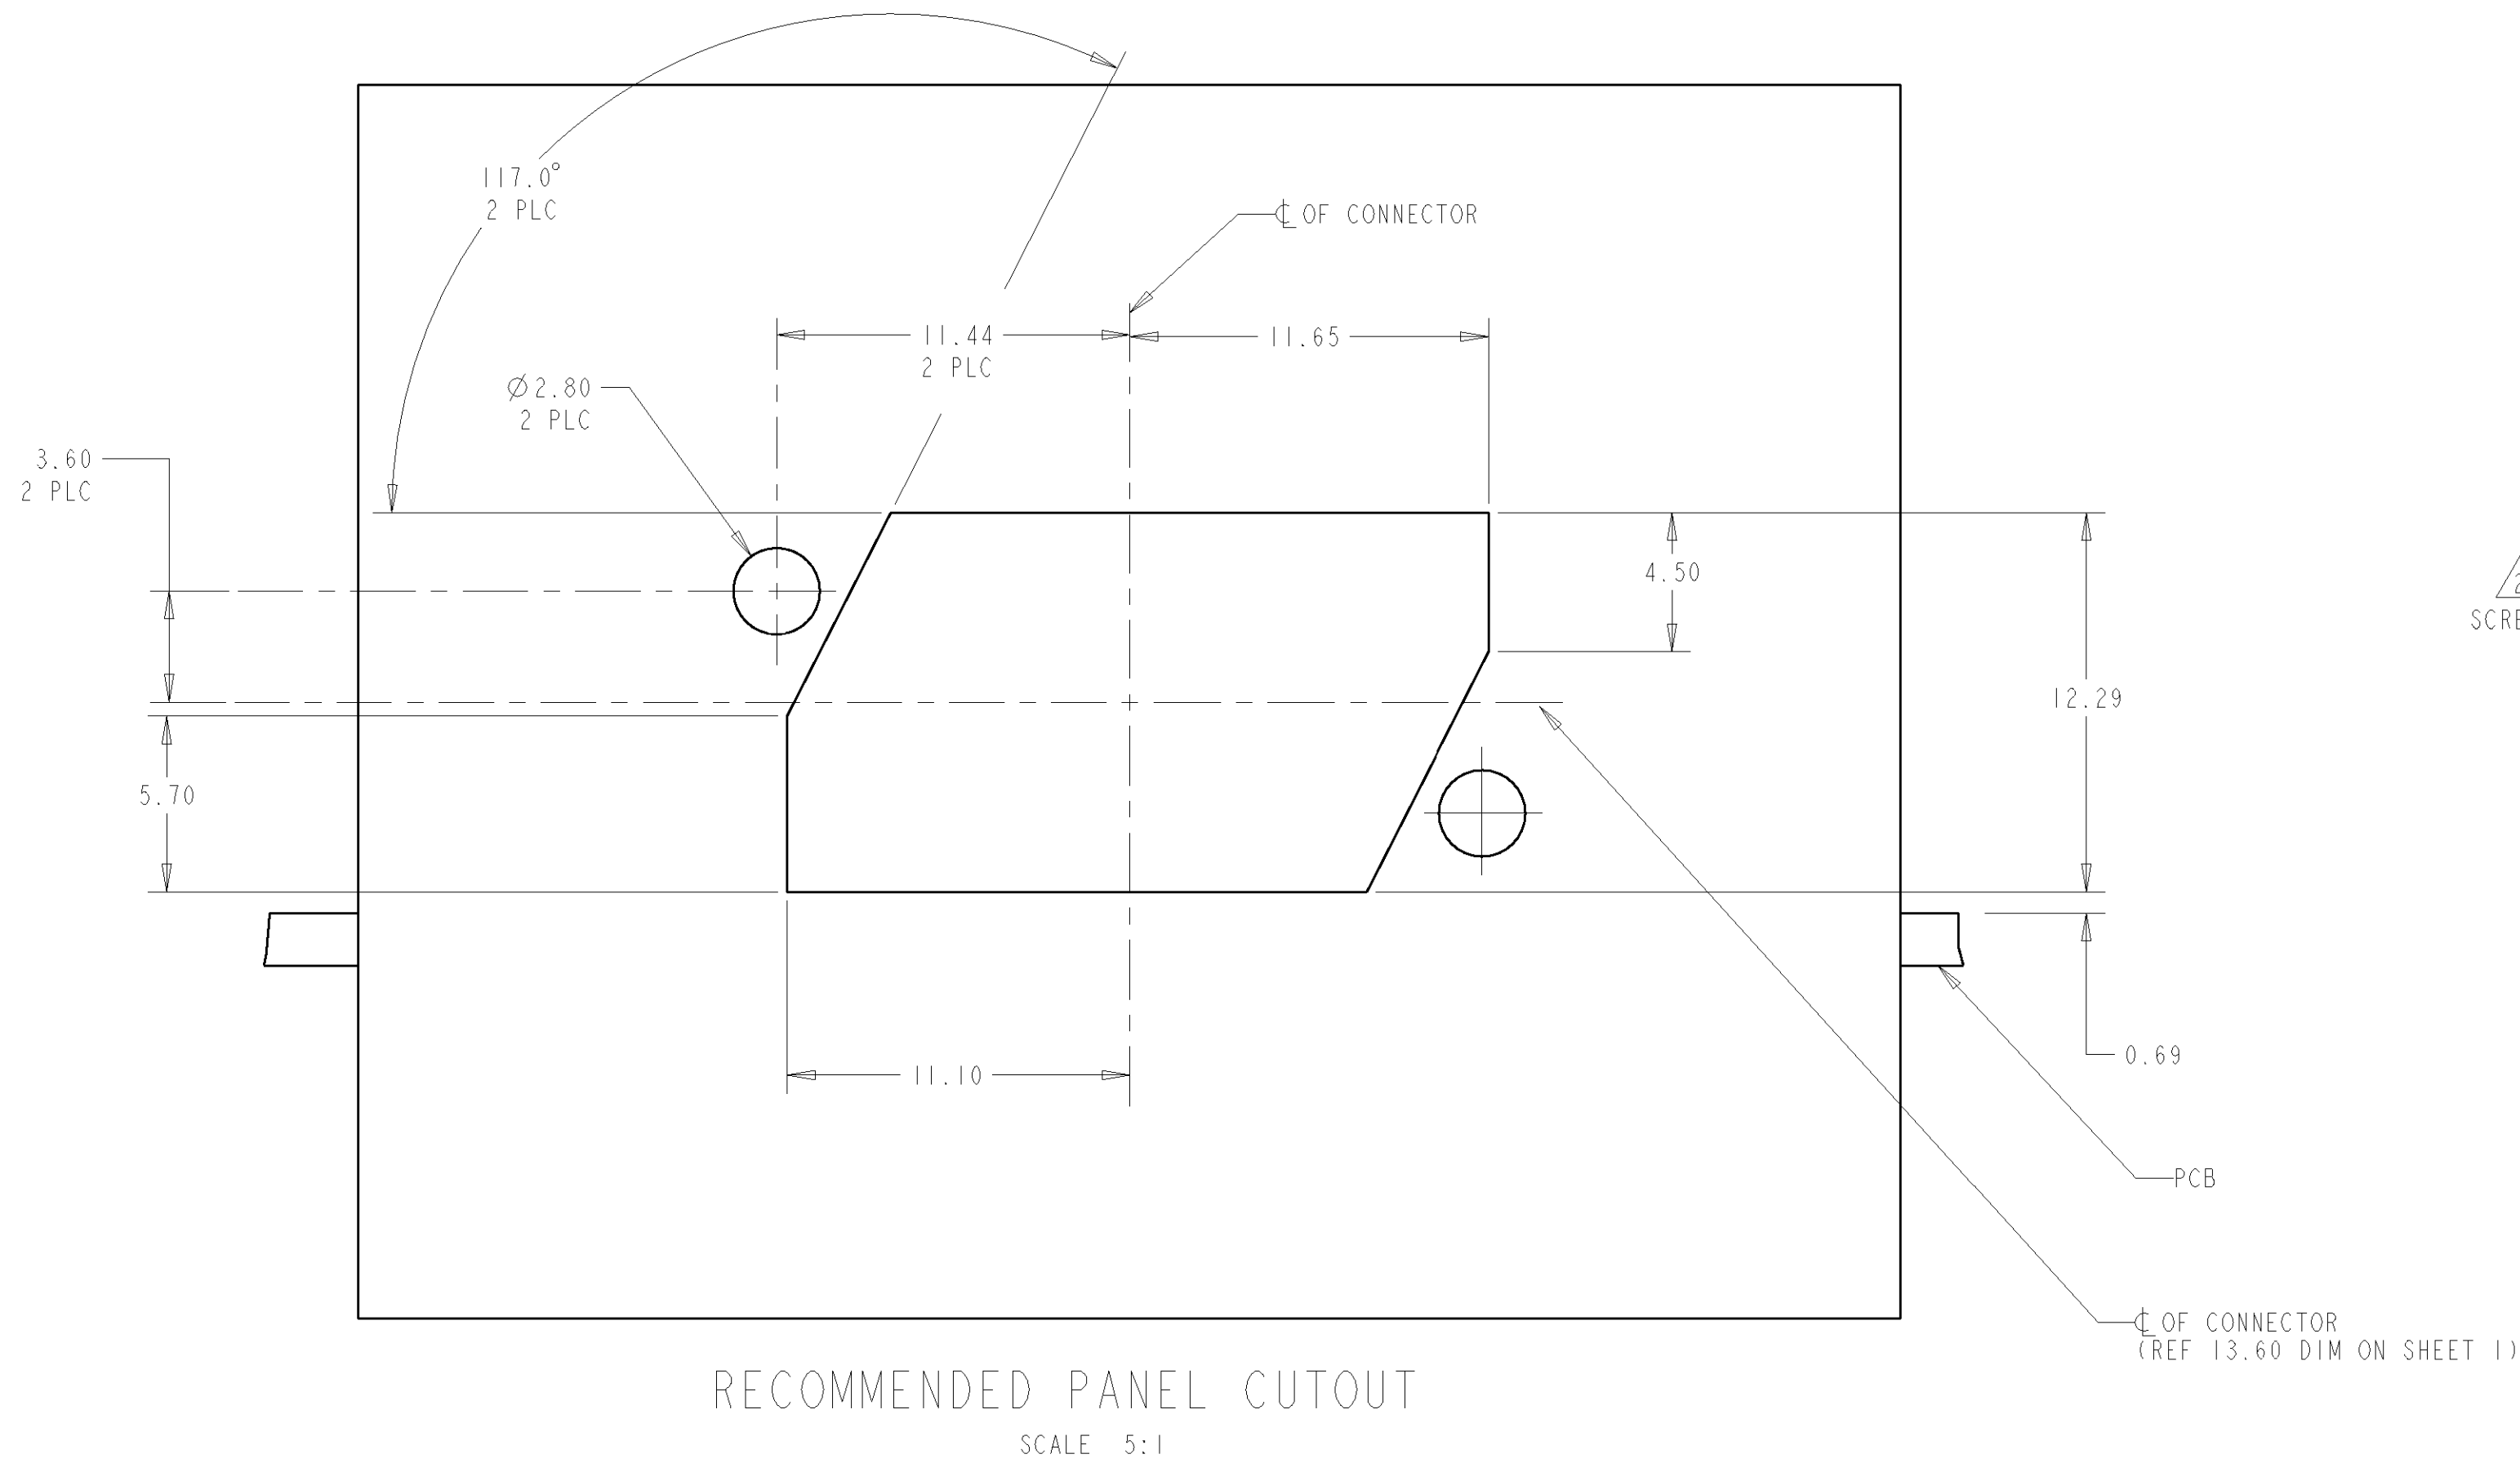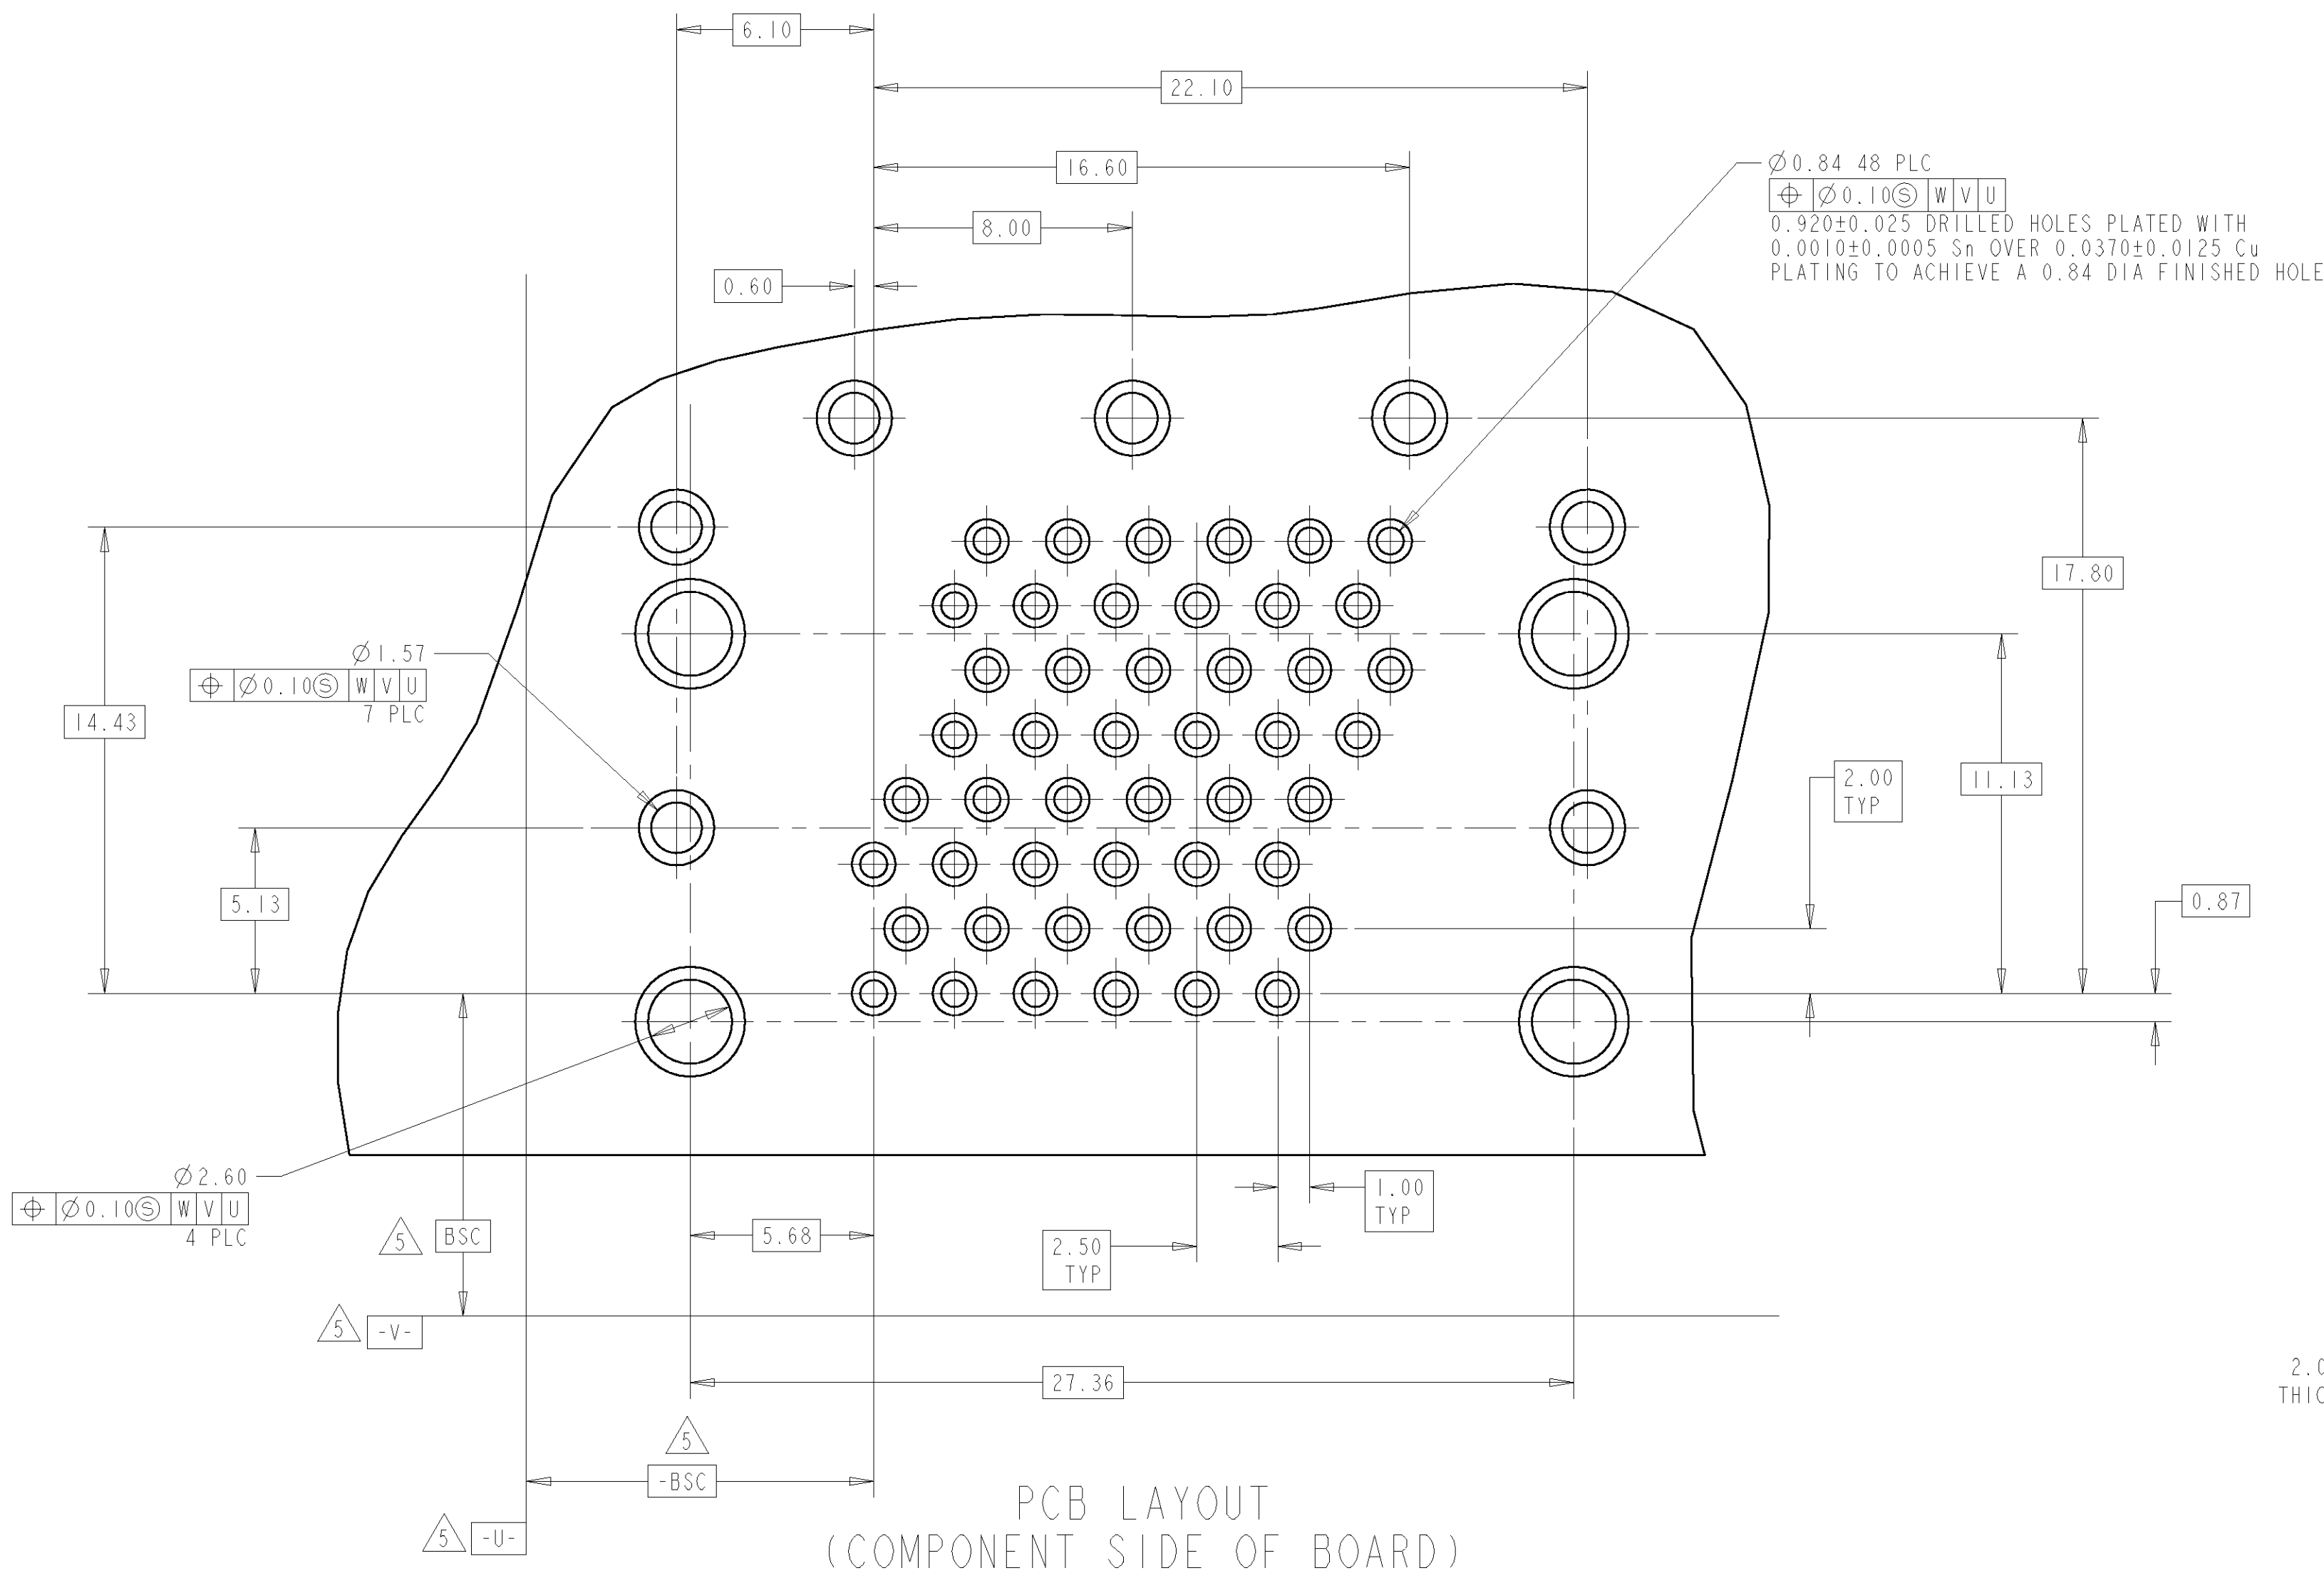

THIS DRAWING IS UNPUBLISHED. BY TYCO ELECTRONICS CORPORATION, ALL RIGHTS RESERVED.				DWN: R. GRZYBOWSKI 21DEC2006				Tyco Electronics Harrisburg, PA 17105-3608			
CHK: P. RECCE 21DEC2006				NAME: S. FLICKINGER				ASSEMBLY, MRJ21 RECEPTACLE, 48 POSITION, PRESS FIT			
APVD: S. FLICKINGER				PRODUCT SPEC: 108-2064				SIZE: A 00779 C=1888844			
APPLICATION SPEC: -				WEIGHT: -				RESTRICTED TO: -			
MATERIAL: SEE NOTE 1				FINISH: SEE NOTE 1				CUSTOMER DRAWING			
DIMENSIONS: mm				TOLERANCES UNLESS OTHERWISE SPECIFIED:				SCALE: 6:1			
Ø				9 PLC ±				SHEET 3 OF 3			
				1 PLC ±0.1				REV A			
				2 PLC ±0.10							
				3 PLC ±							
				4 PLC ±							
				ANGLES ±°							



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.