

# USB2GPIOISO# Adapter Board

# Evaluates: USB2GPIOISO

## General Description

The USB2GPIOISO# adapter board, shown in [Figure 1](#), is designed to work with Maxim's USB2GPIO# adapter board to provide galvanic isolation between the 'master' USB adapter board and a 'slave' EV kit or Pmod™ board. Four MAX14483 6-channel digital isolators are used to provide 3.75kV<sub>RMS</sub> isolation.

USB2GPIOISO# block diagram is shown in [Figure 2](#). The two power domains are on the 'master' side (VDD\_M and GNDM), and the 'slave' side (VDD\_S and GNDS). The two independent power supplies are provided from the master board and the slave board with each VDD\_ between 1.71V and 5.5V. The two connectors on the 'master' side are male connectors and plug into the female connectors on the USB2GPIO# adapter, as shown in [Figure 3](#).

USB2GPIOISO# is also designed to work with legacy USB2PMB1# and USM2PMB2# adapters; connectors XMA and XSA are 12-pin connectors which support either SPI with 4 GPIO pins and are fully compatible with previous adapters and low-pin count EV kit or Pmod boards. These connectors are controlled from the Munich GUI or relevant EV kit GUIs. Note that the isolator ICs have unidirectional channels (in or out). Full bidirectional I<sup>2</sup>C communication is not supported by this board.

The other connectors, XMB and XSB, are 20-pin connectors supporting extra GPIO connections. These 20-pin connectors are NOT controlled by the Munich GUI but are for use with future EV kits and will be controlled by the relevant EV kit GUIs.

USB2GPIOISO# adapter board can be used to enable isolated USB-to-SPI/GPIO interface for any Pmod-compatible plug-in peripheral modules such as the Maxim MAX14001PMB, and MAXREFDES12-Corona reference design.

## Features

- 24 Isolated Channels with 3.75kV<sub>RMS</sub> Robust Galvanic Isolation
- Low Propagation Delay 10ns, Typical
- Flexible System Design with Wide 1.71V to 5.5V Voltage Range on Each Side
- Small PCB area
- Pmod-Compatible Form Factor

Ordering Information appears at end of data sheet.

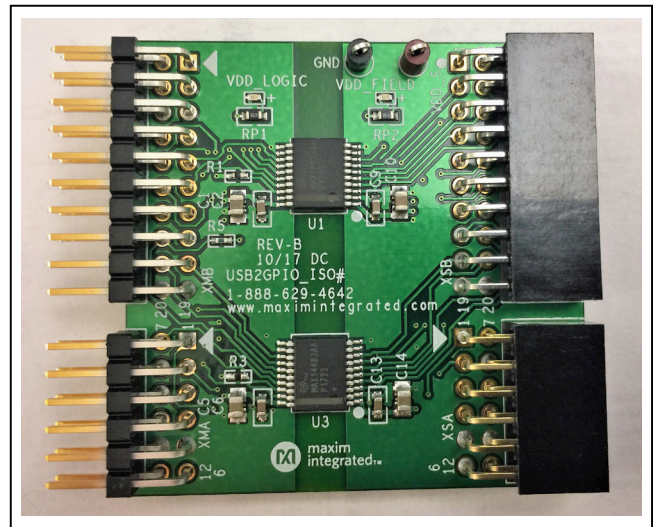


Figure 1. USB2GPIOISO# Board

Pmod™ is a trademark of Digilent, Inc.

Detailed Description of Hardware

Figure 2 shows the USB2GPIOISO# connector block diagram (taken from the schematic). Note that the 'arrow' on each connector indicates the flow of data. For example, pin 1 on XMA shows that the signal (CS\_AM) comes from the master, passes through the male connector, and onto USB2GPIOISO# board to the isolator channel for CS. Then, on the slave side of the isolator, this signal routes to pin 1 on XSA connector (CS\_AS) and the 'arrow' shows the direction is from the isolator, through the female connector and to the slave board.

The two power domains are on the 'master' side (VDD\_M and GNDM), and the 'slave' side (VDD\_S and GNDS). The two independent power supplies are provided from the master board and the slave board with each VDD\_ between 1.71V and 5.5V. The two connectors on the 'master' side are male connectors and plug into the female connectors on the USB2GPIO# adapter, as shown in Figure 3.

MAX14483 has unidirectional data channels and USB2GPIOISO# is configured in a 14/10 mode rather than a bidirectional I/O mode, meaning there are 14 channels communicating from the master to the slave, and 10 channels communicating from the slave to the master. Refer to the [USB2GPIOISO# Adapter Board Schematic](#) for each channel's communication direction. The digital channels on the slave Pmods or EV kits should follow the same communication directions as on the USB2GPIOISO# board. The Munich GUI and the EV kit GUI automatically configure the channel directions based on this and no jumpers are required for configuration.

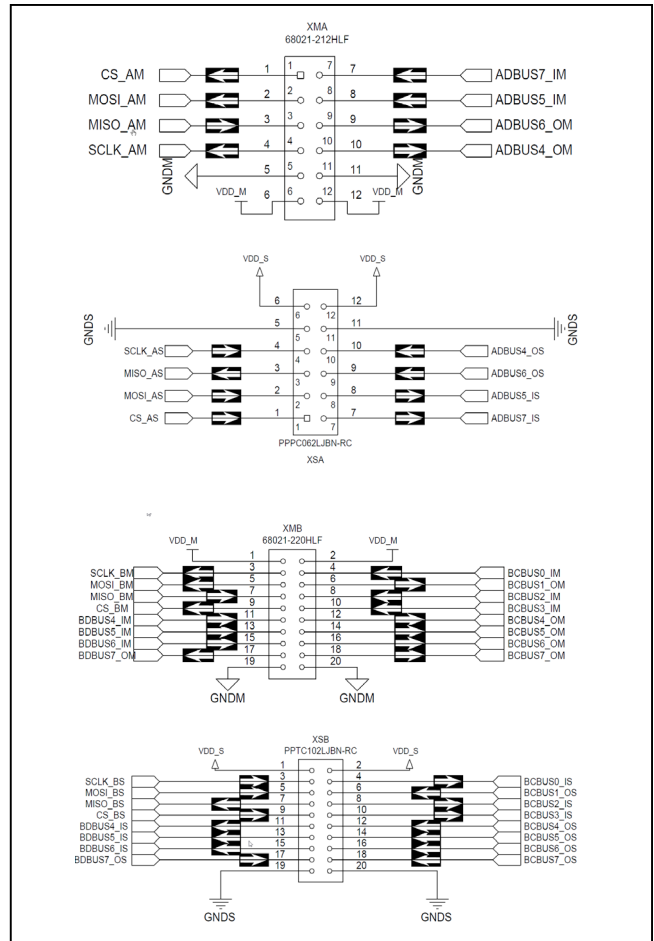


Figure 2. USB2GPIOISO# Subsystem Block Diagram

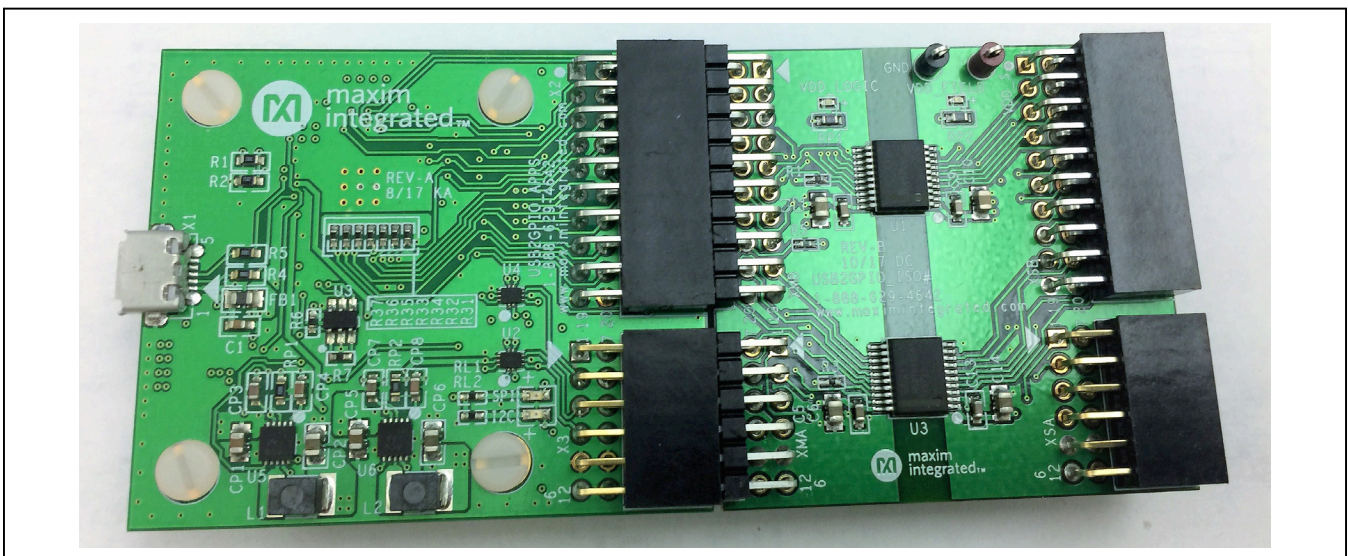


Figure 3. USB2GPIOISO# Board Connected with USB2GPIO# Adapter

**Master and Slave Connectors**

The USB2GPIOISO# is designed to receive power (VDD\_M, GNDM and VDD\_S, GNDS) from external boards through the connectors XMA, XMB, XSA and XSB. VDD\_S is defined by the type of board connected to the slave connectors. When the user selects certain tab in the Munich GUI, VDD\_M is automatically set to certain level, either 1.8V, 2.5V, 3.3V, or 5.0V. Note that USB2GPIOISO# does NOT provide power using VDD\_S to the Pmod or EV kit board, but instead expects to receive power from those boards. Test points VDD\_S and GND are provided to allow powering the USB2GPIOISO# slave side and Pmod or EV kit boards with external power supply.

Figure 4 shows the top view of the USB2GPIOISO# board, with the different connectors and the pin 1 identifiers. Note there are no jumpers or shunts on this board, all configuration is done under software control. Care should be taken to only insert the boards in the correct way as the connectors are not keyed to avoid false insertions. Reversing the connections (by turning the Pmod board upside down for example) may result in damage to the USB2GPIOISO# Pmod or EV kit board. Two LEDs are included to indicate if VDD\_M and VDD\_S are powered.

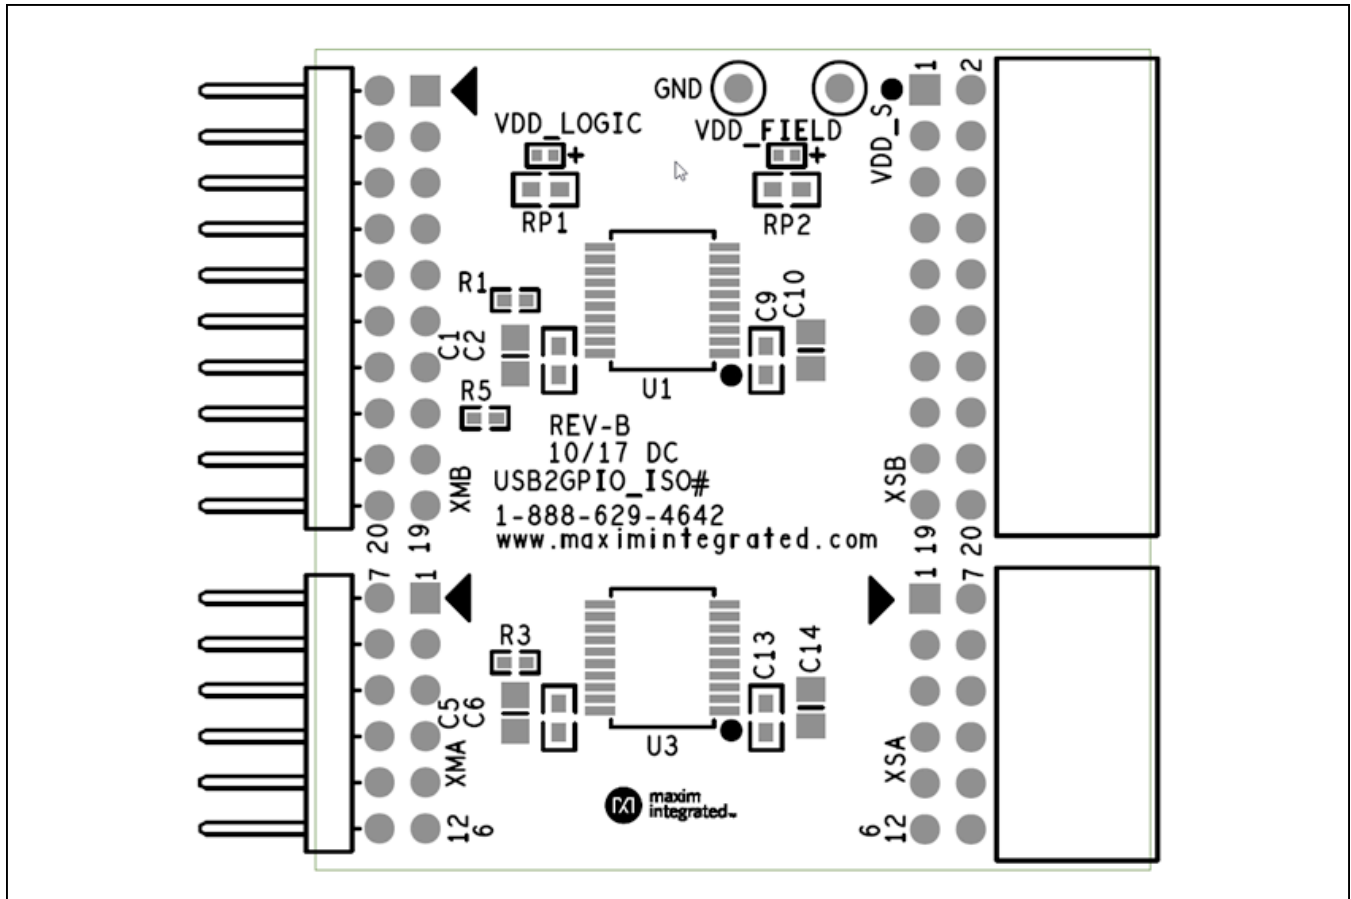


Figure 4. USB2GPIOISO# Orientation and Pinouts

**Ordering Information**

PART	TYPE
USB2GPIOISO#	Adapter Board

#Denotes RoHS compliant

USB2GPIOISO# Adapter Board Bill of Materials

ITEM	REF_DES	DNI/ DNP	QTY	MFG PART #	MANUFACTURER	VALUE	DESCRIPTION
1	C1, C3, C5, C7, C10, C12, C14, C16	-	8	CL21B106KQNNN	SAMSUNG ELECTRONICS	10UF	CAPACITOR; SMT (0805); CERAMIC CHIP; 10UF; 16V; TOL=10%; TG=-55 DEGC TO +125 DEGC; TC=X7R
2	C2, C4, C6, C8, C9, C11, C13, C15	-	8	GCJ188R71H104KA12; GCM188R71H104K; CGA3EZ7R1H104K080AA	MURATA; TDK	0.1UF	TOL=10%; TG=-55 DEGC TO +125 DEGC; TC=X7R; AUTO
3	GND	-	1	5001	KEYSTONE	N/A	BOARD HOLE=0.04IN; BLACK; PHOSPHOR BRONZE
4	R1-R4	-	4	CRCW040210K0FK; RC0402FR-0710K	VISHAY DALE; YAGEO PHICOMP	10K	RESISTOR; 0402; 10K; 1%; 100PPM; 0.0625W; THICK FILM
5	R5	-	1	TNPW04021K00BE	VISHAY DALE	1K	FILM
6	RP1, RP2	-	2	CRCW0603470RFK; ERJ-3EKF-4700	VISHAY DALE/PANASONIC	470	RESISTOR; 0603; 470 OHM; 1%; 100PPM; 0.10W; THICK FILM
7	U1-U4	-	4	MAX14483AAP+	MAXIM	+	POWER; 3.75KVRRMS; SPI DIGITAL ISOLATOR;
8	VDD_FIELD, VDD_LOGIC	-	2	SMLP12BC7T	ROHM	SMLP12BC7T	DIODE; LED; SML-P1 SERIES; PICOLED; BLUE; SMT (0402); VF=2.9V; IF=0.005A
9	VDD_S	-	1	5000	KEYSTONE	N/A	BOARD HOLE=0.04IN; RED; PHOSPHOR BRONZE
10	XMA	-	1	68021-212HLF	FCI CONNECT	68021-212HLF	BREAKAWAY HEADER; RIGHT ANGLE; 12PINS;
11	XMB	-	1	68021-220HLF	AMPHENOL ICC	68021-220HLF	BERGSTIK II BREAKAWAY HEADER; RIGHT ANGLE;
12	XSA	-	1	PPP062LJBN-RC	ELECTRONICS CORP.	PPP062LJBN-RC	CONNECTOR; FEMALE; THROUGH HOLE; 0.1IN CC; HEADER; 2 ROW; RIGHT ANGLE; 12PINS
13	XSB	-	1	PPTC102LJBN-RC	ELECTRONICS CORP	PPTC102LJBN-RC	CONNECTOR; FEMALE; THROUGH HOLE; BREAKAWAY HEADER; RIGHT ANGLE; 20PINS
14	PCB	-	1	USB2GPIO_ISO_APPS_B	MAXIM	PCB	PCB:USB2GPIO_ISO_APPS_B
TOTAL			36				


NOTE: DNI=> DO NOT INSTALL (PACKOUT); DNP=> DO NOT PROCURE








USB2GPIOISO# Adapter Board PCB Layout Diagrams (continued)

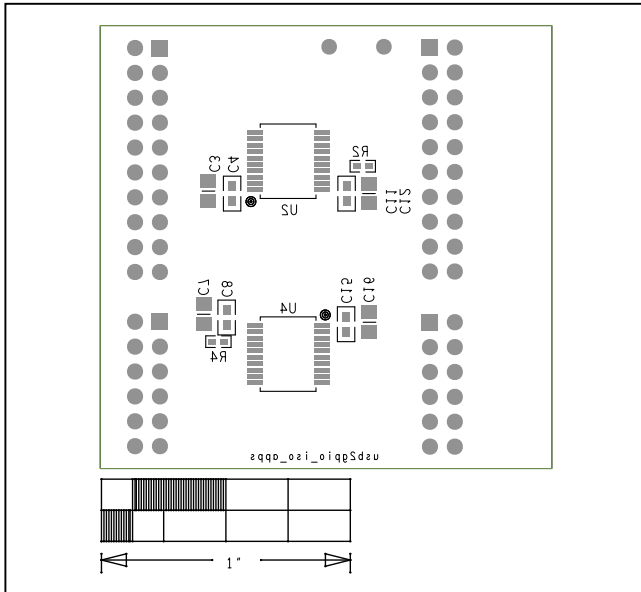

USB2GPIOISO# Adapter Board—Bottom Silkscreen

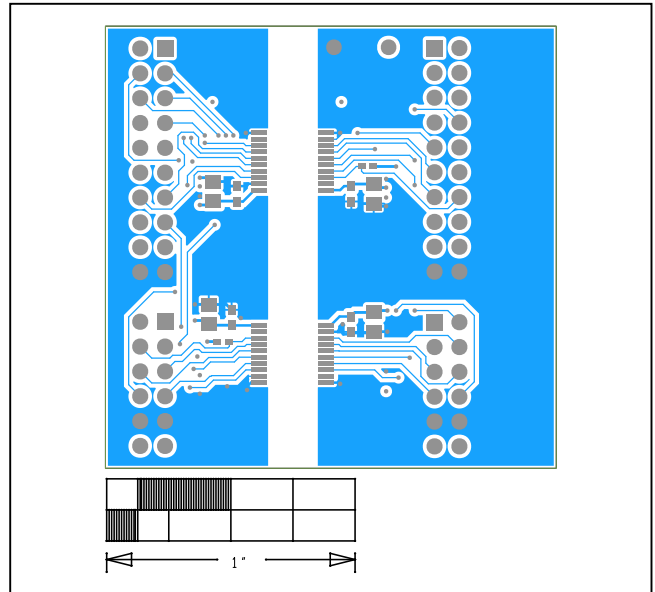

USB2GPIOISO# Adapter Board—Bottom

## Revision History

REVISION NUMBER	REVISION DATE	DESCRIPTION	PAGES CHANGED
0	04/18	Initial release	—

For pricing, delivery, and ordering information, please contact Maxim Direct at 1-888-629-4642, or visit Maxim Integrated's website at [www.maximintegrated.com](http://www.maximintegrated.com).

*Maxim Integrated cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim Integrated product. No circuit patent licenses are implied. Maxim Integrated reserves the right to change the circuitry and specifications without notice at any time.*





Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.