

ALUMINUM ELECTROLYTIC CAPACITORS





Snap-in Terminal Type, 105°C Ultra-Smaller-Sized

series



Smaller



- One rank smaller case sized than GG series.
- Suited for equipment down sizing.
- Compliant to the RoHS directive (2011/65/EU).

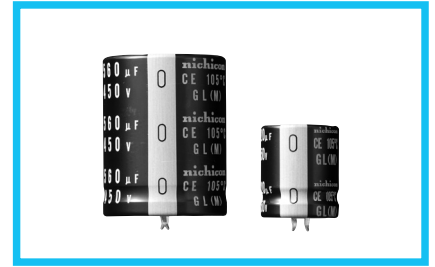

Specifications


| Item | Performance Characteristics | | | | | | | |
|-------------------------------|---|--|---------------------------------------|--|-------|---|-----------------|---|
| Category Temperature Range | - 25 to +105°C | | | | | | | |
| Rated Voltage Range | 400 · 450V | | | | | | | |
| Rated Capacitance Range | 120 to 1000μF | | | | | | | |
| Capacitance Tolerance | ±20% at 120Hz, 20°C | | | | | | | |
| Leakage Current | $I \leq 3\sqrt{CV}$ (μA) (After 5 minutes' application of rated voltage) [C : Rated Capacitance (μF) V : Voltage (V)] | | | | | | | |
| Tangent of loss angle (tan δ) | Rated voltage (V) | 400 450 | Measurement frequency : 120Hz at 20°C | | | | | |
| | tan δ (MAX.) | 0.15 0.20 | | | | | | |
| Stability at Low Temperature | Rated voltage (V) | 400 · 450 | Measurement frequency : 120Hz | | | | | |
| | Impedance ratio ZT/Z20 (MAX.) | Z - 25°C/Z+20°C 8 | | | | | | |
| Endurance | The specifications listed at right shall be met when the capacitors are restored to 20°C after D.C. bias plus rated ripple current is applied for 2000 hours at 105°C, the peak voltage shall not exceed the rated voltage. | <table border="1"> <tr> <td>Capacitance change</td> <td>Within ±20% of the initial capacitance value</td> </tr> <tr> <td>tan δ</td> <td>200% or less than the initial specified value</td> </tr> <tr> <td>Leakage current</td> <td>Less than or equal to the initial specified value</td> </tr> </table> | Capacitance change | Within ±20% of the initial capacitance value | tan δ | 200% or less than the initial specified value | Leakage current | Less than or equal to the initial specified value |
| Capacitance change | Within ±20% of the initial capacitance value | | | | | | | |
| tan δ | 200% or less than the initial specified value | | | | | | | |
| Leakage current | Less than or equal to the initial specified value | | | | | | | |
| Shelf Life | After storing the capacitors under no load at 105°C for 1000 hours and then performing voltage treatment based on JIS C 5101-4 clause 4.1 at 20°C, they shall meet the characteristic requirements listed at right. | <table border="1"> <tr> <td>Capacitance change</td> <td>Within ±20% of the initial capacitance value</td> </tr> <tr> <td>tan δ</td> <td>200% or less than the initial specified value</td> </tr> <tr> <td>Leakage current</td> <td>Less than or equal to the initial specified value</td> </tr> </table> | Capacitance change | Within ±20% of the initial capacitance value | tan δ | 200% or less than the initial specified value | Leakage current | Less than or equal to the initial specified value |
| Capacitance change | Within ±20% of the initial capacitance value | | | | | | | |
| tan δ | 200% or less than the initial specified value | | | | | | | |
| Leakage current | Less than or equal to the initial specified value | | | | | | | |
| Marking | Printed with white color letter on black sleeve. | | | | | | | |

Drawing

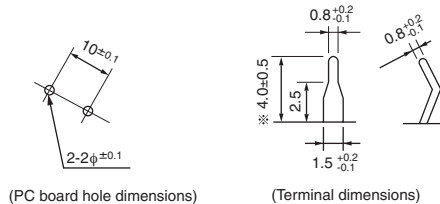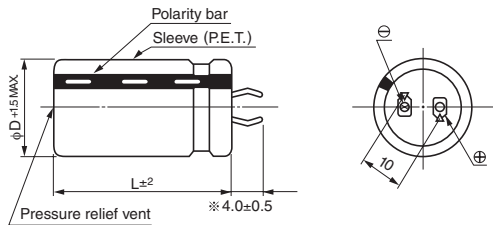

※ The other terminal is also available upon request. Please refer page 326 for schematic of dimensions.

Type numbering system (Example : 400V 150μF)

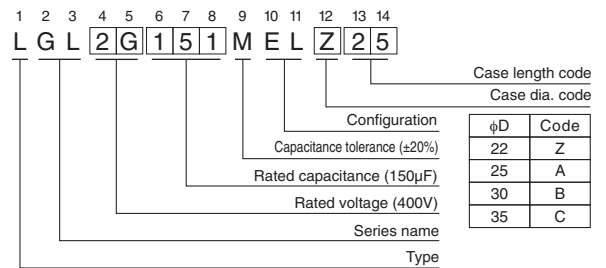

Frequency coefficient of rated ripple current

| Frequency (Hz) | 50 | 60 | 120 | 300 | 1 k | 10k | 50k or more |
|----------------|------------|------|------|------|------|------|-------------|
| Coeff. | 400 · 450V | 0.77 | 0.82 | 1.00 | 1.16 | 1.30 | 1.41 |

Minimum order quantity : 50pcs.

- Dimension table in next page.



■Dimensions

| 400V (2G) | | | | |
|-----------|-----------------|-------------------|----------------------|----------------|
| Cap. (μF) | Size φD × L(mm) | Rated ripple (mA) | Leakage Current (mA) | Code |
| 150 | 22 × 25 | 730 | 0.73 | LGL2G151MELZ25 |
| 220 | 22 × 30 | 780 | 0.88 | LGL2G221MELZ30 |
| | 25 × 25 | 780 | 0.88 | LGL2G221MELA25 |
| 270 | 22 × 35 | 910 | 0.98 | LGL2G271MELZ35 |
| | 25 × 30 | 910 | 0.98 | LGL2G271MELA30 |
| 330 | 22 × 45 | 1070 | 1.08 | LGL2G331MELZ45 |
| | 25 × 35 | 1070 | 1.08 | LGL2G331MELA35 |
| | 30 × 25 | 1040 | 1.08 | LGL2G331MELB25 |
| 390 | 22 × 50 | 1230 | 1.18 | LGL2G391MELZ50 |
| | 25 × 40 | 1230 | 1.18 | LGL2G391MELA40 |
| | 30 × 30 | 1230 | 1.18 | LGL2G391MELB30 |
| | 35 × 25 | 1180 | 1.18 | LGL2G391MELC25 |
| 470 | 25 × 45 | 1500 | 1.30 | LGL2G471MELA45 |
| | 30 × 35 | 1500 | 1.30 | LGL2G471MELB35 |
| 560 | 30 × 40 | 1660 | 1.41 | LGL2G561MELB40 |
| | 35 × 30 | 1660 | 1.41 | LGL2G561MELC30 |
| 680 | 30 × 45 | 1740 | 1.56 | LGL2G681MELB45 |
| | 35 × 35 | 1740 | 1.56 | LGL2G681MELC35 |
| 820 | 30 × 50 | 1920 | 1.71 | LGL2G821MELB50 |
| | 35 × 40 | 1920 | 1.71 | LGL2G821MELC40 |
| 1000 | 35 × 50 | 2200 | 1.89 | LGL2G102MELC50 |

| 450V (2W) | | | | |
|-----------|-----------------|-------------------|----------------------|----------------|
| Cap. (μF) | Size φD × L(mm) | Rated ripple (mA) | Leakage Current (mA) | Code |
| 120 | 22 × 25 | 690 | 0.69 | LGL2W121MELZ25 |
| 150 | 22 × 30 | 740 | 0.77 | LGL2W151MELZ30 |
| | 25 × 25 | 740 | 0.77 | LGL2W151MELA25 |
| 180 | 22 × 35 | 770 | 0.85 | LGL2W181MELZ35 |
| | 25 × 30 | 770 | 0.85 | LGL2W181MELA30 |
| 220 | 22 × 40 | 850 | 0.94 | LGL2W221MELZ40 |
| | 25 × 35 | 850 | 0.94 | LGL2W221MELA35 |
| | 30 × 25 | 820 | 0.94 | LGL2W221MELB25 |
| 270 | 22 × 45 | 930 | 1.04 | LGL2W271MELZ45 |
| | 25 × 40 | 930 | 1.04 | LGL2W271MELA40 |
| | 30 × 30 | 930 | 1.04 | LGL2W271MELB30 |
| 330 | 25 × 45 | 1120 | 1.15 | LGL2W331MELA45 |
| | 30 × 35 | 1120 | 1.15 | LGL2W331MELB35 |
| | 35 × 25 | 1070 | 1.15 | LGL2W331MELC25 |
| 390 | 25 × 50 | 1280 | 1.25 | LGL2W391MELA50 |
| | 30 × 40 | 1280 | 1.25 | LGL2W391MELB40 |
| | 35 × 30 | 1280 | 1.25 | LGL2W391MELC30 |
| 470 | 30 × 45 | 1480 | 1.37 | LGL2W471MELB45 |
| | 35 × 35 | 1480 | 1.37 | LGL2W471MELC35 |
| 560 | 30 × 50 | 1660 | 1.50 | LGL2W561MELB50 |
| | 35 × 40 | 1660 | 1.50 | LGL2W561MELC40 |
| 680 | 35 × 45 | 1770 | 1.65 | LGL2W681MELC45 |
| 820 | 35 × 50 | 1930 | 1.82 | LGL2W821MELC50 |

Rated ripple current (mArms) at 105°C 120Hz



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.