



Test Procedure for the LV3319PMGEVB Evaluation Board

Test Items


***Step check**

Input gain, Volume, Equalizer, Fader, General-purpose volume

***Characteristic**

Loudness, Equalizer, Zero cross, Soft mute, Soft step,
Output noise voltage, THD, Maximum input voltage,
Input selector, Tone path switching, Fader Front output select,
General purpose input mode select, Fade Rear output select,
EXTout select ,MUTE switch

Test Setup 1

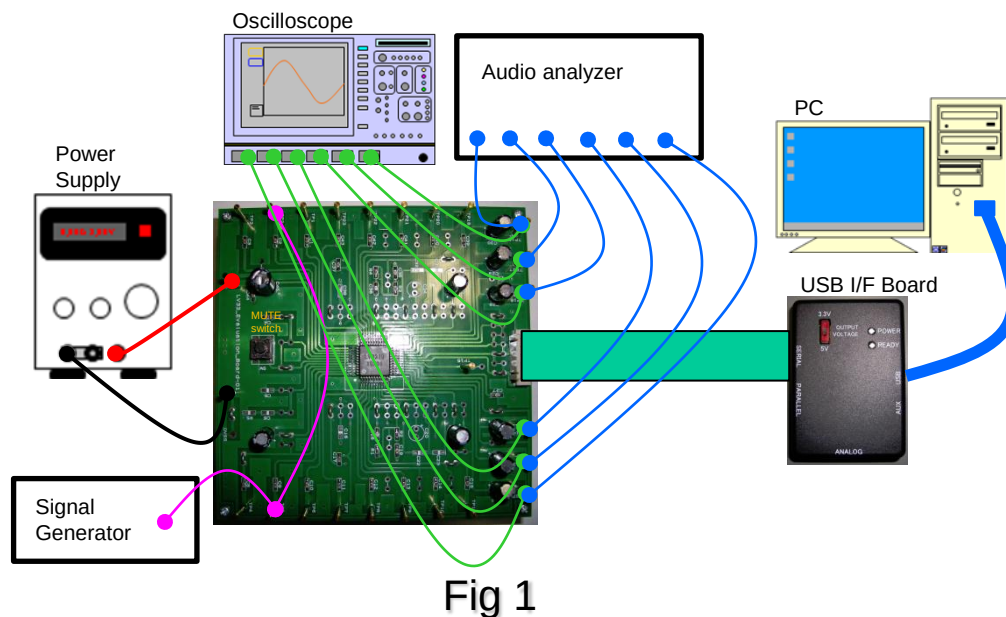

Equipment :


- ✓ Power Supply ... 1pc
- ✓ Oscilloscope ... 1pc
- ✓ Signal Generator ... 1pc
- ✓ Audio analyzer ... 1pc
- ✓ PC ... 1pc
- ✓ USB I/F Board ... 1pc
- ✓ LV3319PM Evaluation_Board ... 1pc

Step check1 : Input gain

- ❑ Set up (Refer to Fig1)
- ❑ Please apply an electric power supply:9V.
- ❑ Input signal : $V_{IN} = -20\text{dB}$, $f = 1\text{kHz}$ → ch1(TP2,TP5)
- ❑ Setting from PC
 - Set Input selector in ch1. Each setting level:FLAT .
 - Transmit Input gain data. Confirm an output waveform.

Check the waveform in OSC. Confirm the step level in Audio Analyzer.

About the following waveforms. Setting of Input gain: Waveform of 0dB/6dB/12dB/18dB

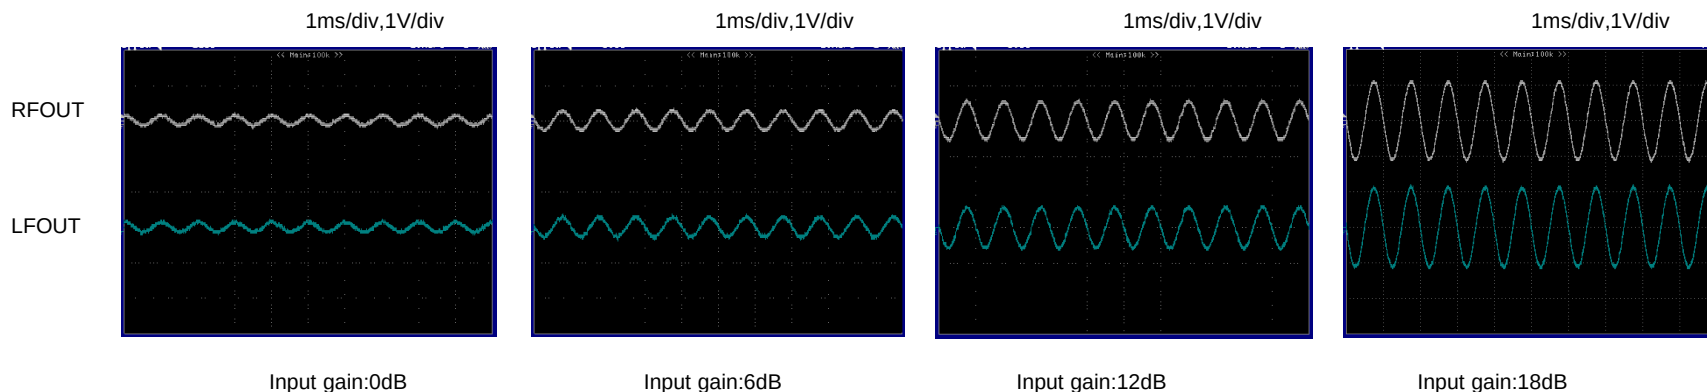




Step check2 : Volume

- ❑ Set up (Refer to Fig1)
- ❑ Please apply an electric power supply:9V.
- ❑ Input signal : **VIN=-10dB,f=1kHz**→ch1(TP2,TP5)
- ❑ Setting from PC
 - Set Input selector in ch1. Each setting level:FLAT .
 - Transmit Volume data. Confirm an output waveform.

Check the waveform in OSC. Confirm the step level in Audio Analyzer.

About the following waveforms. Setting of Volume: Waveform of 10dB/5dB/0dB/-5dB

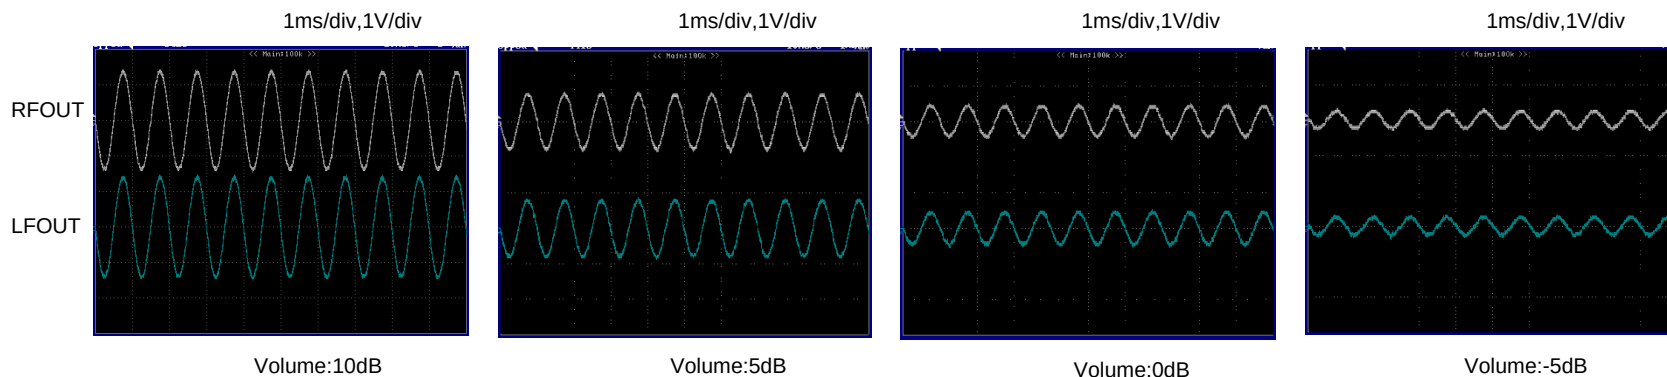




Step check3 : Equalizer (Bass)

- ❑ Set up (Refer to Fig1)
- ❑ Please apply an electric power supply:9V.
- ❑ Input signal : **VIN=-20dB,f=100Hz**→ch1(TP2,TP5)
- ❑ Setting from PC
 - Set Input selector in ch1. Each setting level:FLAT .
 - Set Bass menu (Center frequency:f0 / Quality factor:Q) → f0:100Hz,Q:1
 - Transmit Bass gain data. Confirm an output waveform.

Check the waveform in OSC. Confirm the step level in Audio Analyzer.

About the following waveforms. Setting of Bass gain: Waveform of +20dB/+10dB/-10dB/-20dB

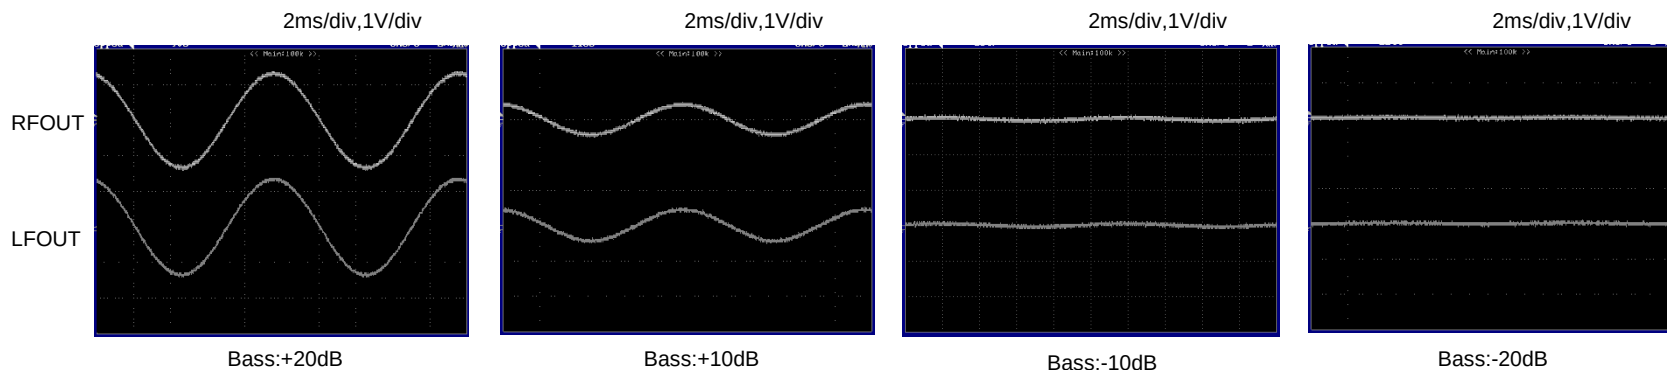




Step check4 : Equalizer (Mid)

- ❑ Set up (Refer to Fig1)
- ❑ Please apply an electric power supply:9V.
- ❑ Input signal : **VIN=-20dB,f=1kHz**→ch1(TP2,TP5)
- ❑ Setting from PC
 - Set Input selector in ch1. Each setting level:FLAT .
 - Set Mid menu (Center frequency:f0 / Quality factor:Q) → f0:1kHz,Q:1
 - Transmit Mid gain data. Confirm an output waveform.

Check the waveform in OSC. Confirm the step level in Audio Analyzer.

About the following waveforms. Setting of Mid gain: Waveform of +20dB/+10dB/-10dB/-20dB

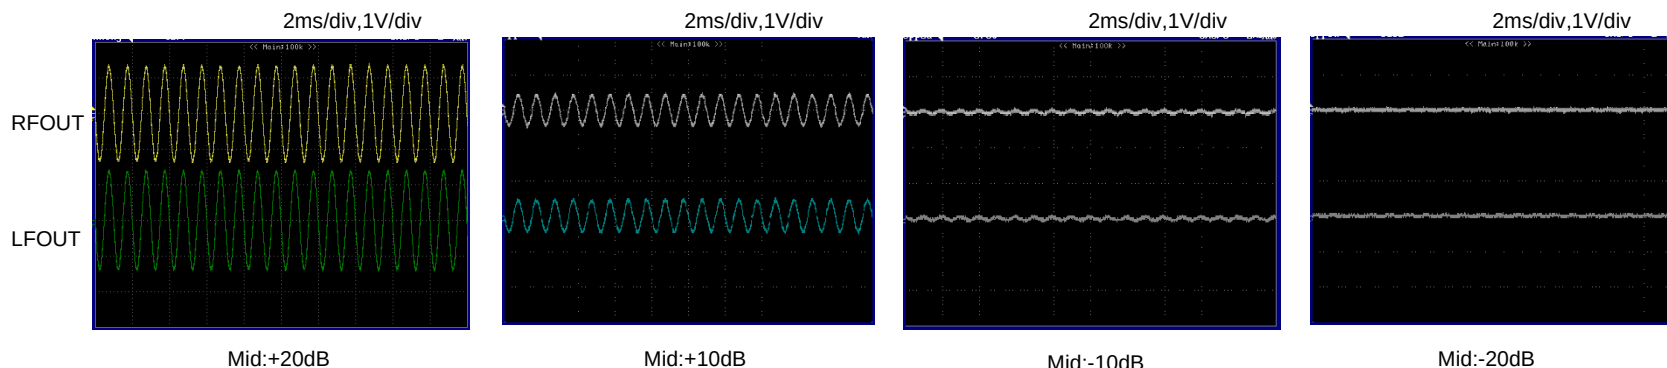




Step check5 : Equalizer (Treble)

- ❑ Set up (Refer to Fig1)
- ❑ Please apply an electric power supply:9V.
- ❑ Input signal : **VIN=-20dB,f=10kHz**→ch1(TP2,TP5)
- ❑ Setting from PC
 - Set Input selector in ch1. Each setting level:FLAT .
 - Set Treble menu (Center frequency:f0 / Quality factor:Q) → f0:10kHz,Q:1
 - Transmit Treble gain data. Confirm an output waveform.

Check the waveform in OSC. Confirm the step level in Audio Analyzer.

About the following waveforms. Setting of Treble gain: Waveform of +20dB/+10dB/-10dB/-20dB.

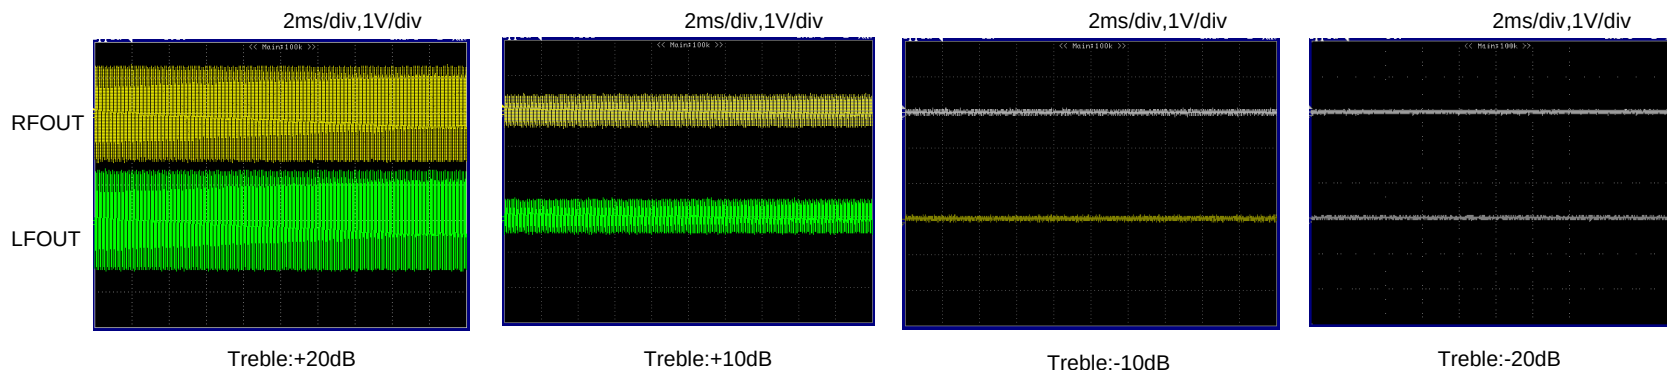


Step check6 : Fader

- Set up (Refer to Fig1)
- Please apply an electric power supply:9V.
- Input signal : **VIN=0dB,f=1kHz**→ch1(TP2,TP5)
- Setting from PC
 - Set Input selector in ch1. Each setting level:FLAT .
 - Transmit Fader data. Confirm an output waveform.

Check the waveform in OSC. Confirm the step level in Audio Analyzer.

About the following waveforms. Setting of Fader (RF/RR/LF/LR): Waveform of -12dB.

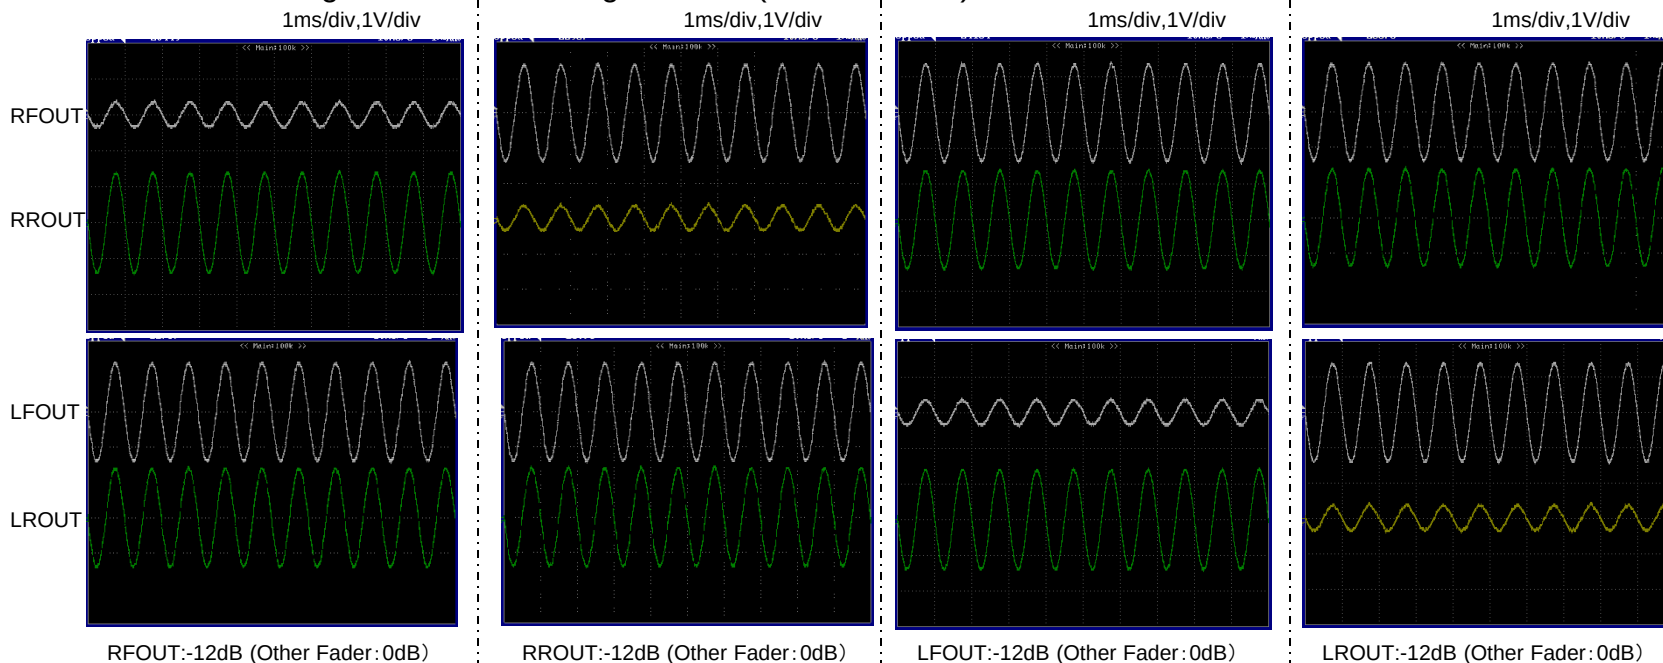



Test Setup 2

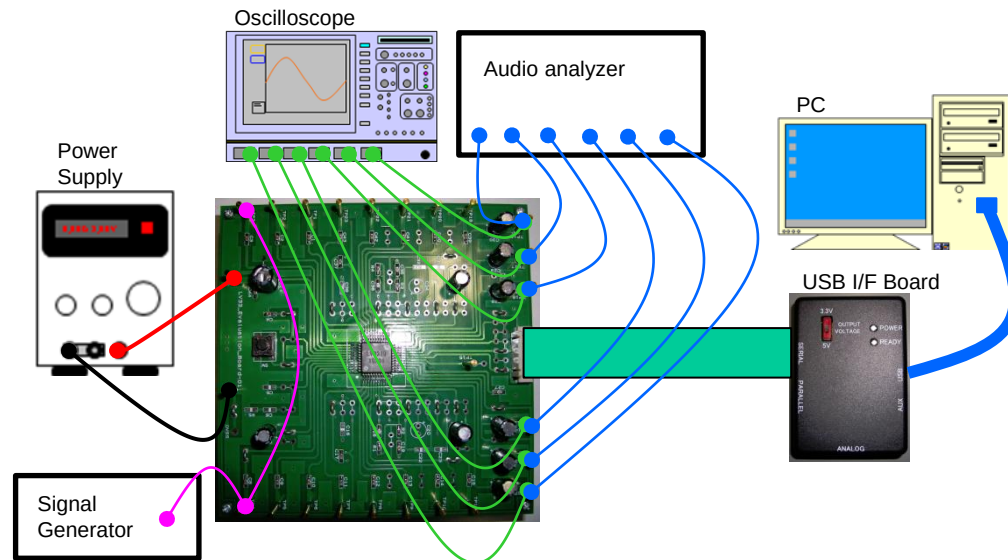


Fig 2




Step check7 : General-purpose volume

- ❑ PSet up (Refer to Fig2)
- ❑ Please apply an electric power supply:9V.
- ❑ Input signal : **VIN=0dB,f=1kHz**→EXLIN/EXRIN(TP3,TP4)
- ❑ Setting from PC
 - Set Input selector in ch1. Each setting level:FLAT .
 - Transmit General-purpose volume data. Confirm an output waveform.

Check the waveform in OSC. Confirm the step level in Audio Analyzer.

About the following waveforms. Setting of General-purpose volume: Waveform of 0dB/-6dB/-12dB/-18dB.

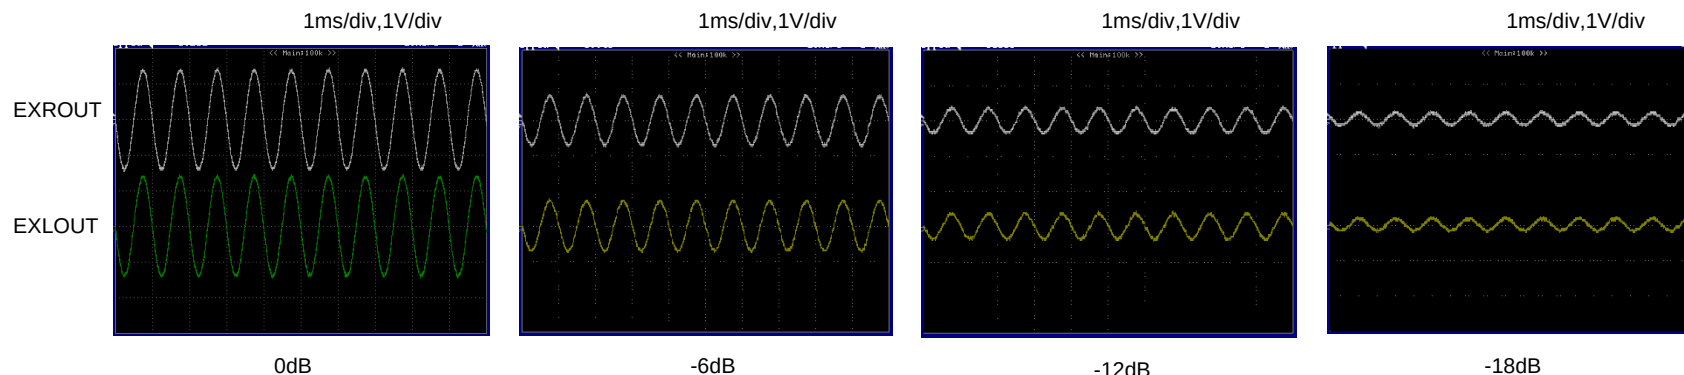




Characteristic1 : Loudness

- ❑ Set up (Refer to Fig1)
- ❑ Please apply an electric power supply:9V.
- ❑ Input signal level : **VIN=0dB**→ch1(TP2,TP5)
- ❑ Setting from PC
 - Set Input selector in ch1. Each setting level:FLAT .
 - Transmit Volume data -32dB and Loudness mode ON.
 - Confirm output level : input frequency 100Hz/1kHz/10kHz.

Check the waveform in OSC. Confirm the output level in Audio Analyzer.


About the following waveforms. Condition : Loudness ON/OFF, input frequency 100Hz/1kHz/10kHz.

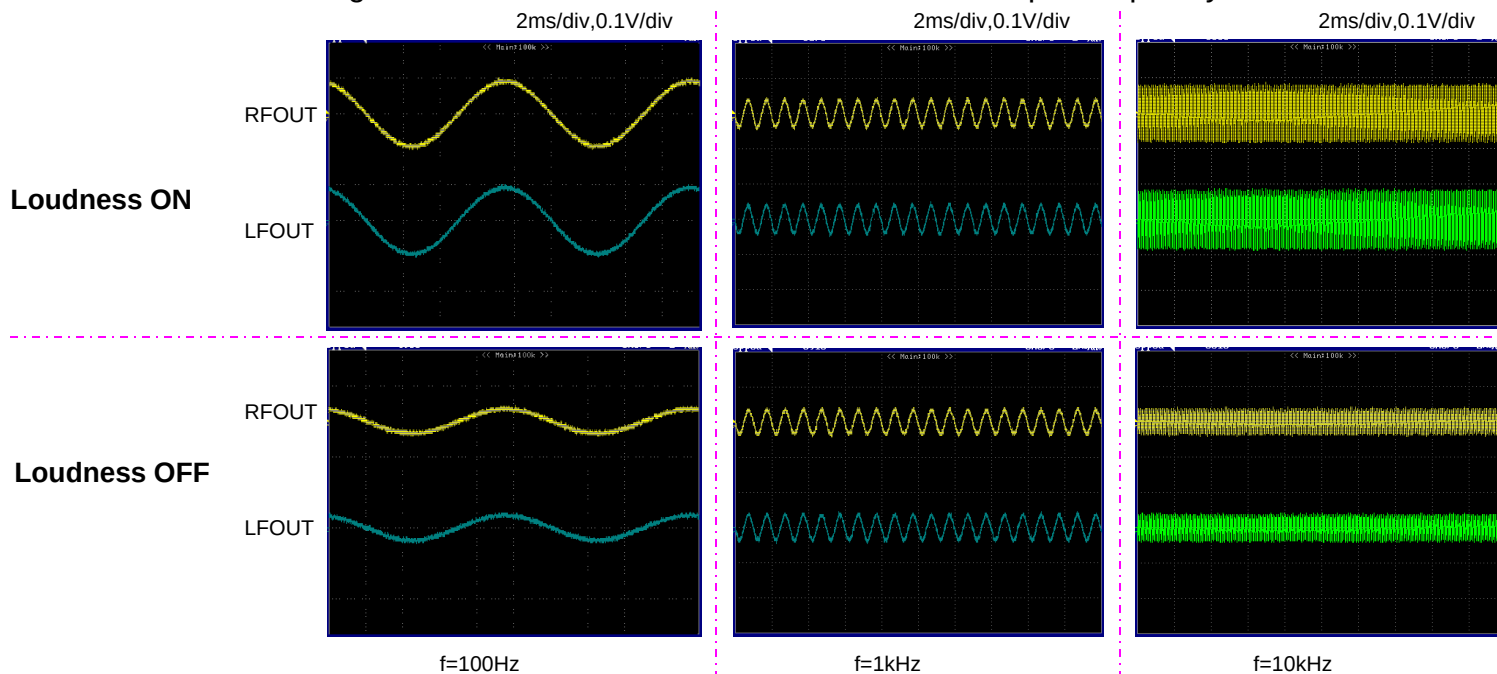



Characteristic2 : Equalizer(Bass)


- ❑ Set up (Refer to Fig1)
 - ❑ Please apply an electric power supply:9V.
 - ❑ Input signal level : **VIN=-20dB**→ch1(TP2,TP5)
 - ❑ Setting from PC
 - Set Input selector in ch1. Each setting level:FLAT .
 - Transmit Bass data .(Data contents: Gain=+20dB, $f_0=100\text{Hz}$, $Q=1$)
 - Confirm output level : input frequency 100Hz/1kHz/10kHz.
- Check the waveform in OSC. Confirm the output level in Audio Analyzer.
About the following waveforms. Condition : input frequency 100Hz/1kHz/10kHz.

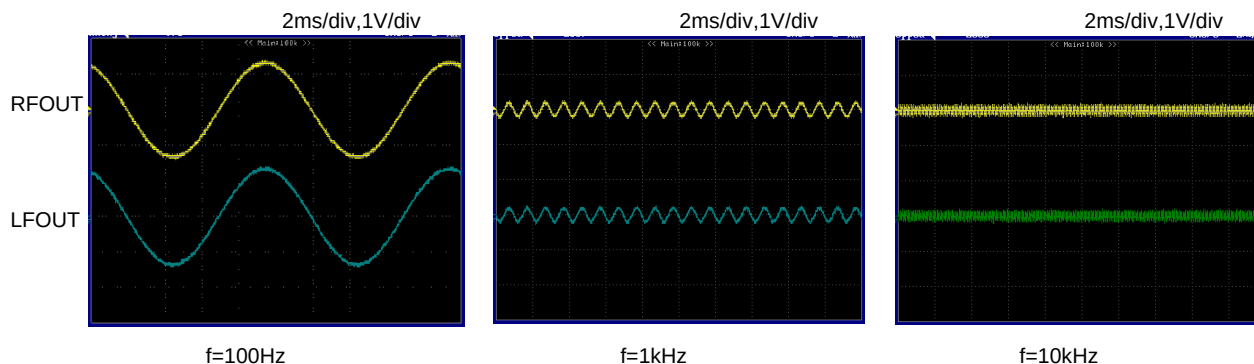



Characteristic3 : Equalizer(Mid)

- ❑ Set up (Refer to Fig1)
 - ❑ Please apply an electric power supply:9V.
 - ❑ Input signal level : **VIN=-20dB**→ch1(TP2,TP5)
 - ❑ Setting from PC
 - Set Input selector in ch1. Each setting level:FLAT .
 - Transmit Mid data .(Data contents: Gain=+20dB, f0=1kHz, Q=1)
 - Confirm output level : input frequency 100Hz/1kHz/10kHz.
- Check the waveform in OSC. Confirm the output level in Audio Analyzer.
About the following waveforms. Condition : input frequency 100Hz/1kHz/10kHz.

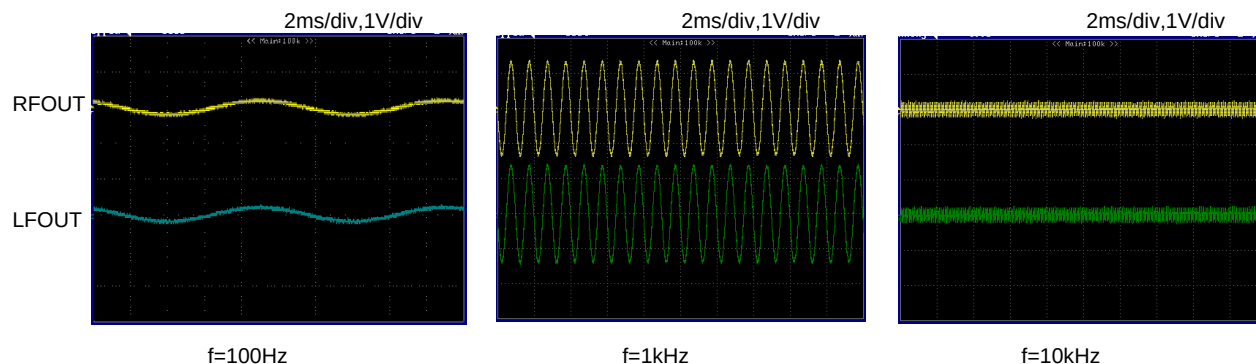




Characteristic4 : Equalizer(Treble)

- ❑ Set up (Refer to Fig1)
- ❑ Please apply an electric power supply:9V.
- ❑ Input signal level : **VIN=-20dB**→ch1(TP2,TP5)
- ❑ Setting from PC
 - Set Input selector in ch1. Each setting level:FLAT .
 - Transmit Treble data .(Data contents: Gain=+20dB, f0=10kHz, Q=1)
 - Confirm output level : input frequency 100Hz/1kHz/10kHz.

Check the waveform in OSC. Confirm the output level in Audio Analyzer.
About the following waveforms. Condition : input frequency 100Hz/1kHz/10kHz.

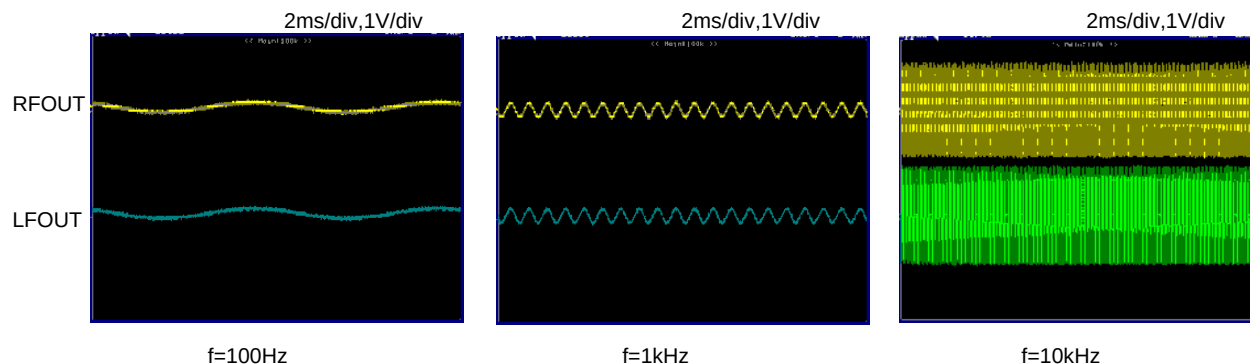




Characteristic5 : Zero cross

- ❑ Set up (Refer to Fig1)
- ❑ Please apply an electric power supply:9V.
- ❑ Input signal : $V_{IN}=0\text{dB}, f=1\text{kHz}$ → ch1(TP2,TP5)
- ❑ Setting from PC
 - Set Input selector in ch1. Each setting level:FLAT .
 - Transmit Zero cross ON data .(Data contents: Zero cross detection =Input Gain)


Check the waveform in OSC.

About the following waveforms. Condition: Zero cross ON/OFF, Volume setting ($0\text{dB} \rightarrow -\infty$, $-\infty \rightarrow 0\text{dB}$)

Zero cross ON

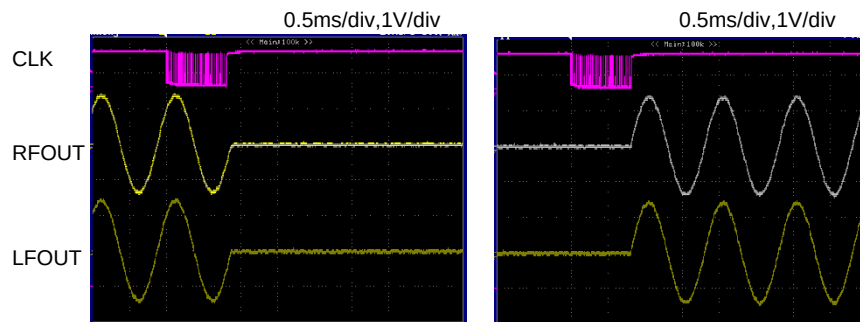

Zero cross OFF

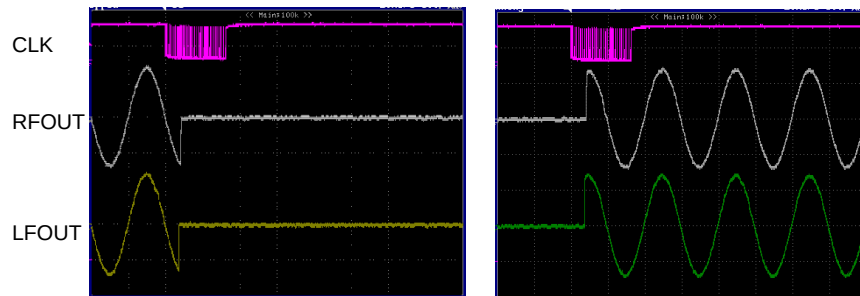




Characteristic6 : Soft mute

- ❑ Set up (Refer to Fig1)
- ❑ Please apply an electric power supply:9V.
- ❑ Input signal : $V_{IN}=0dB, f=1kHz$ → ch1(TP2,TP5)
- ❑ Setting from PC
 - Set Input selector in ch1. Each setting level:FLAT .
 - Transmit Mute ON.

(Data contents: Soft mute; mode ON, Mute setting Time select ; 0.64ms/5.12ms/40ms/80ms, Mute setting;ON)

Check the waveform in OSC.

About the following waveforms. Condition: Soft mute ON/OFF, Mute setting ON/OFF,Mute setting Time=5.12ms

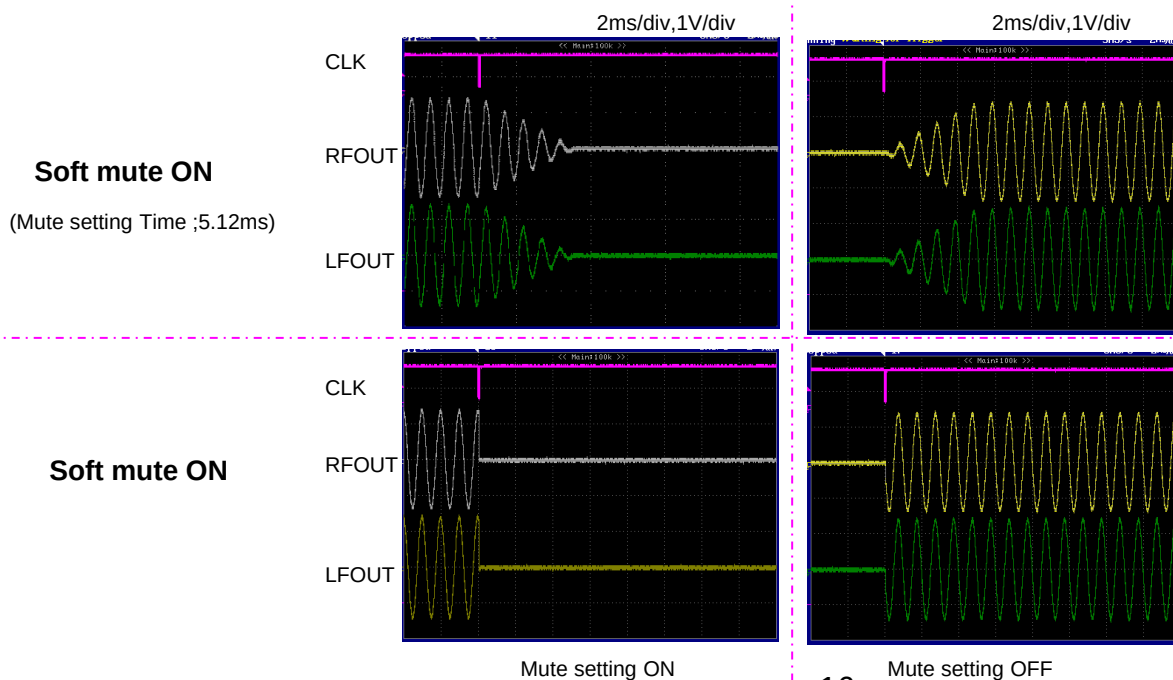



Characteristic7 : Soft step


- ❑ Set up (Refer to Fig1)
- ❑ Please apply an electric power supply:9V.
- ❑ Input signal : $V_{IN}=0\text{dB}, f=1\text{kHz}$ →ch1(TP2,TP5)
- ❑ Setting from PC
 - Set Input selector in ch1. Each setting level:FLAT .
 - Transmit Equalizer step data.

(Data contents: Soft step; mode ON, Soft step Time select ; 10ms/20ms/40ms/80ms)


Check the waveform in OSC.

About the following waveforms. Condition: Soft step ON/OFF, Equalizer (Mid gain 0dB→-6dB,-6dB→0dB),Soft step Time=10ms

Soft step ON
(Soft step Time ;10ms)

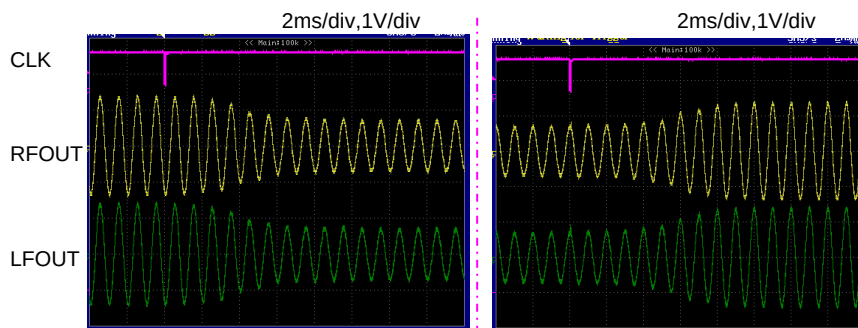

Soft step OFF

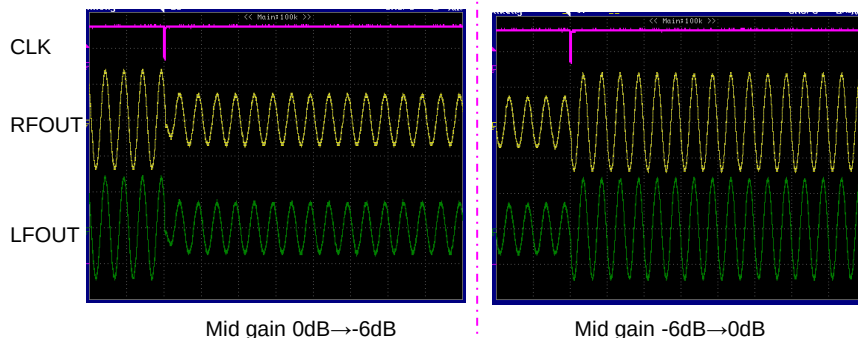

Test Setup 3

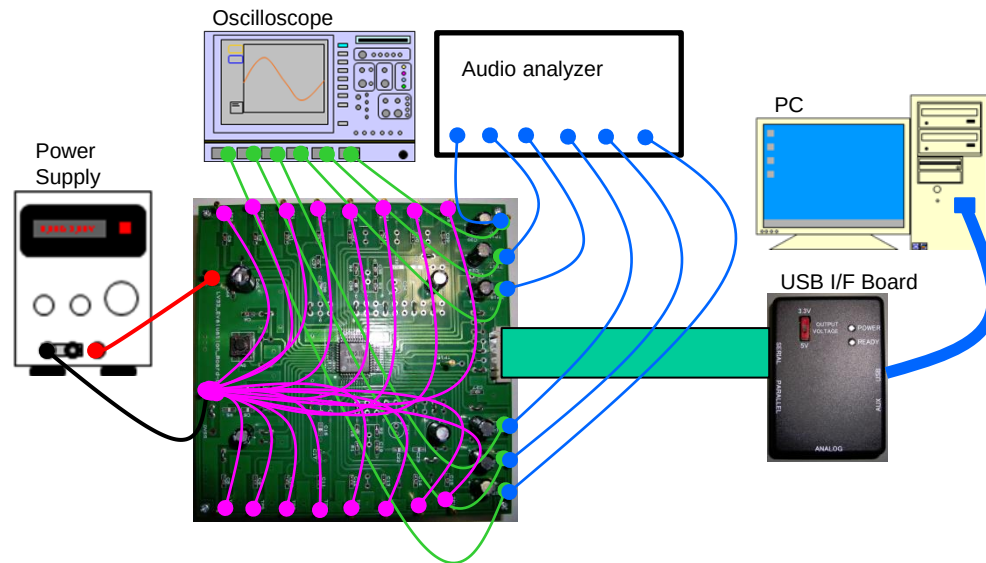


Fig 3



Characteristic8 : Output noise voltage

- ❑ Set up (Refer to Fig3)
 - ❑ Please apply an electric power supply:9V.
 - ❑ Input pin is all GND.
 - ❑ Setting from PC
 - Set Input selector in ch1. Each setting level:FLAT .
- Confirm the output level in Audio Analyzer.→noise level check

Characteristic9 : THD

- ❑Set up (Refer to Fig1)
 - ❑ Please apply an electric power supply:9V.
 - ❑Input signal : $V_{IN}=0dB, f=1kHz$ →ch1(TP2,TP5)
 - ❑Setting from PC
 - Set Input selector in ch1. Each setting level:FLAT.
- Confirm the output level in Audio Analyzer.→THD

Characteristic10 : Maximum input voltage

- ❑Set up (Refer to Fig1)
 - ❑ Please apply an electric power supply:9V.
 - ❑Input frequency: $1kHz$ →ch1(TP2,TP5)
 - ❑Setting from PC
 - Set Input selector in ch1. Each setting level:FLAT.
- The output level adjust V_{IN} to become level of $THD=1\%$.
Confirm level of V_{IN} in Audio Analyzer .→Maximum input voltage



Characteristic11 : Input selector

- ❑ Please apply an electric power supply:9V.
 - ❑ Connect Signal Generator to the channel which wants to input a signal (input signal :VIN=0dB,f=1kHz).
Other input channel ,OPEN.
 - ❑ Setting from PC
 - Selector channel set. Each of other setting level : FLAT.
 - Check the waveform in OSC. →Confirm the output waveform of FLAT.
 - Choose the channel which does not enter of the signal . →Confirm the output waveform of no signal.
- In the case of set up (Refer to Fig1) , ch1:signal input, other input channel: OPEN .

Characteristic12 : Tone path switching

- ❑ Set up (Refer to Fig1)
 - ❑ Please apply an electric power supply:9V.
 - ❑ Input signal : VIN=0dB,f=1kHz→ch1(TP2,TP5)
 - ❑ Setting from PC
 - Each setting level:FLAT .
 - Set Input selector in ch1. Mid menu set →gain=-6dB ,f0=1kHz,Q=1 (Other setting level : FLAT)
- Waveform confirmation.(Condition:Tone circuitry block Pass /Detour)

Characteristic13 : Fader Front output select

- ❑ Set up (Refer to Fig1)
 - ❑ Please apply an electric power supply:9V
 - ❑ Input signal : VIN=0dB,f=1kHz→ch1(TP2,TP5), VIN=0dB,f=10kHz→EXLIN/EXRIN(TP3,TP4)
 - ❑ Setting from PC
 - Each setting level:FLAT .
 - Set Input selector in ch1. Fader Fronf output select.(In the case of “Fader”select /In the case of ”Volume C”select)
- Check the waveform in OSC.



Characteristic14 : General purpose input mode select

- ❑ Set up (Refer to Fig2)
- ❑ Please apply an electric power supply:9V.
- ❑ Input : **VIN=0dB,f=1kHz**→EXLIN(TP3) / OPEN→EXRIN(TP4)
- ❑ Setting from PC
 - Each setting level:FLAT .
 - Condition: General_Input_select→EXLIN. General-purpose Input Mode→MONORALConfirm the EXLOUT/EXROUT output waveform .
 - Condition: General-purpose Input Mode→STEREOConfirm the EXLOUT/EXROUT output waveform .
- ❑ Input : **VIN=0dB,f=1kHz**→EXRIN(TP4) / OPEN→EXLIN(TP3)
- ❑ Setting from PC
 - Condition: General_Input_select→EXRIN.Confirm the EXLOUT/EXROUT output waveform .
Check the waveform in OSC.

Characteristic15 : Fader Rear output select

- ❑ Set up (Refer to Fig1)
- ❑ Please apply an electric power supply:9V.
- ❑ Input signal : **VIN=0dB,f=1kHz**→ch1(TP2,TP5) / **VIN=0dB,f=10kHz**→ch2(TP1,TP6)
- ❑ Setting from PC
 - Each setting level:FLAT .
 - Condition:Input selector(1)→ch1, Input selector(2)→ch2 (Other setting level : FLAT)Confirm the LROUT/RROUT output waveform .
Fader Rear output select.(In the case of "Lch/Rch_Input1"select /In the case of " Lch/Rch_Input2"select)
Check the waveform in OSC.

Test Setup 4

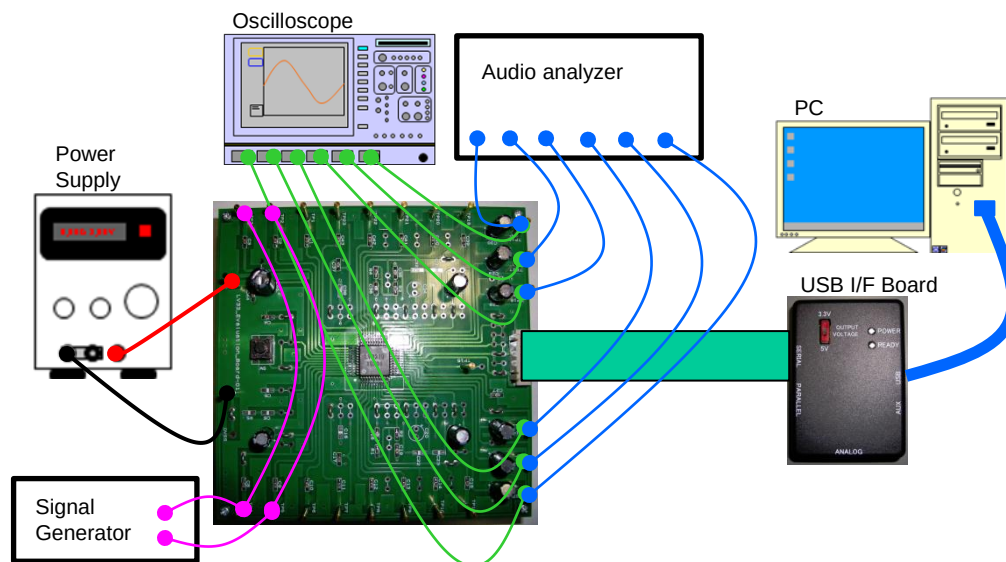


Fig 4



Characteristic16 : EXTout select

- ❑ Set up (Refer to Fig4)
- ❑ Please apply an electric power supply:9V.
- ❑ Input signal : **VIN=0dB,f=1kHz**→ch1(TP2,TP5) / **VIN=0dB,f=10kHz**→EXLIN/EXRIN(TP3,TP4)
- ❑ Setting from PC
 - Each setting level:FLAT .
 - Input selector(2)→ch1 (Other setting level : FLAT)

Confirm the EXLOUT/EXROUT output waveform .

EXTout select.(In the case of "EXTIN"select /In the case of "Input2"select)

Check the waveform in OSC.




Characteristic17 : MUTE switch

- ❑ Set up (Refer to Fig1)
- ❑ Please apply an electric power supply:9V.
- ❑ Input signal : $V_{IN}=0\text{dB}$, $f=1\text{kHz}$ → ch1(TP2,TP5)
- ❑ Setting from PC
 - Set Input selector in ch1. Each setting level:FLAT.

Check the waveform in OSC. → Confirm the output waveform of FLAT.

Push "MUTE switch of the Evaluation board. → Confirm the output waveform of no signal.

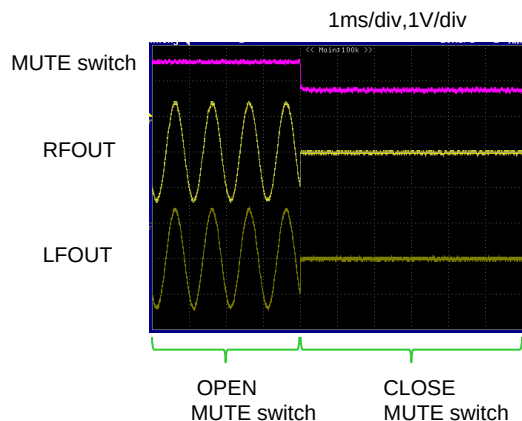



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.